

FIG. 1a

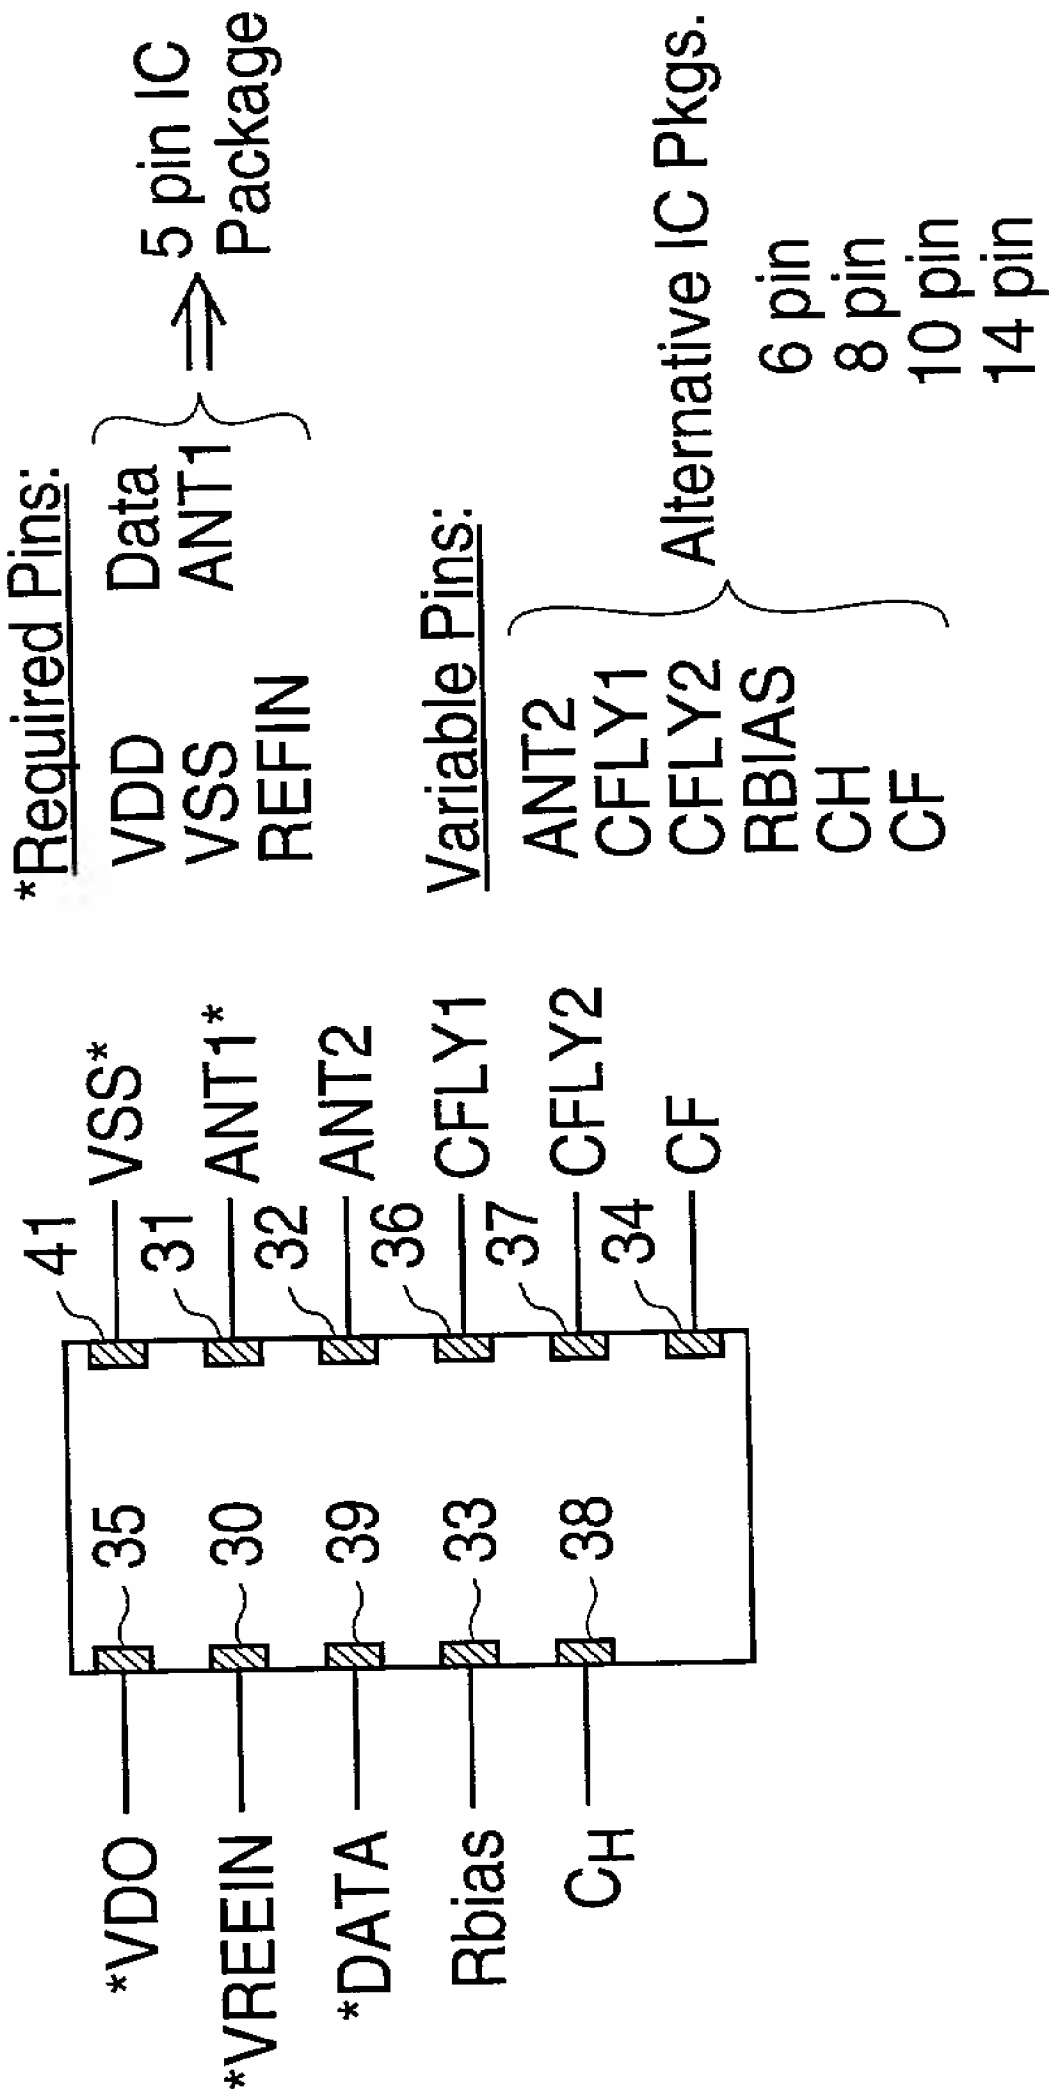


FIG. 1b

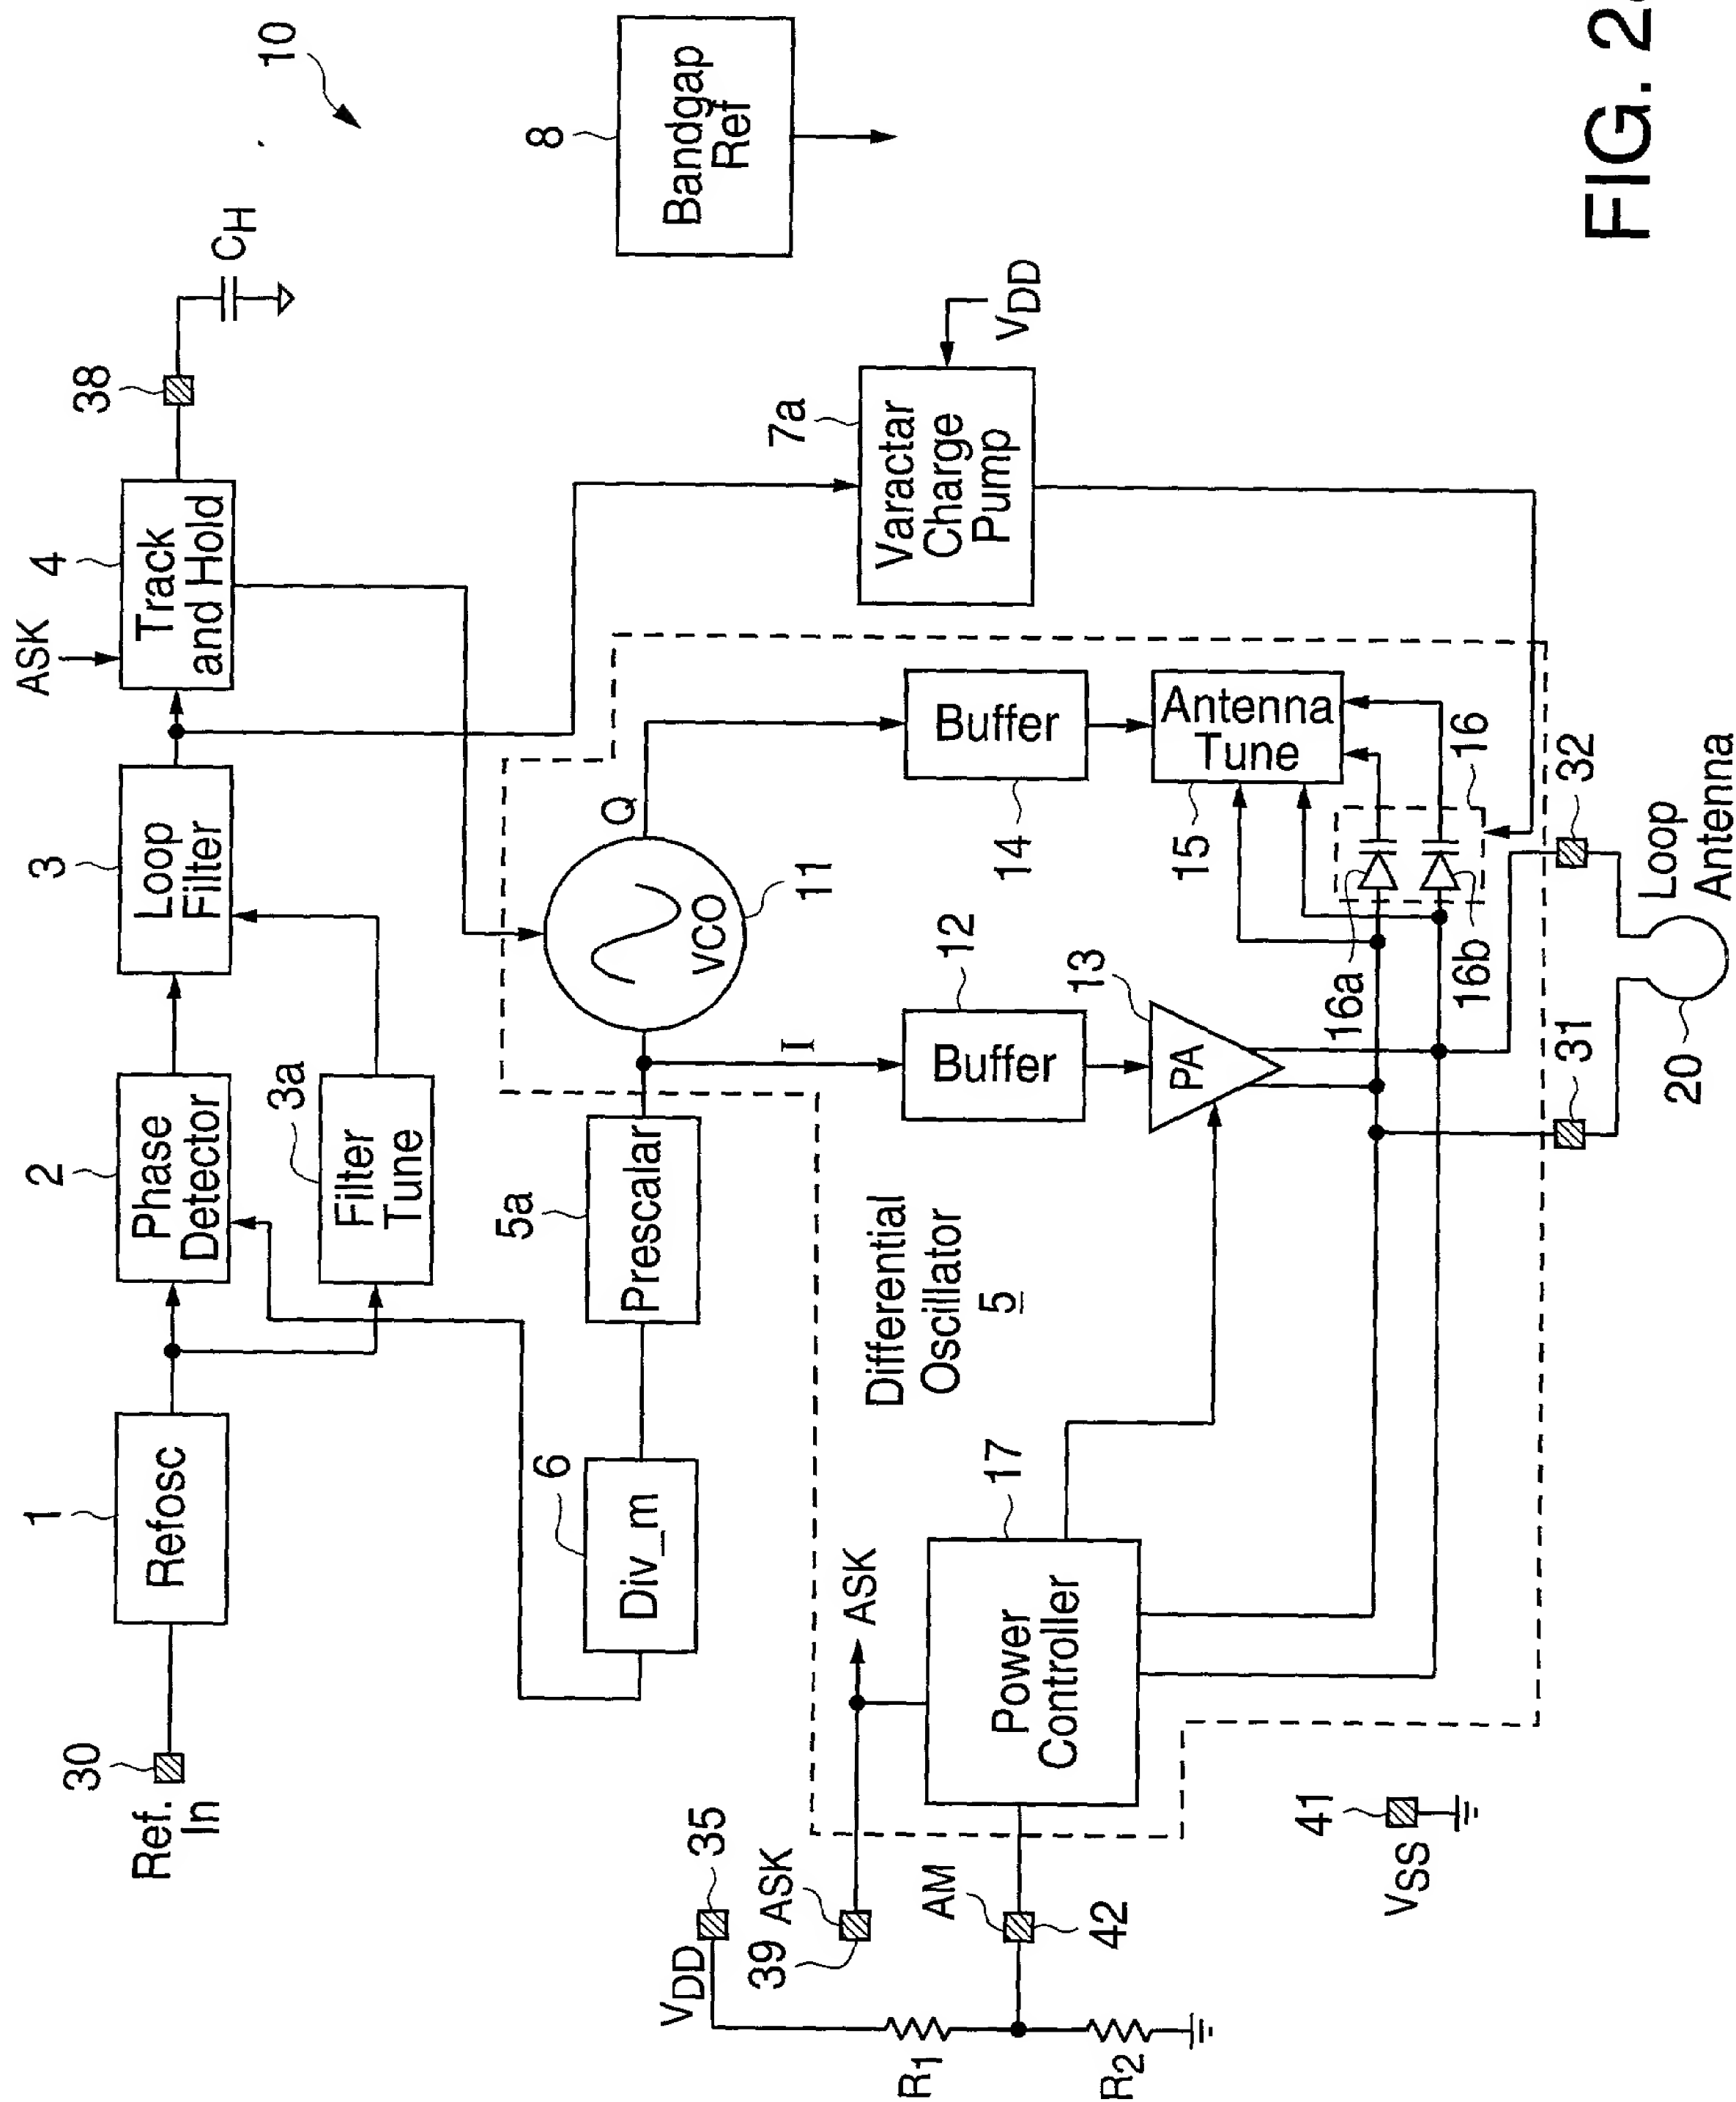


FIG. 2a

CONNECTION PIN DIAGRAM FOR THE INVENTION
FULLY INTEGRATED, ALL CMOS ASK/AM TRANSMITTER WITH AUTOMATIC ANTENNA TUNING

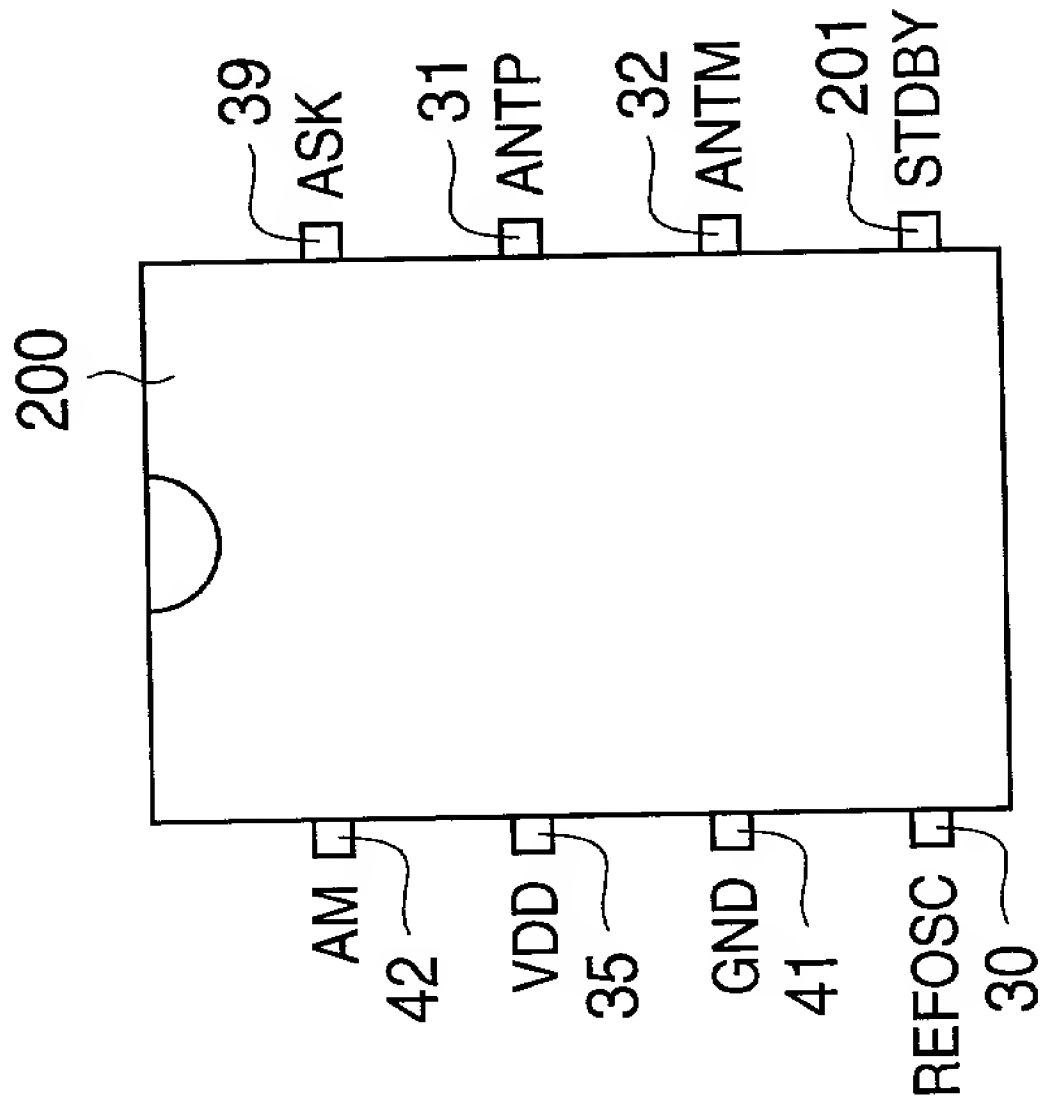
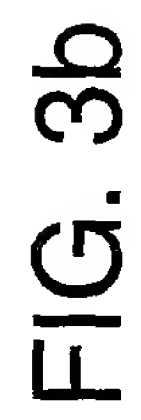
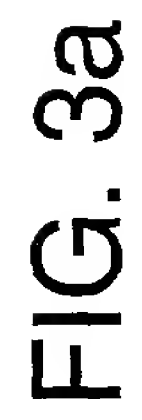


FIG. 2b



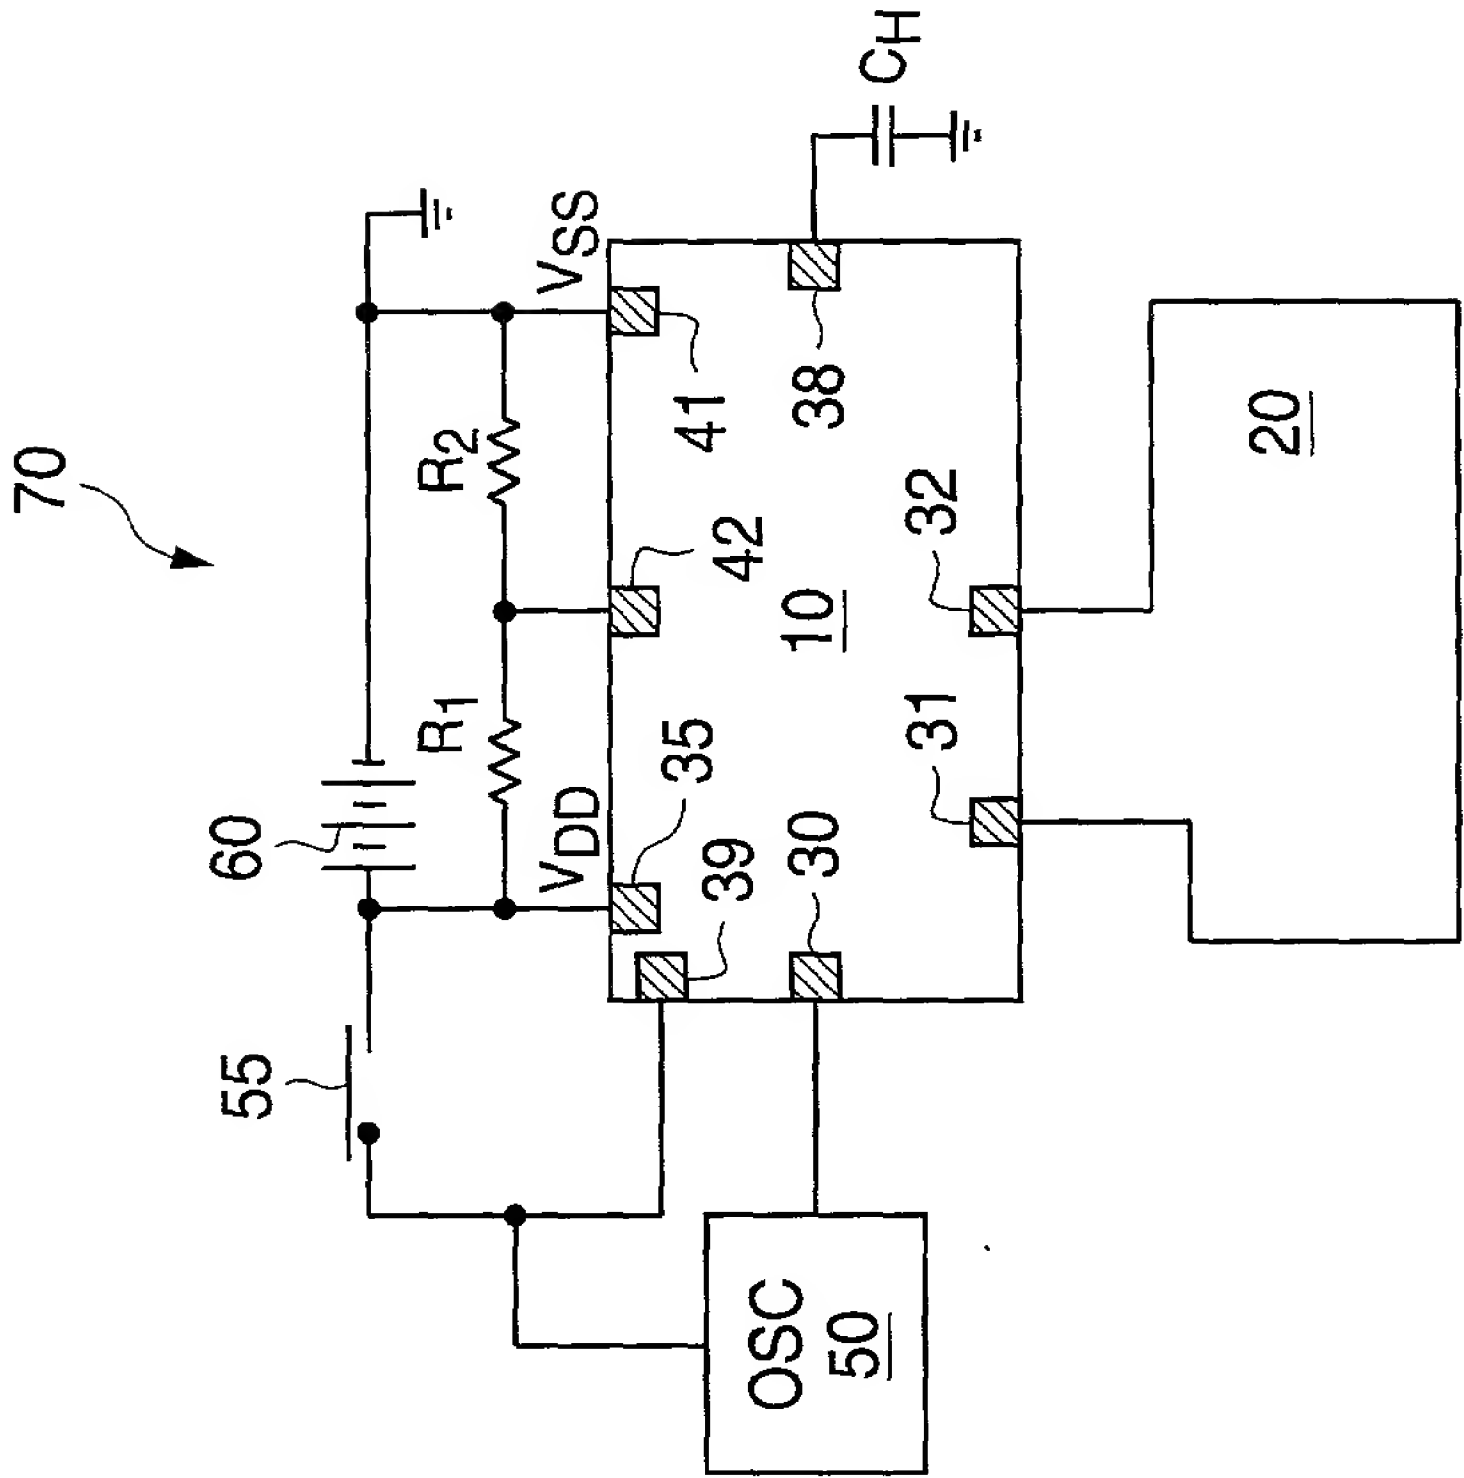


FIG. 4

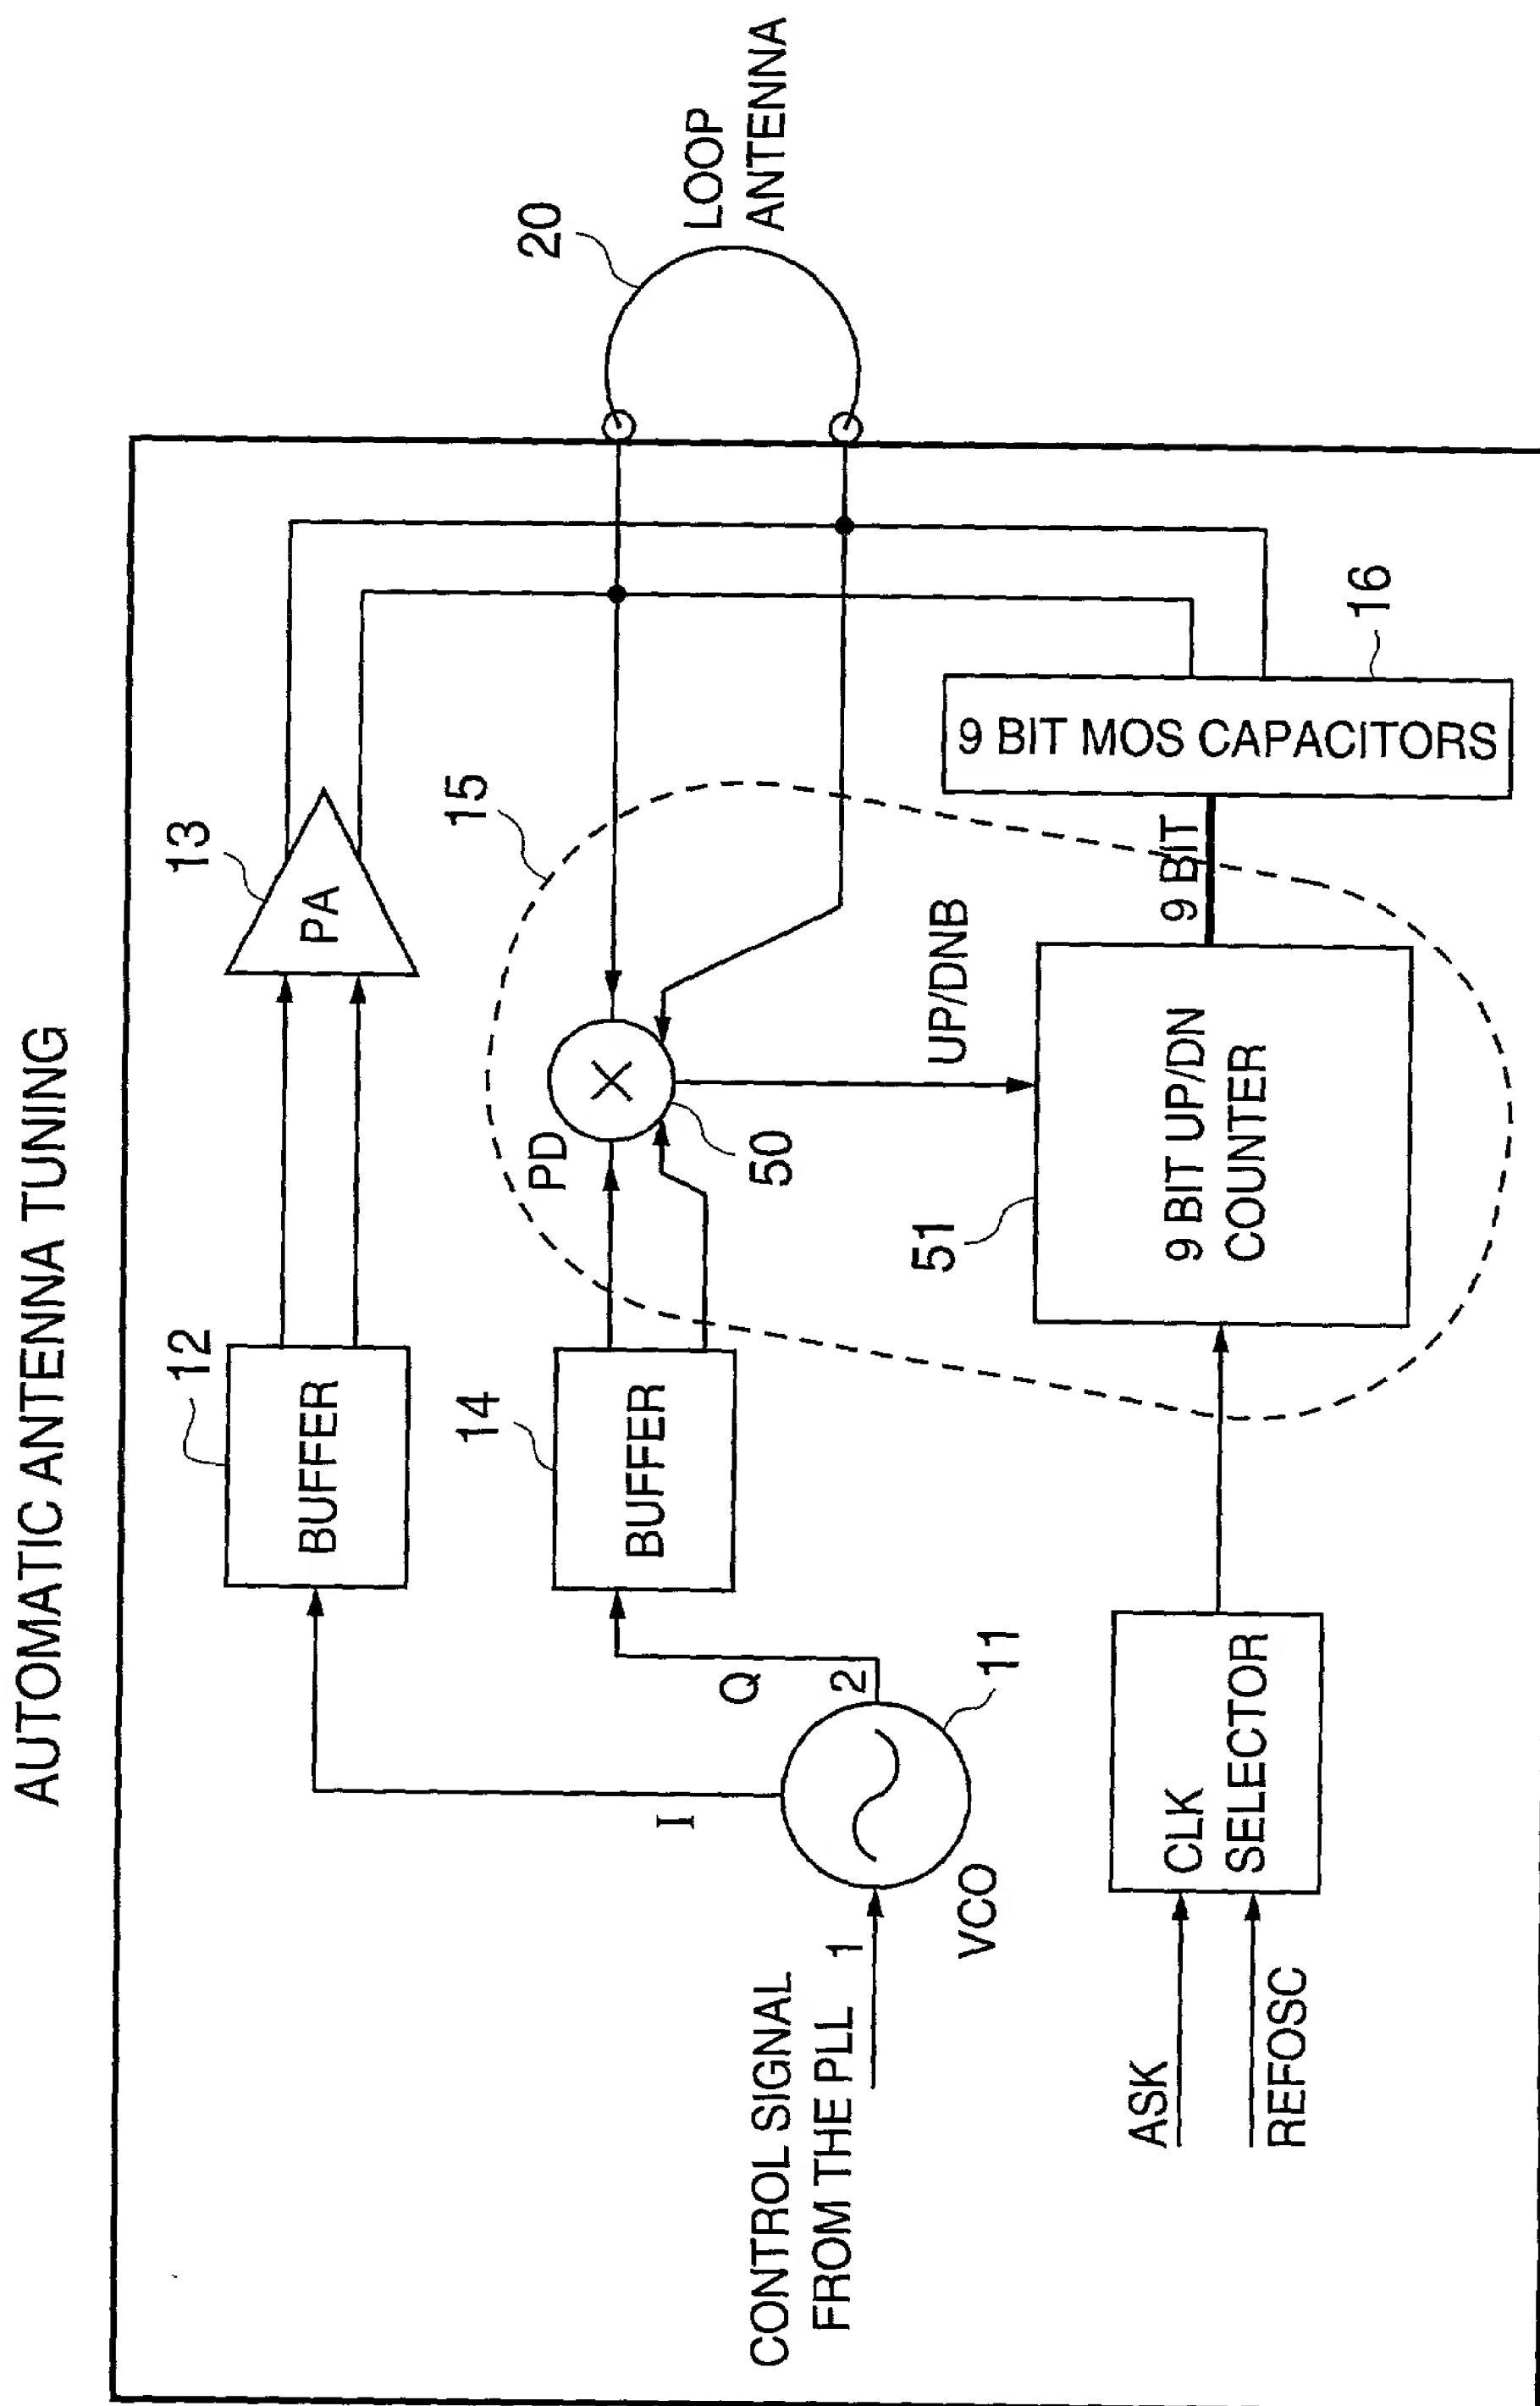
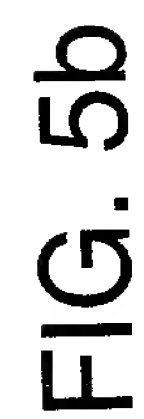
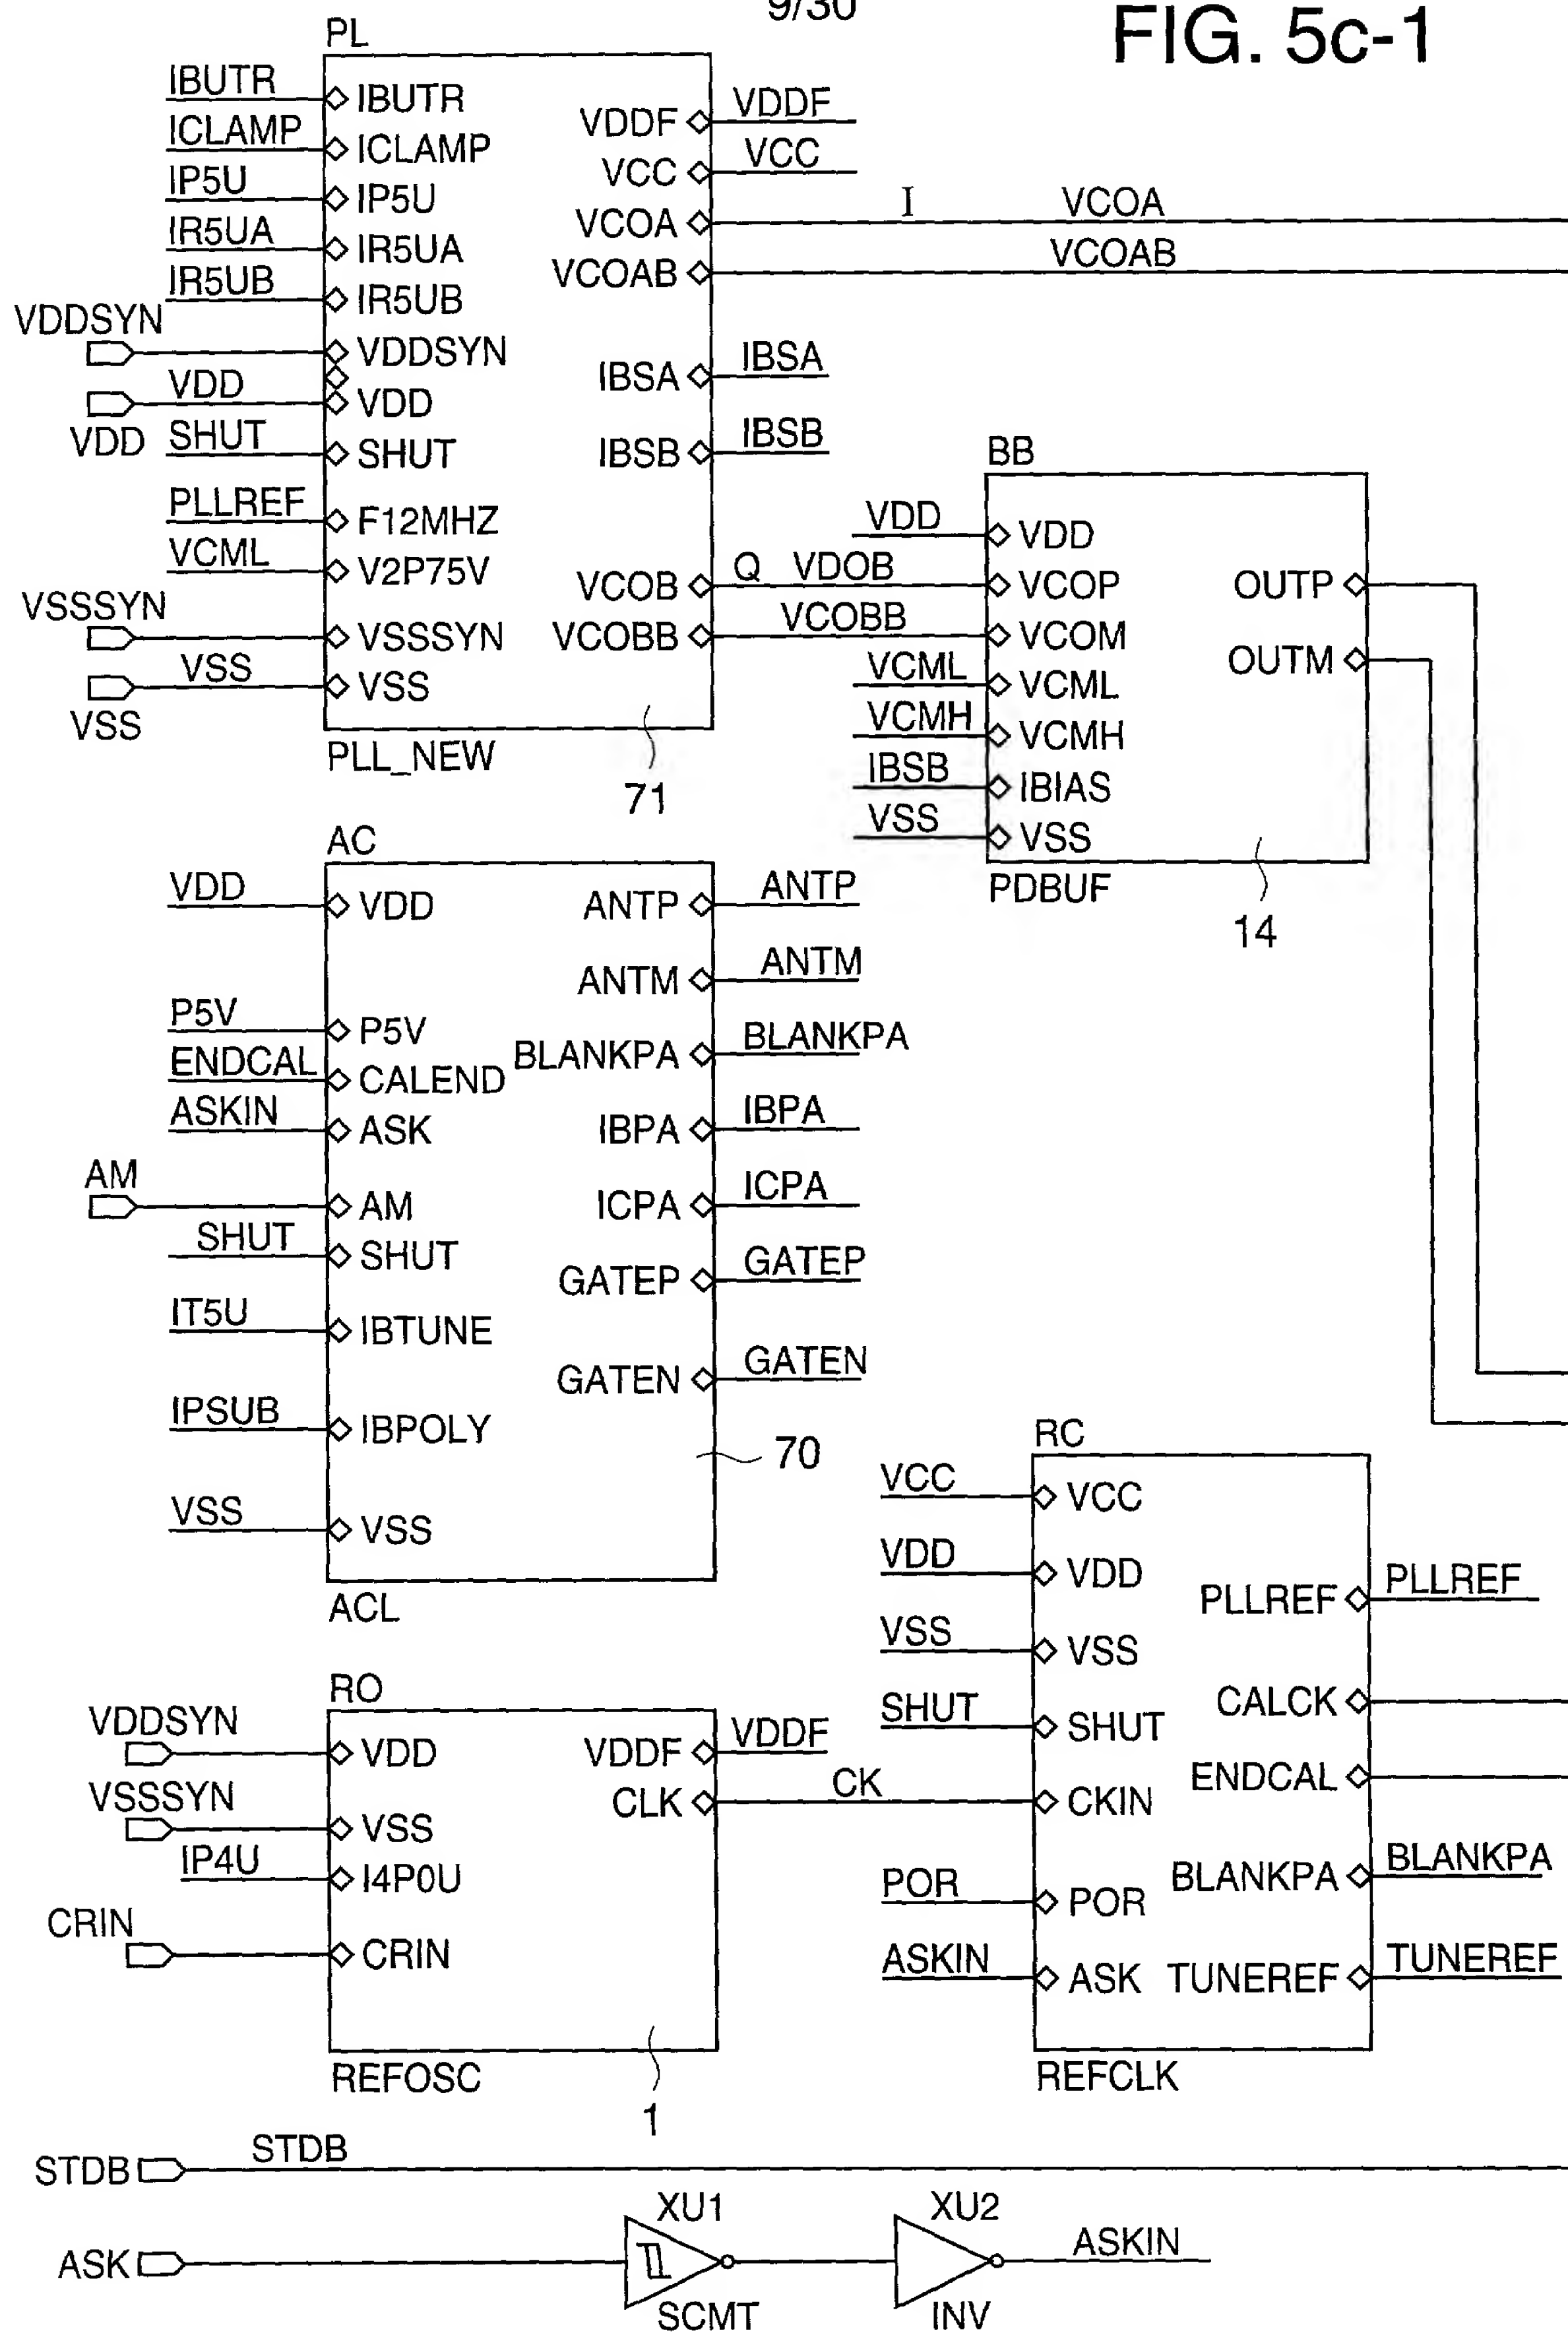


FIG. 5a





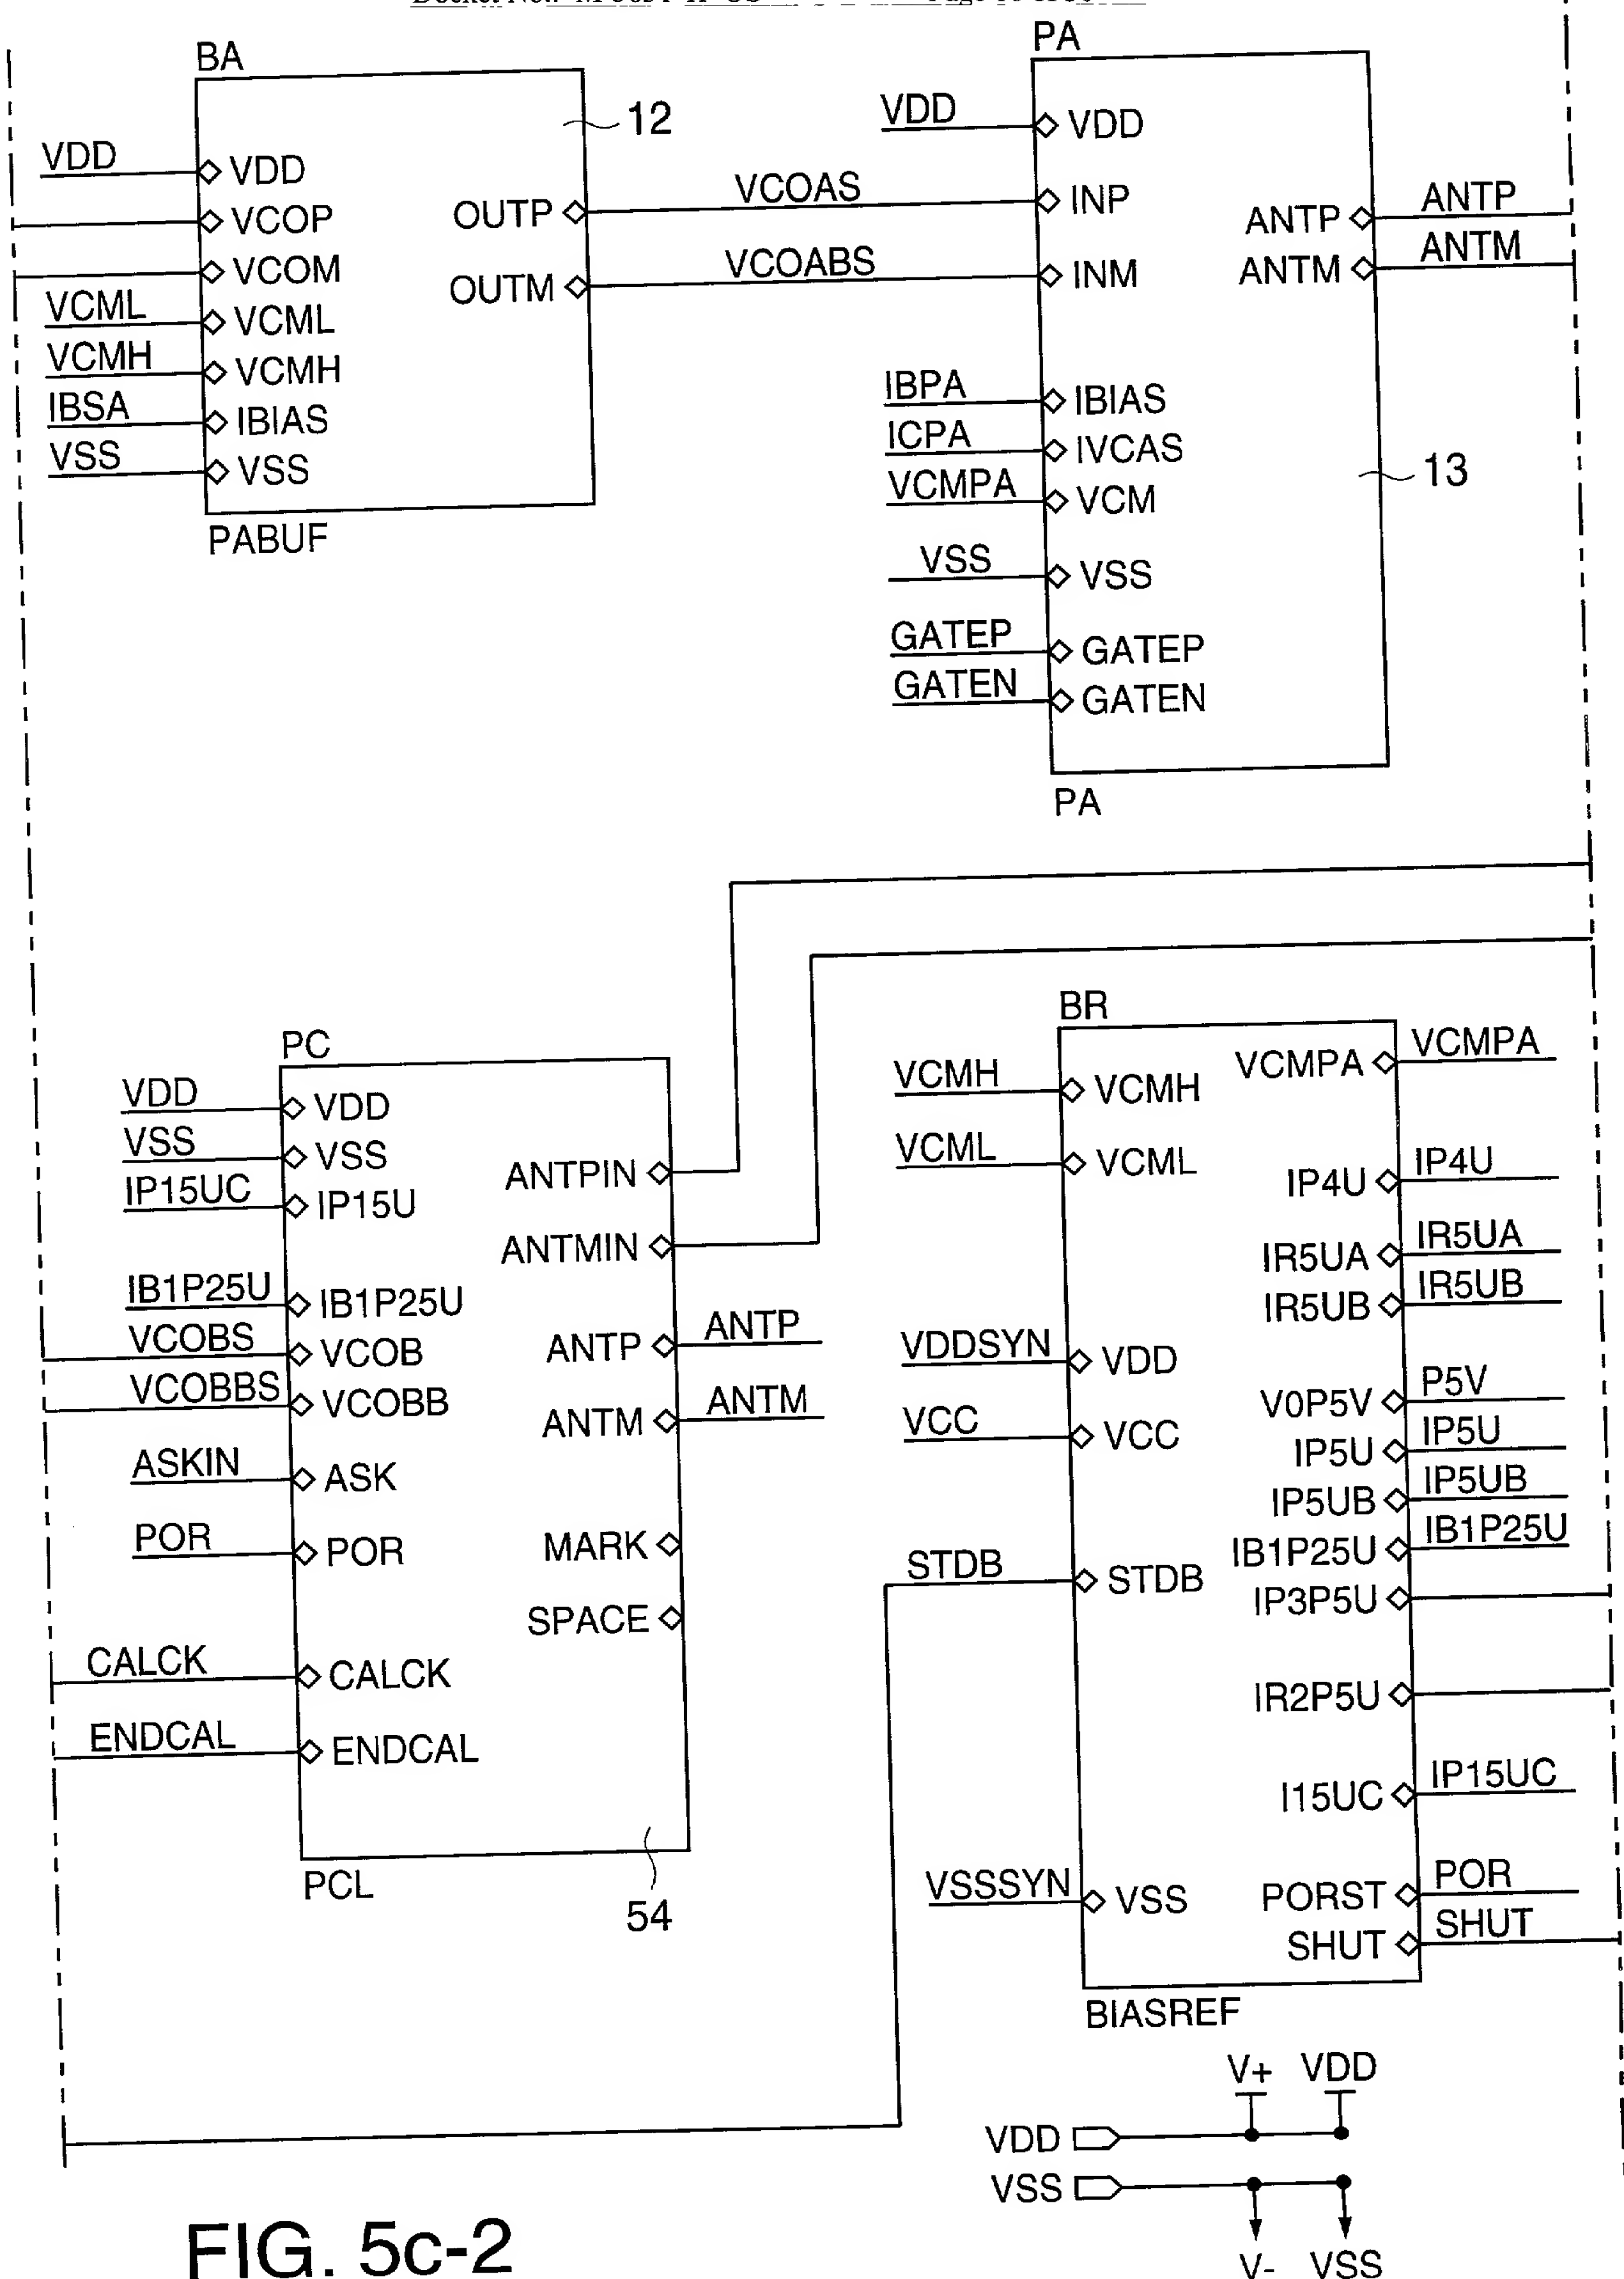


FIG. 5c-2


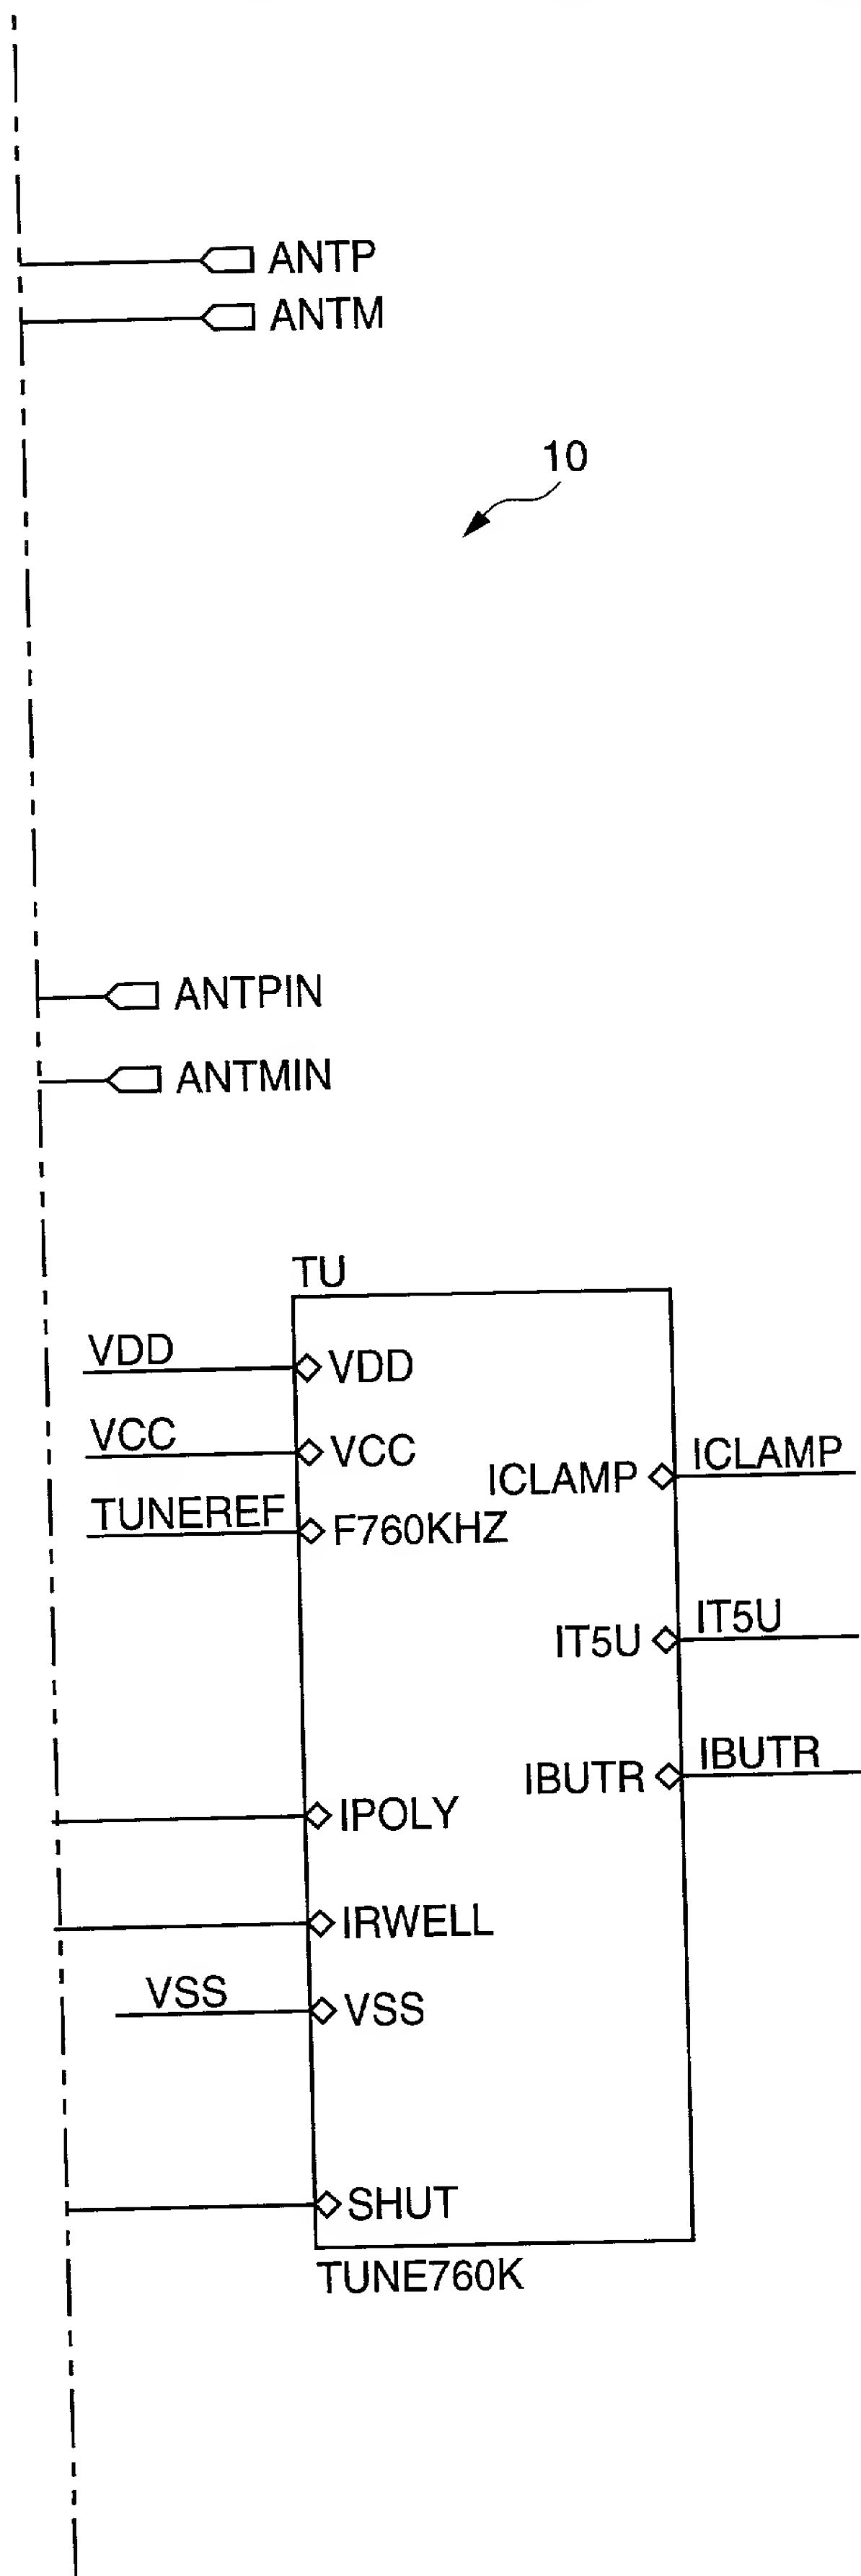


FIG. 5c-3

FIG. 5c-1	FIG. 5c-2	FIG. 5c-3
-----------	-----------	-----------

12/30


FIG. 5d-1

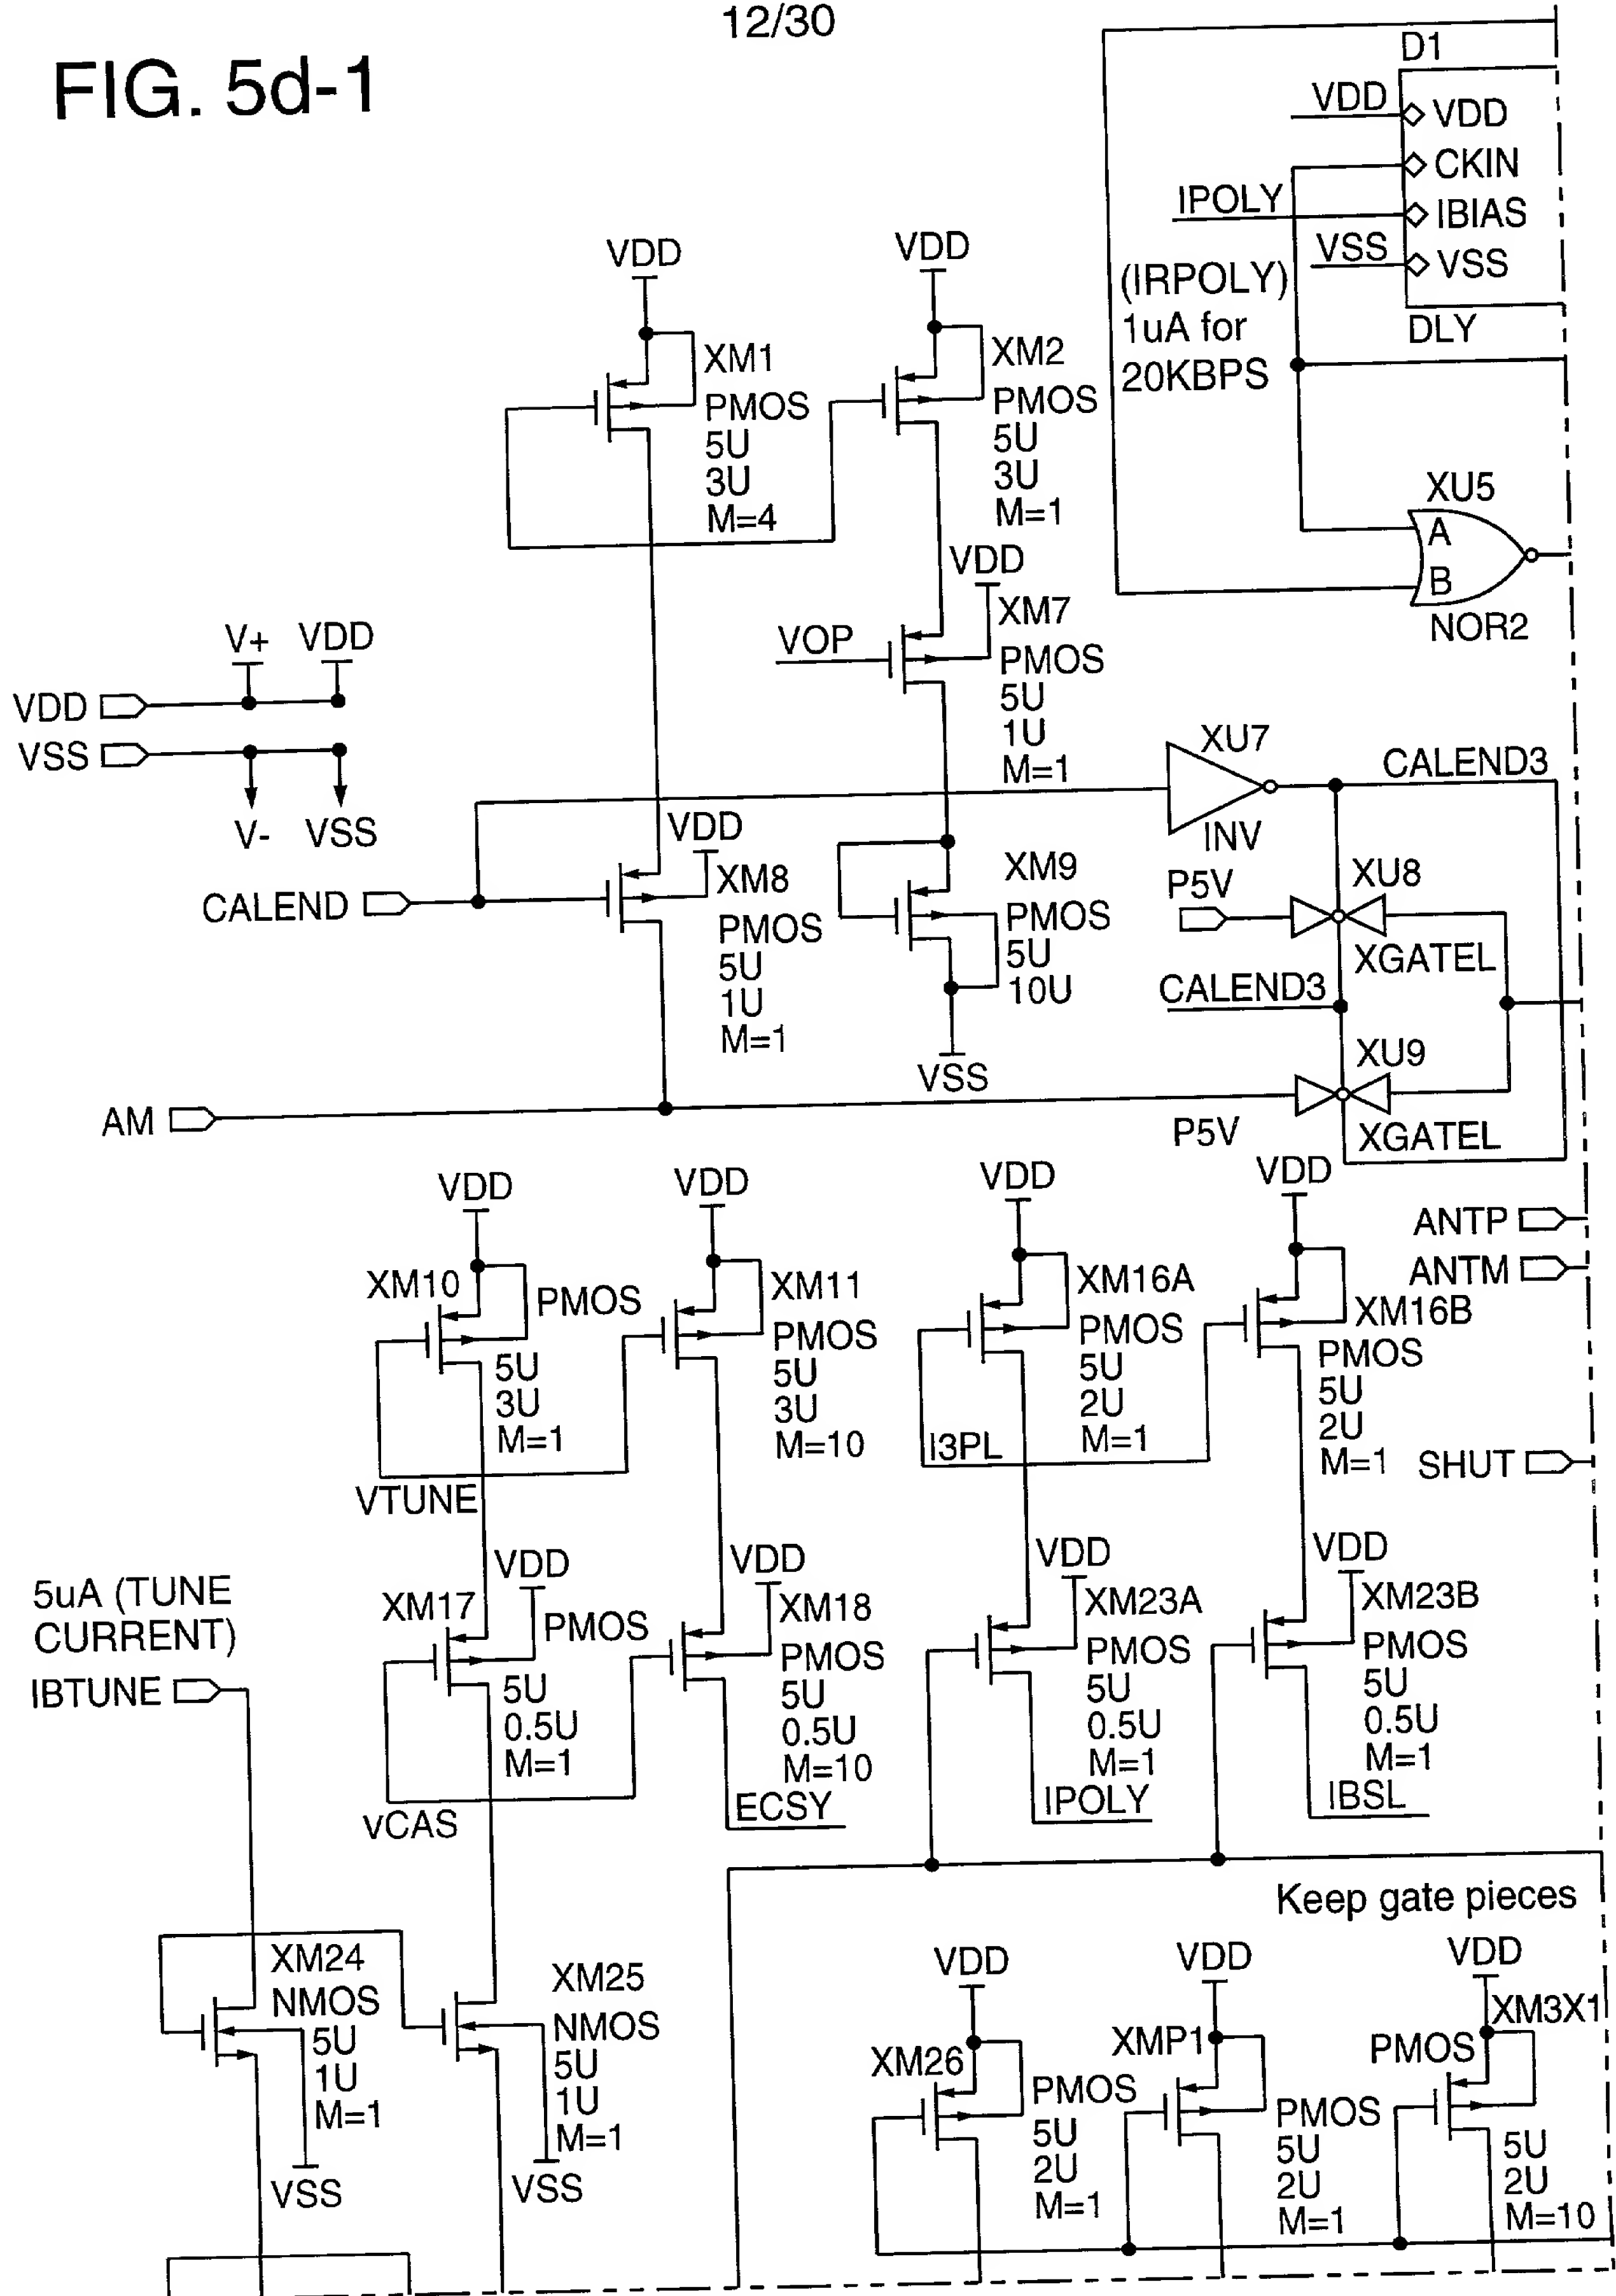

03375-08130


13/30

FIG. 5d-2

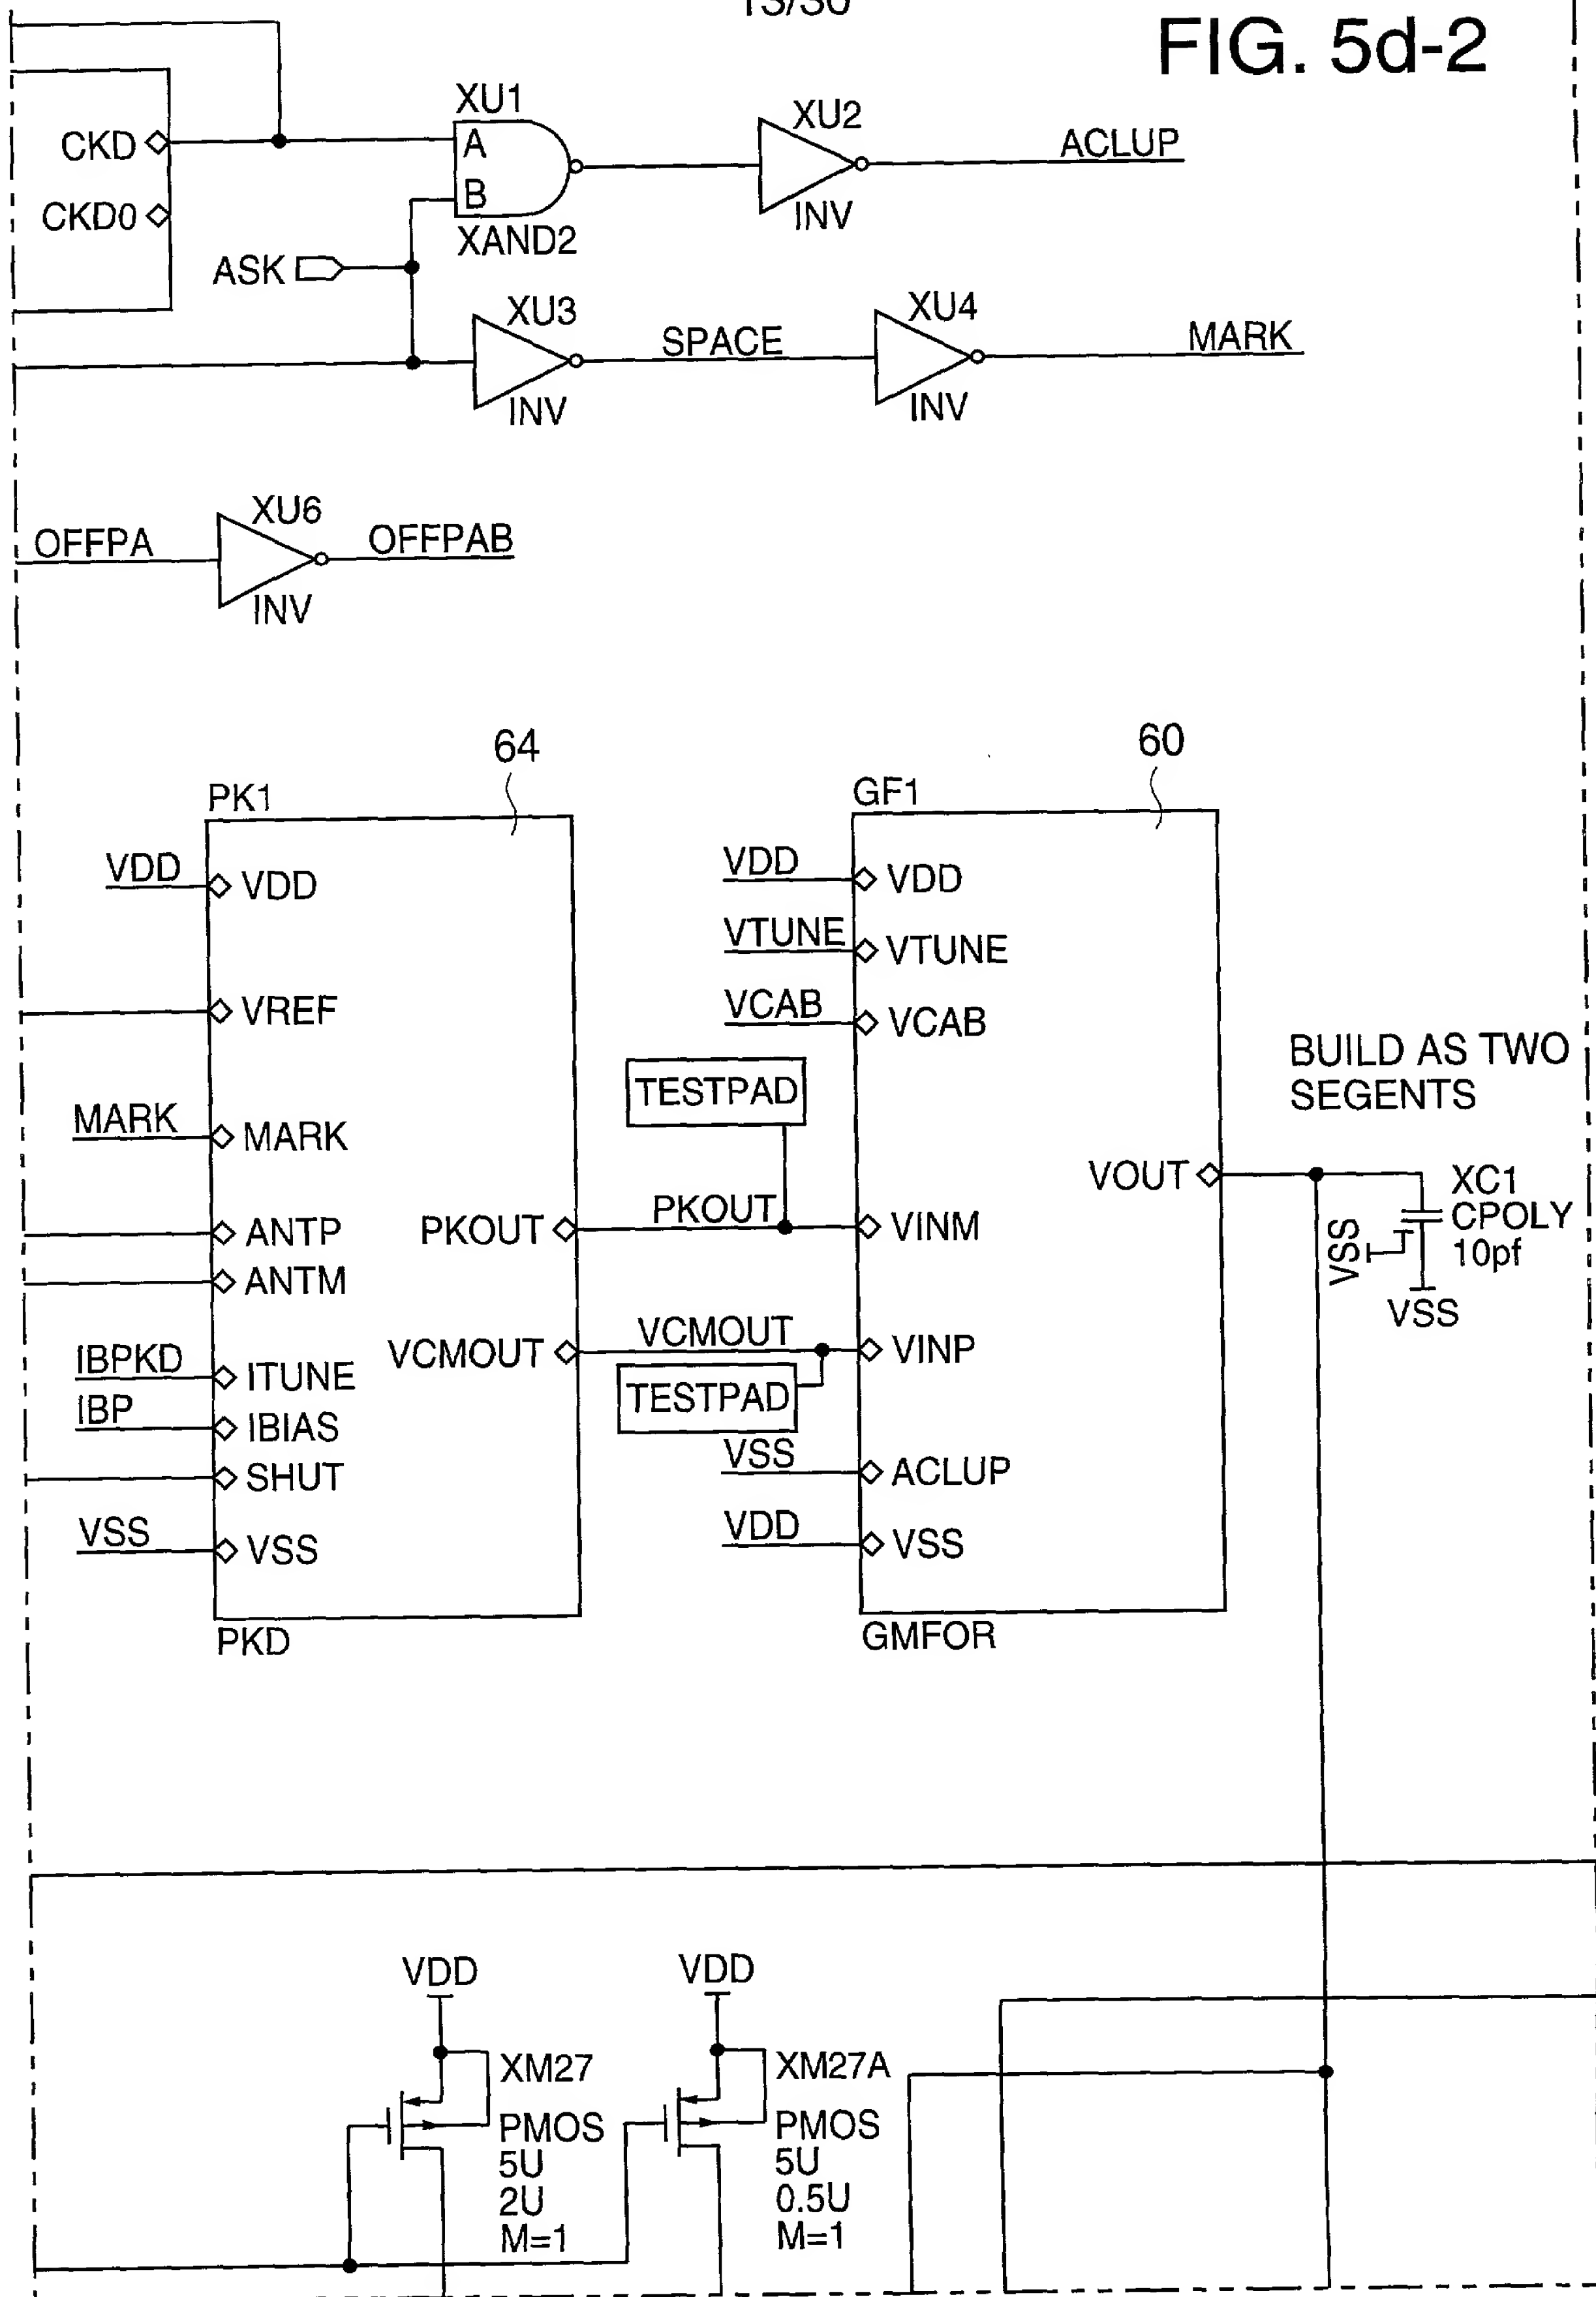

14/30

FIG. 5d-3

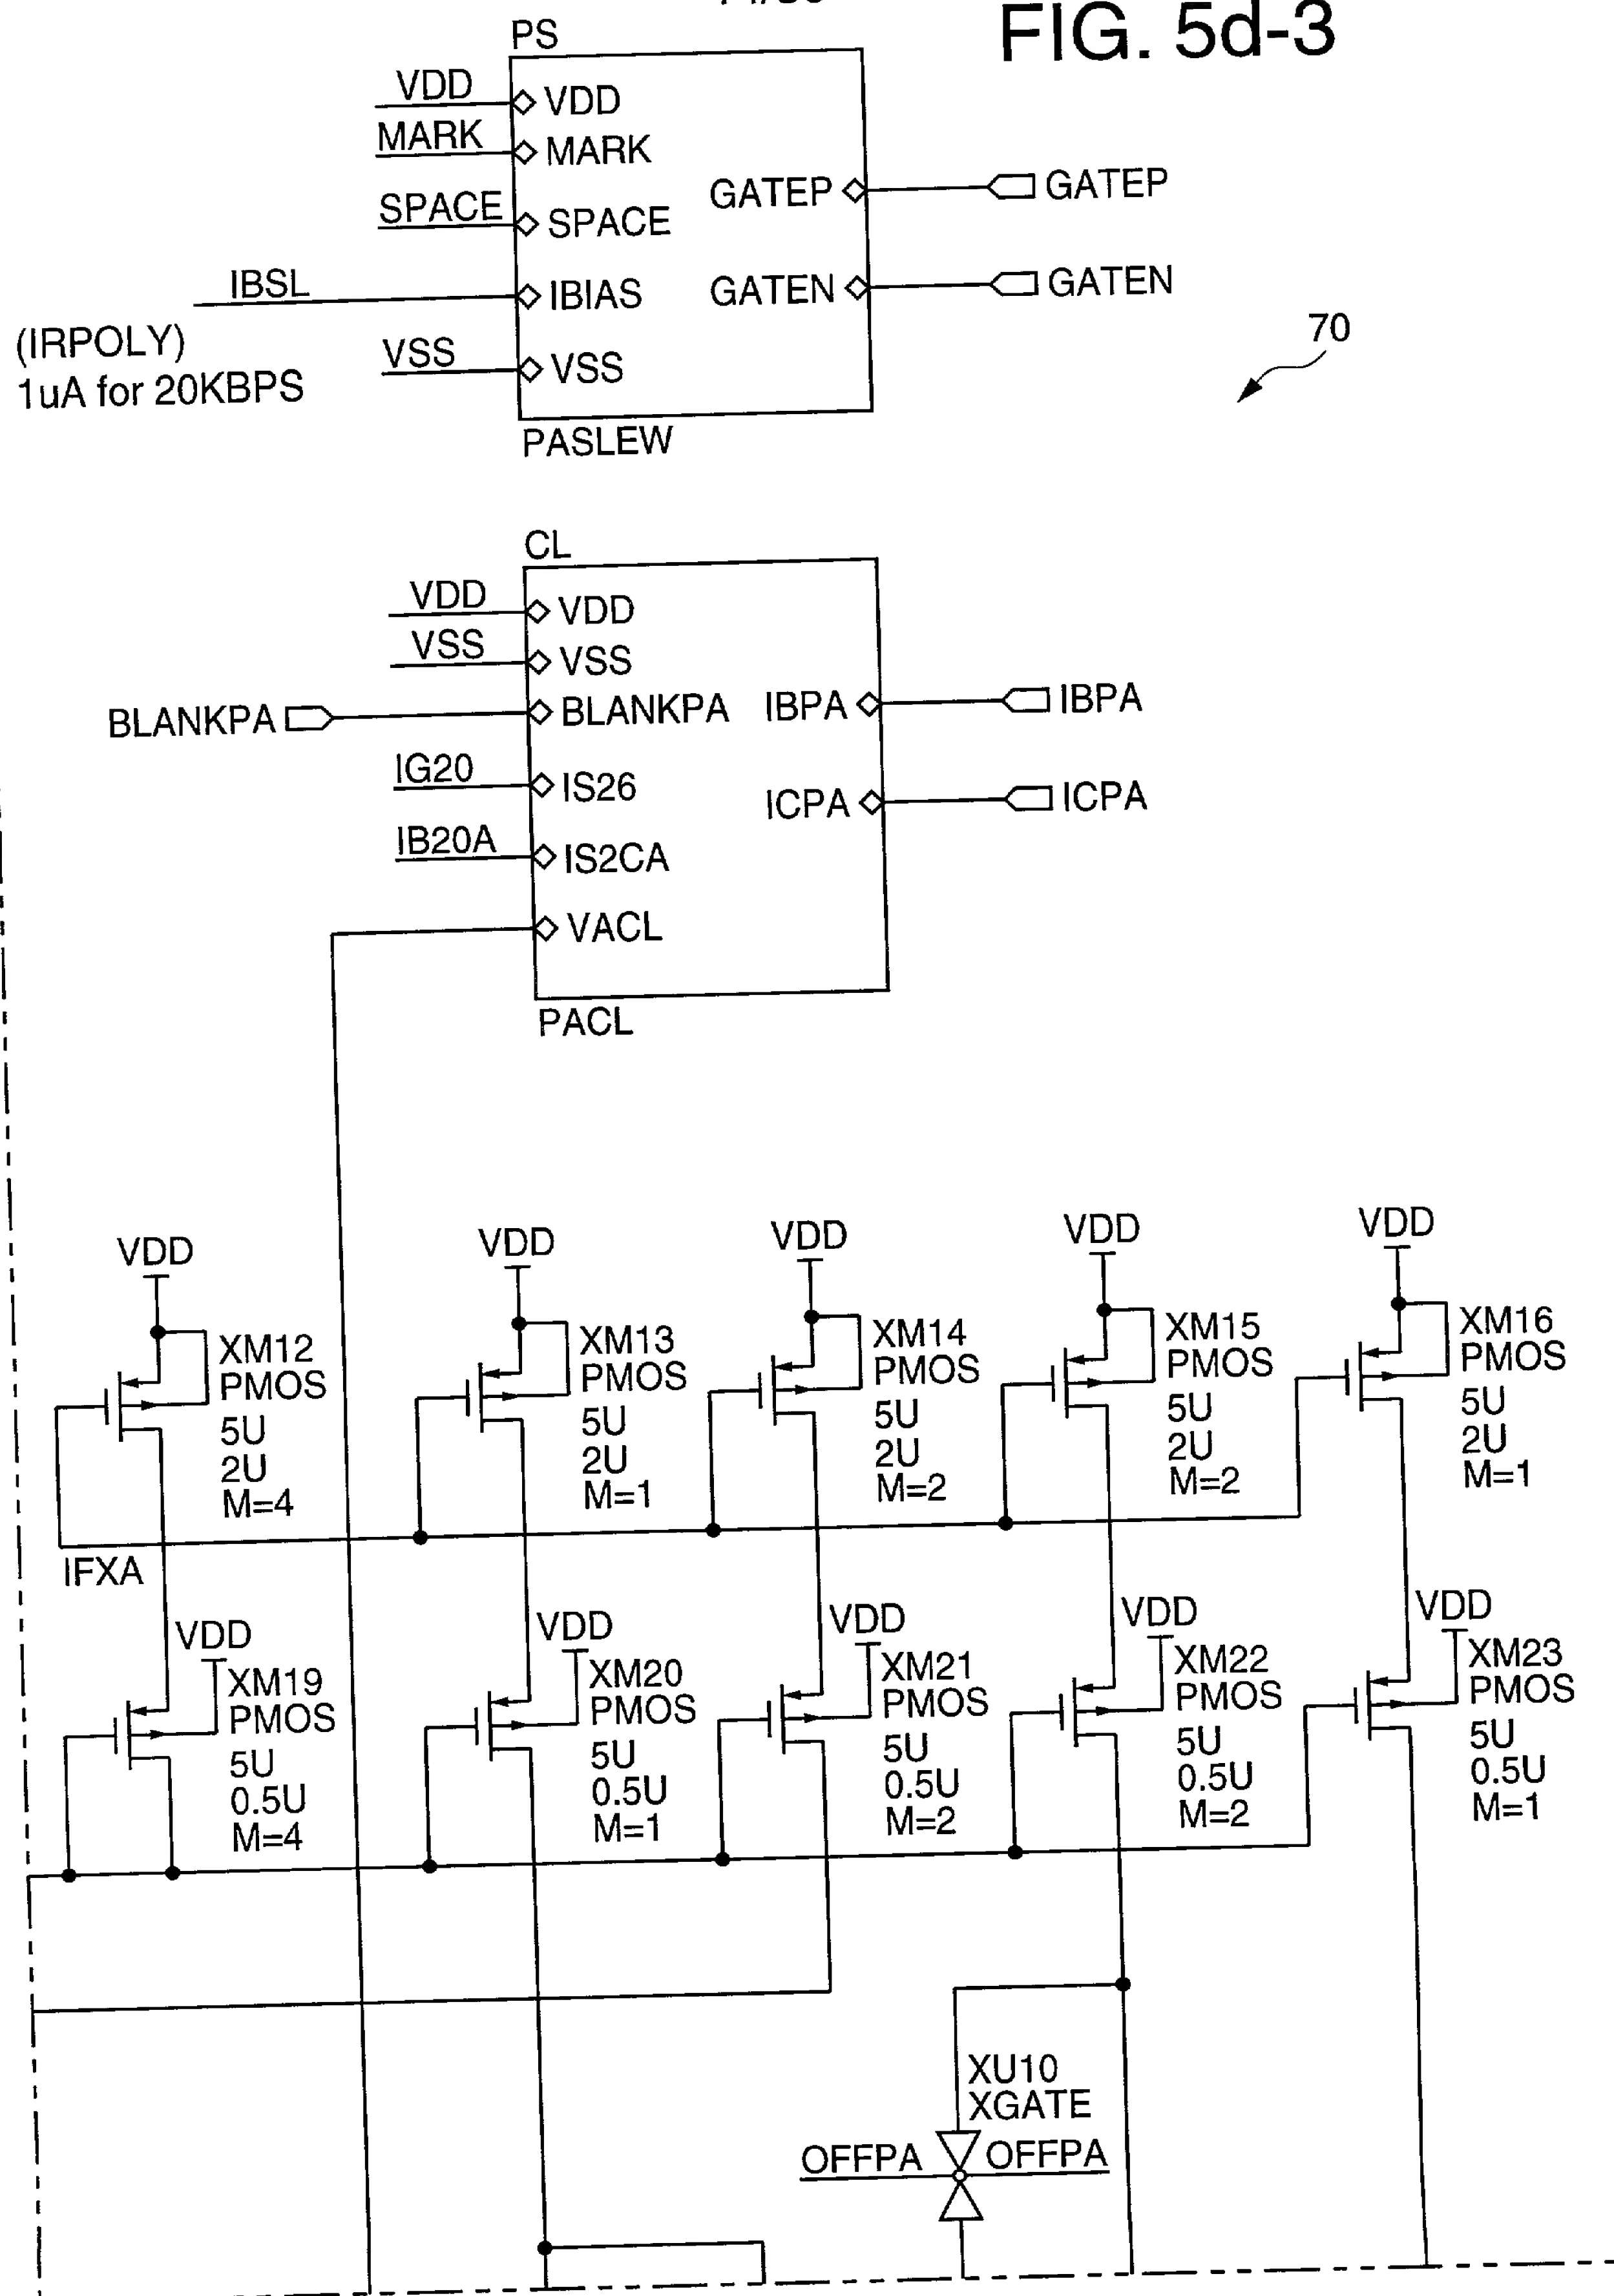

15/30

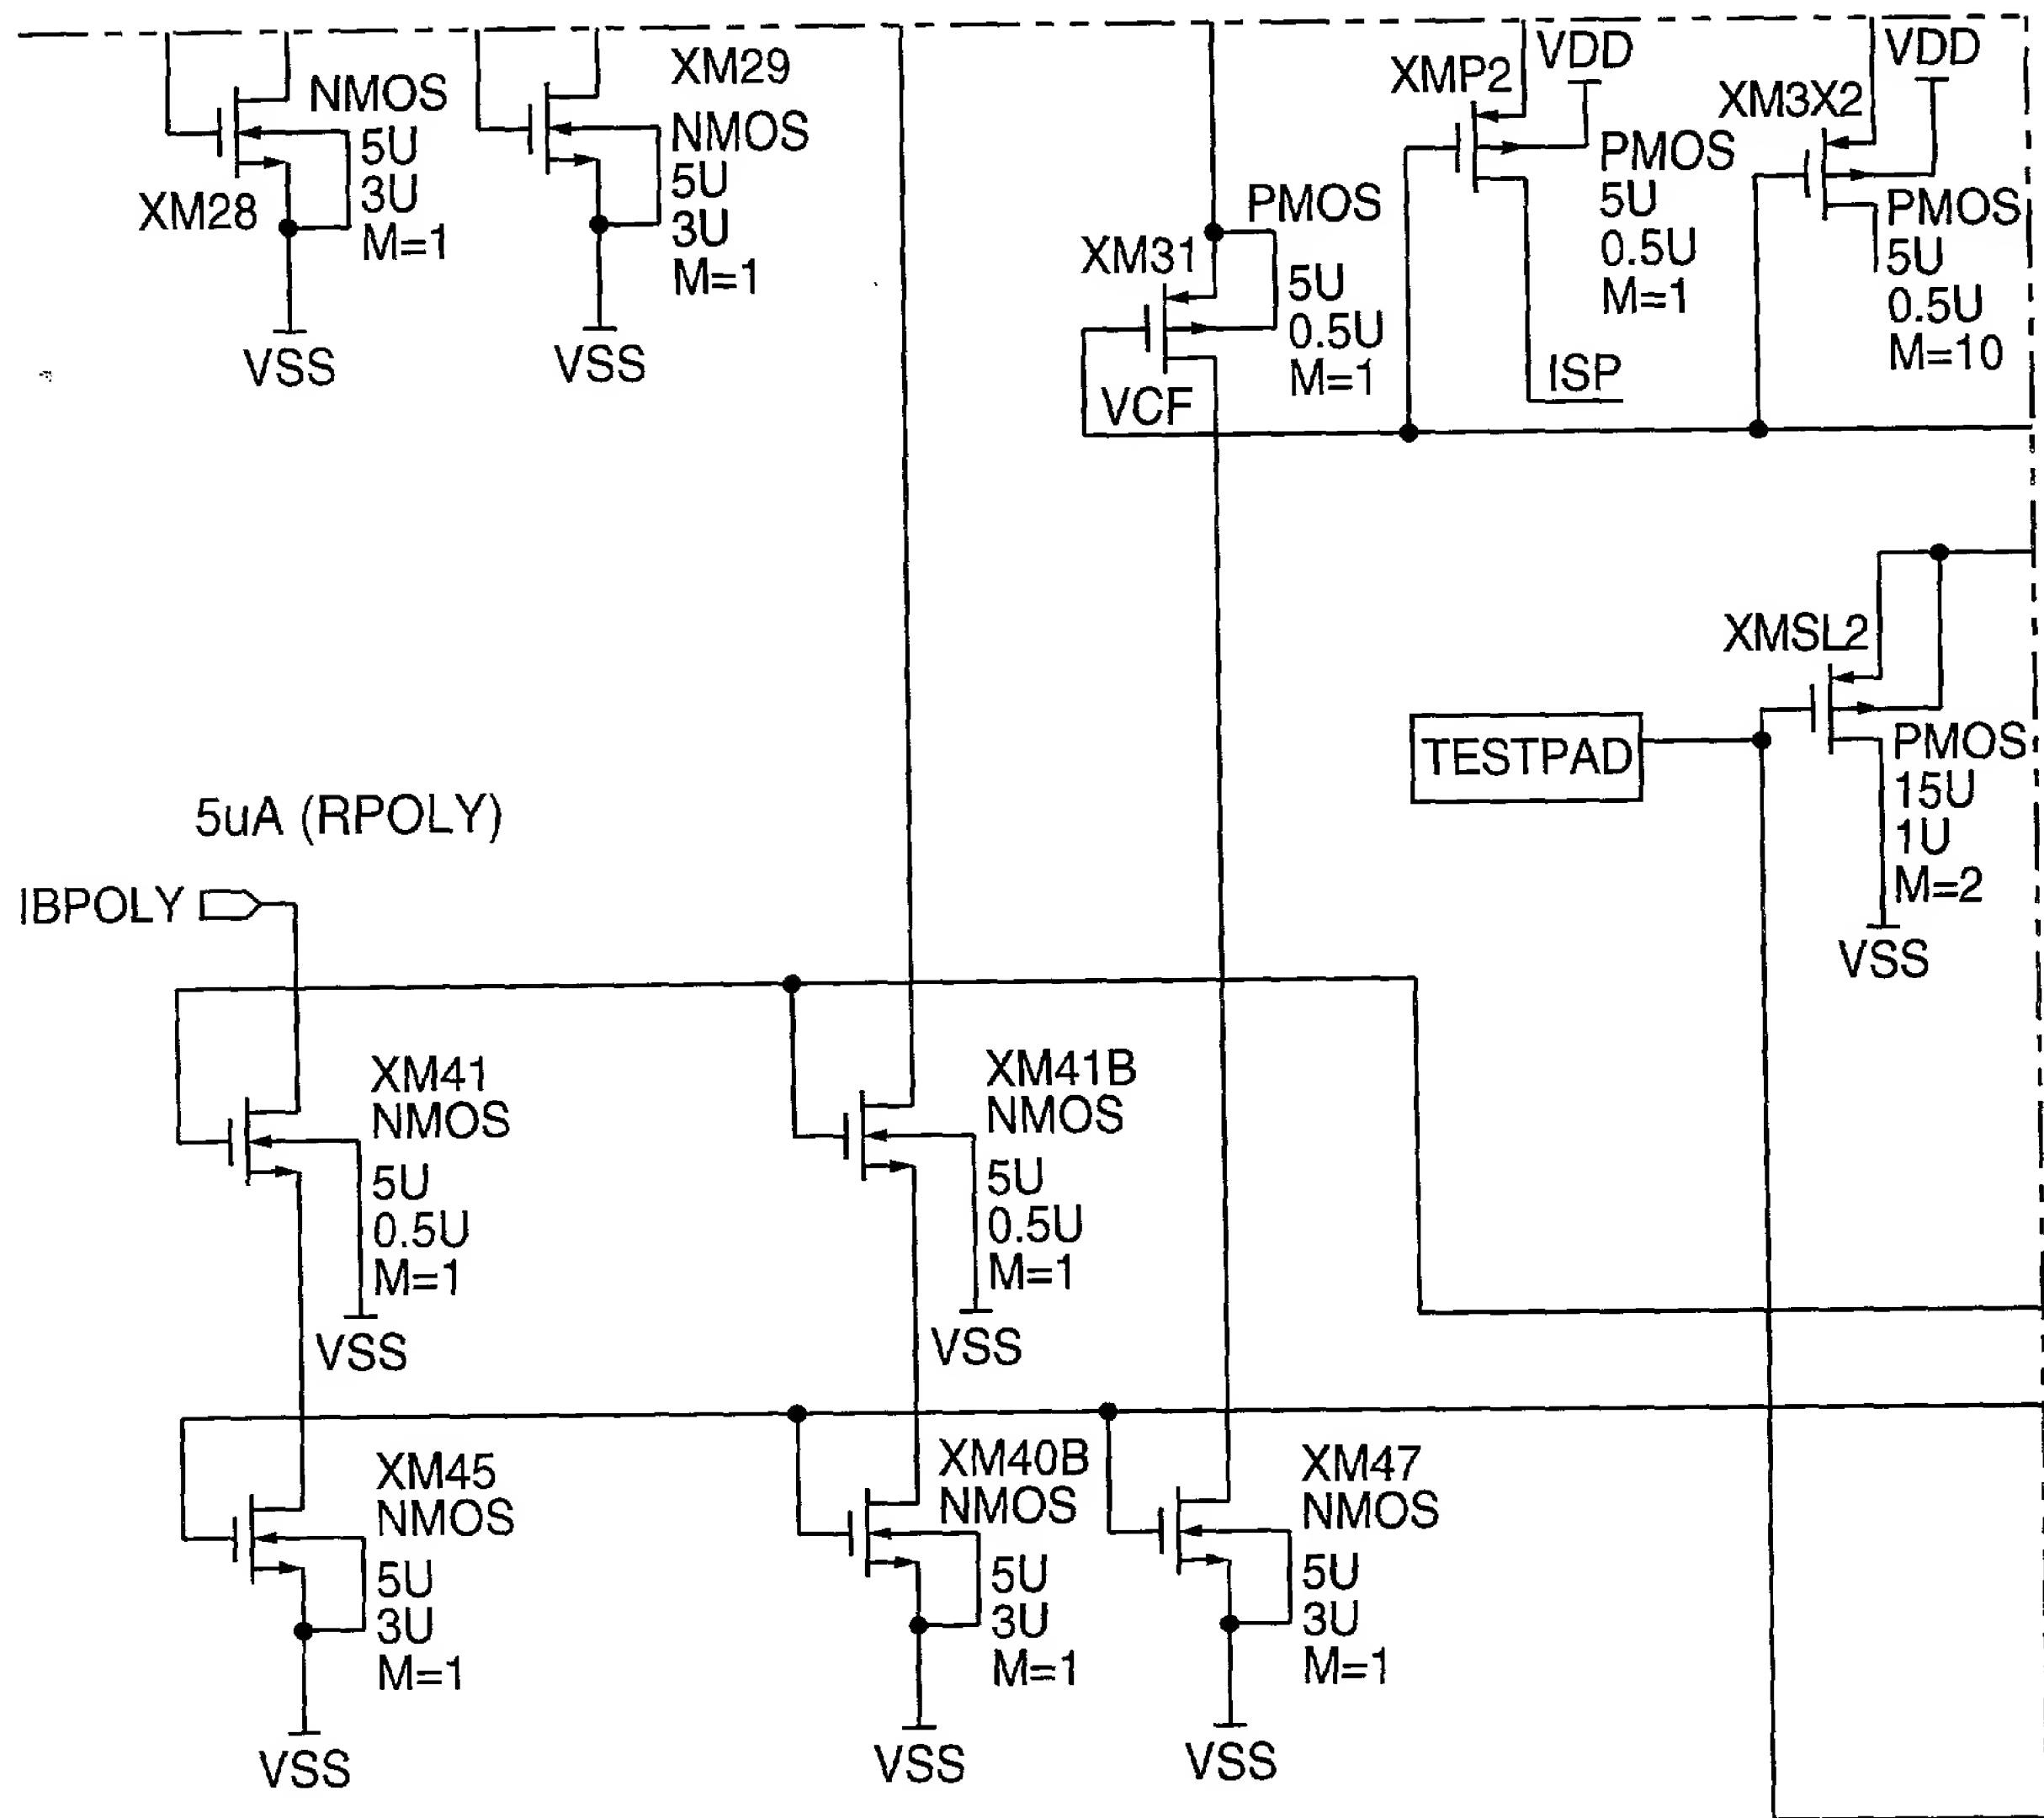


FIG. 5d-4

16/30

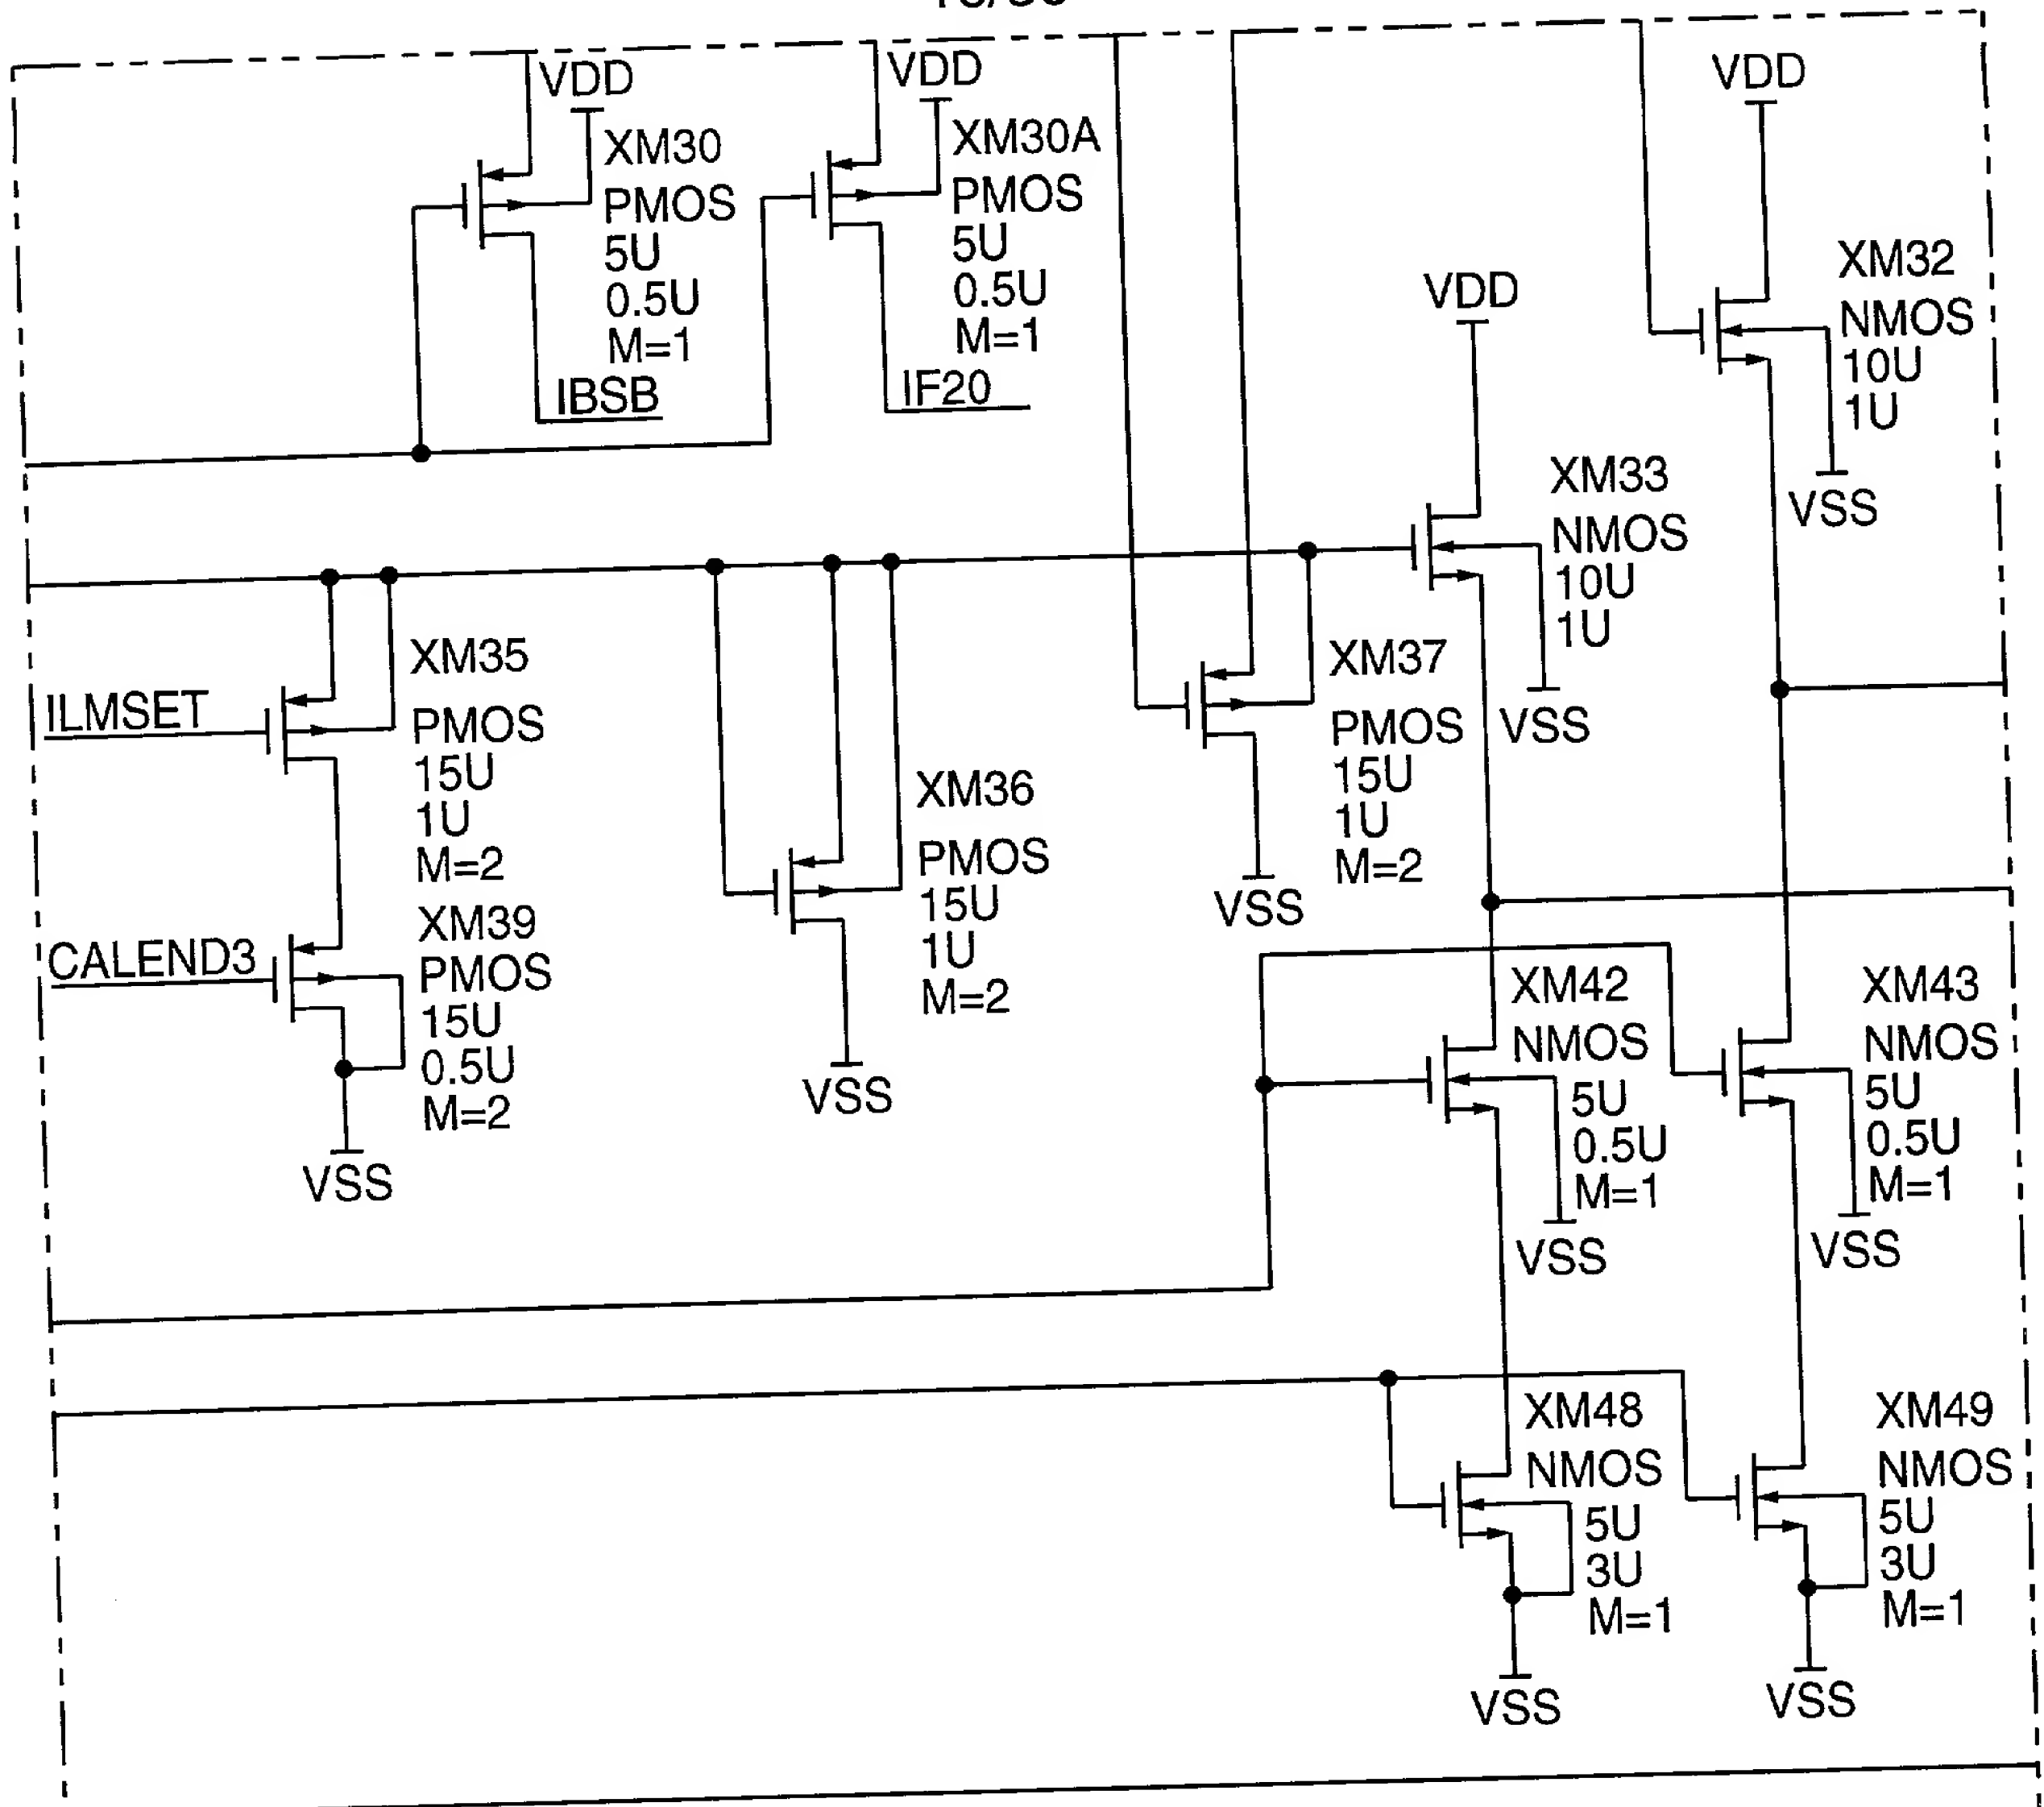


FIG. 5d-5

17/30

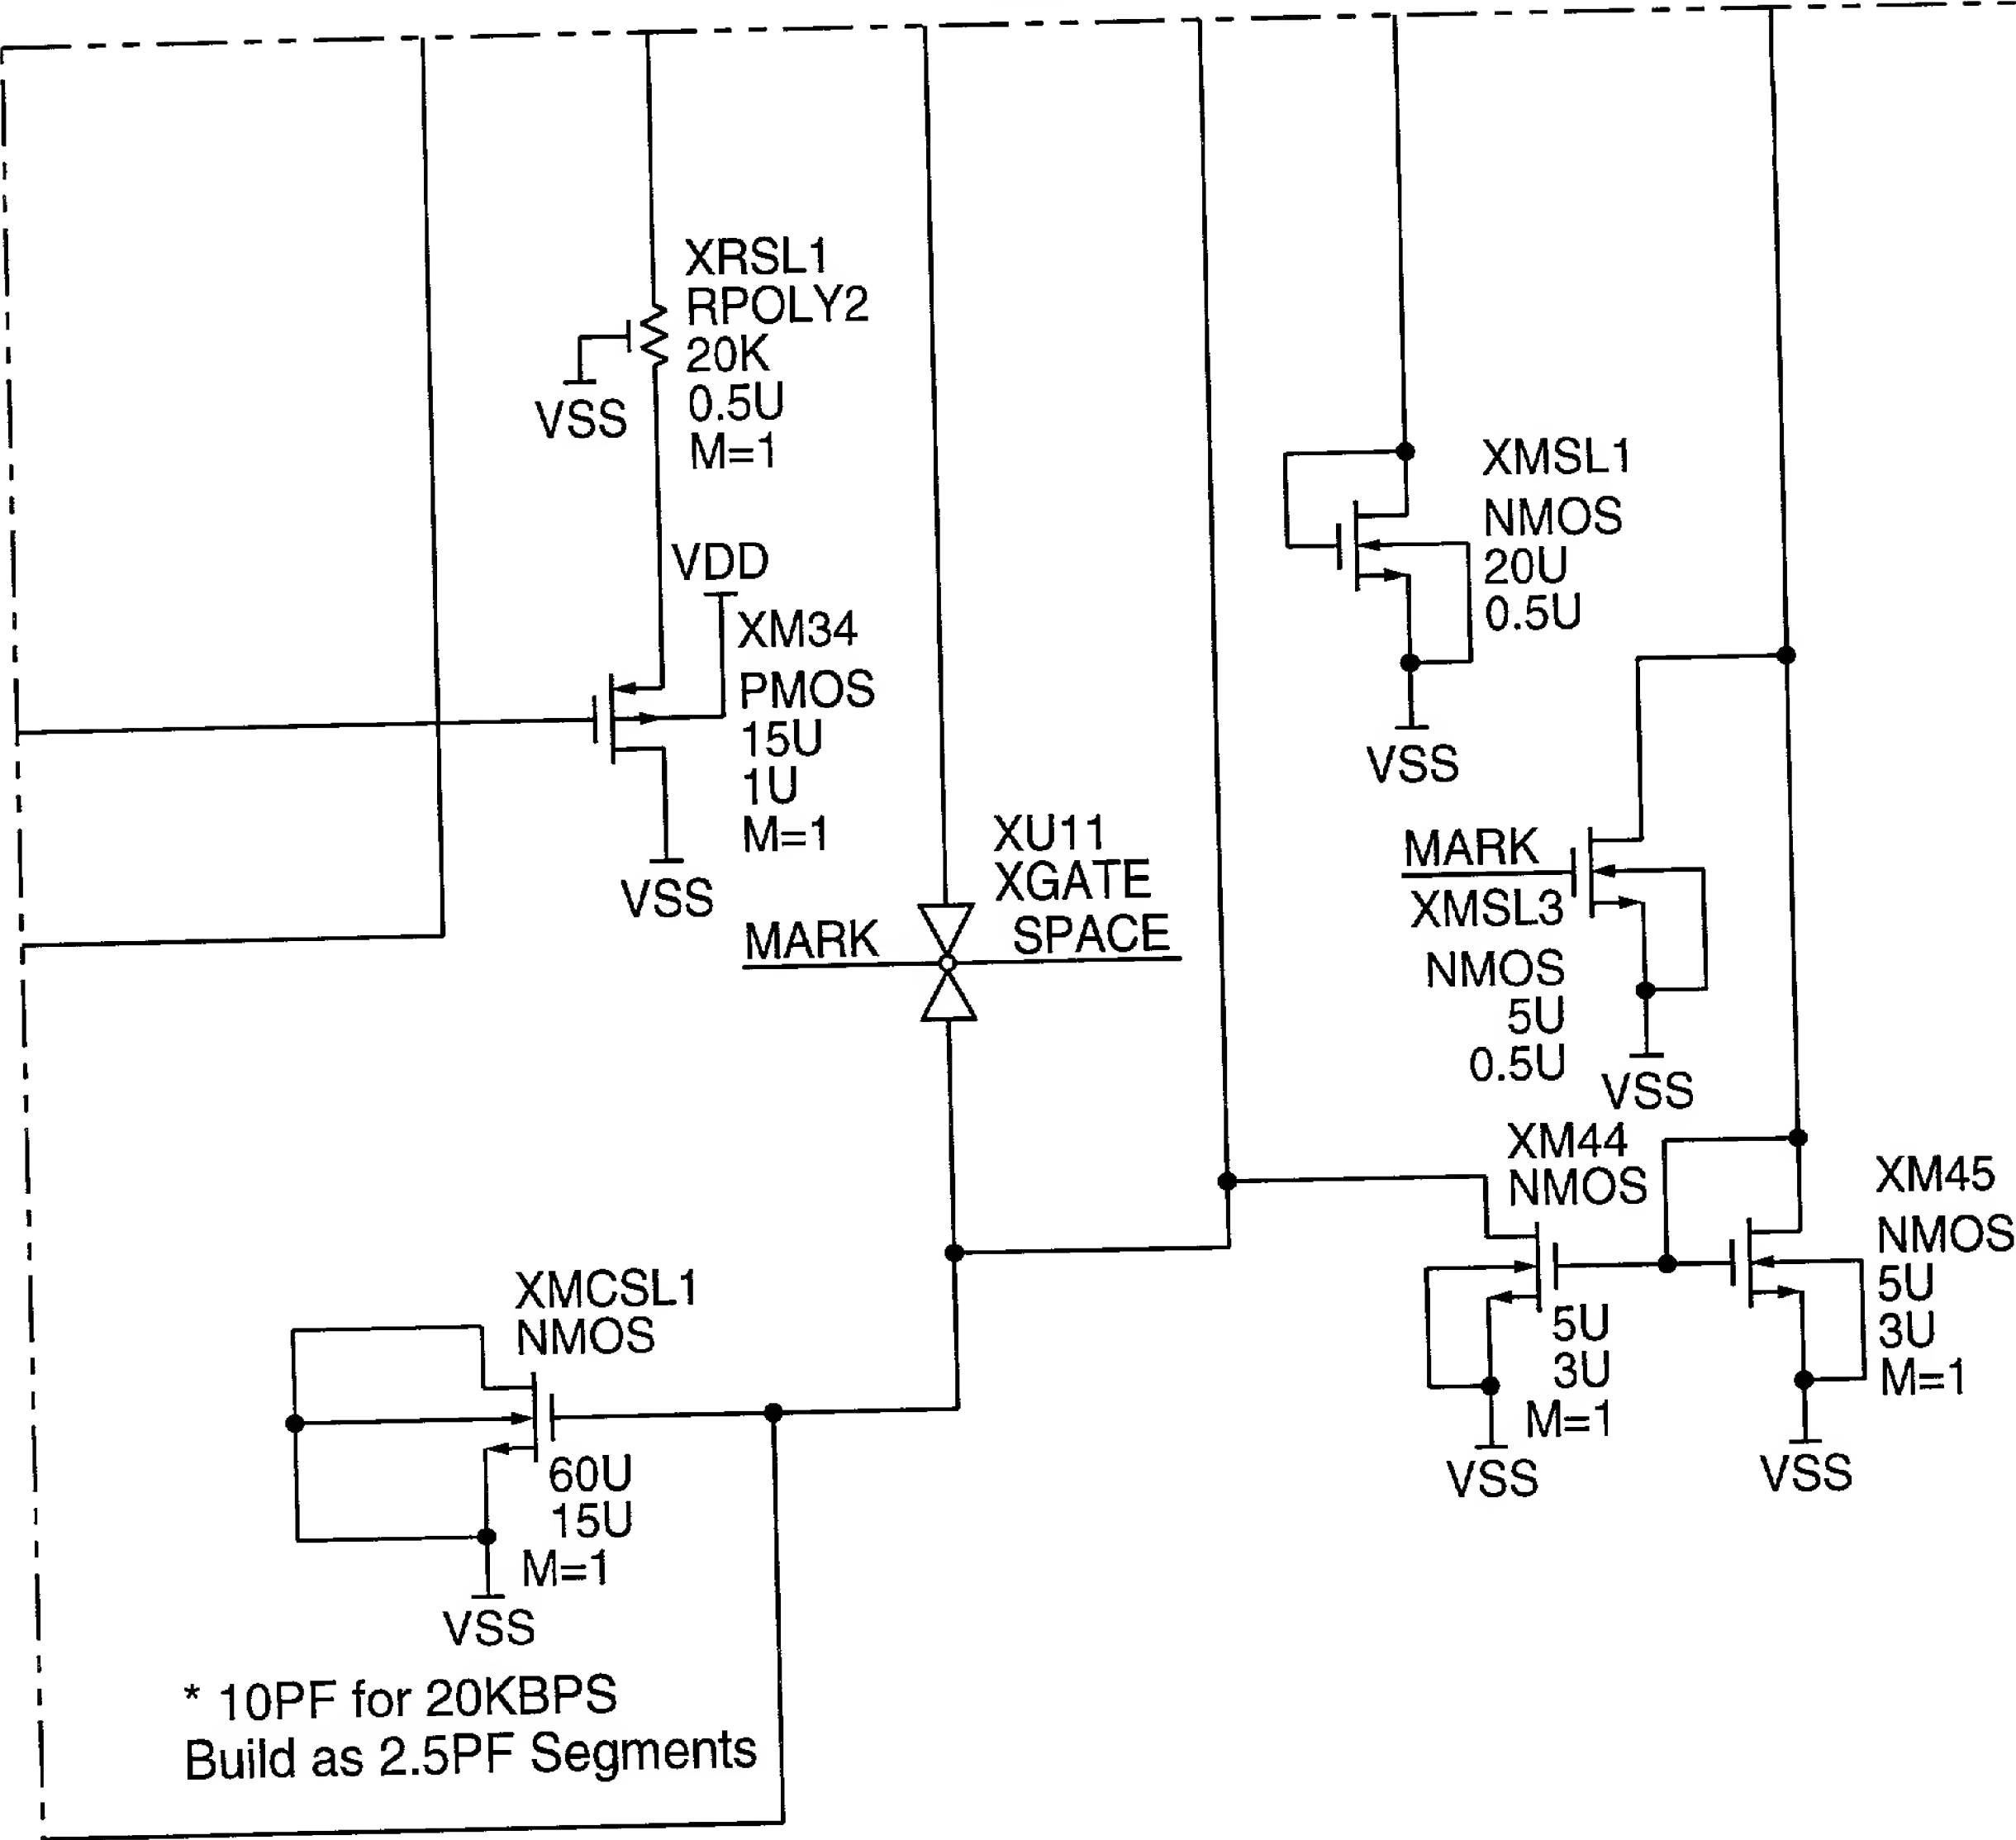


FIG. 5d-6

FIG. 5d-1	FIG. 5d-2	FIG. 5d-3
FIG. 5d-4	FIG. 5d-5	FIG. 5d-6

FIG. 5d

18/30

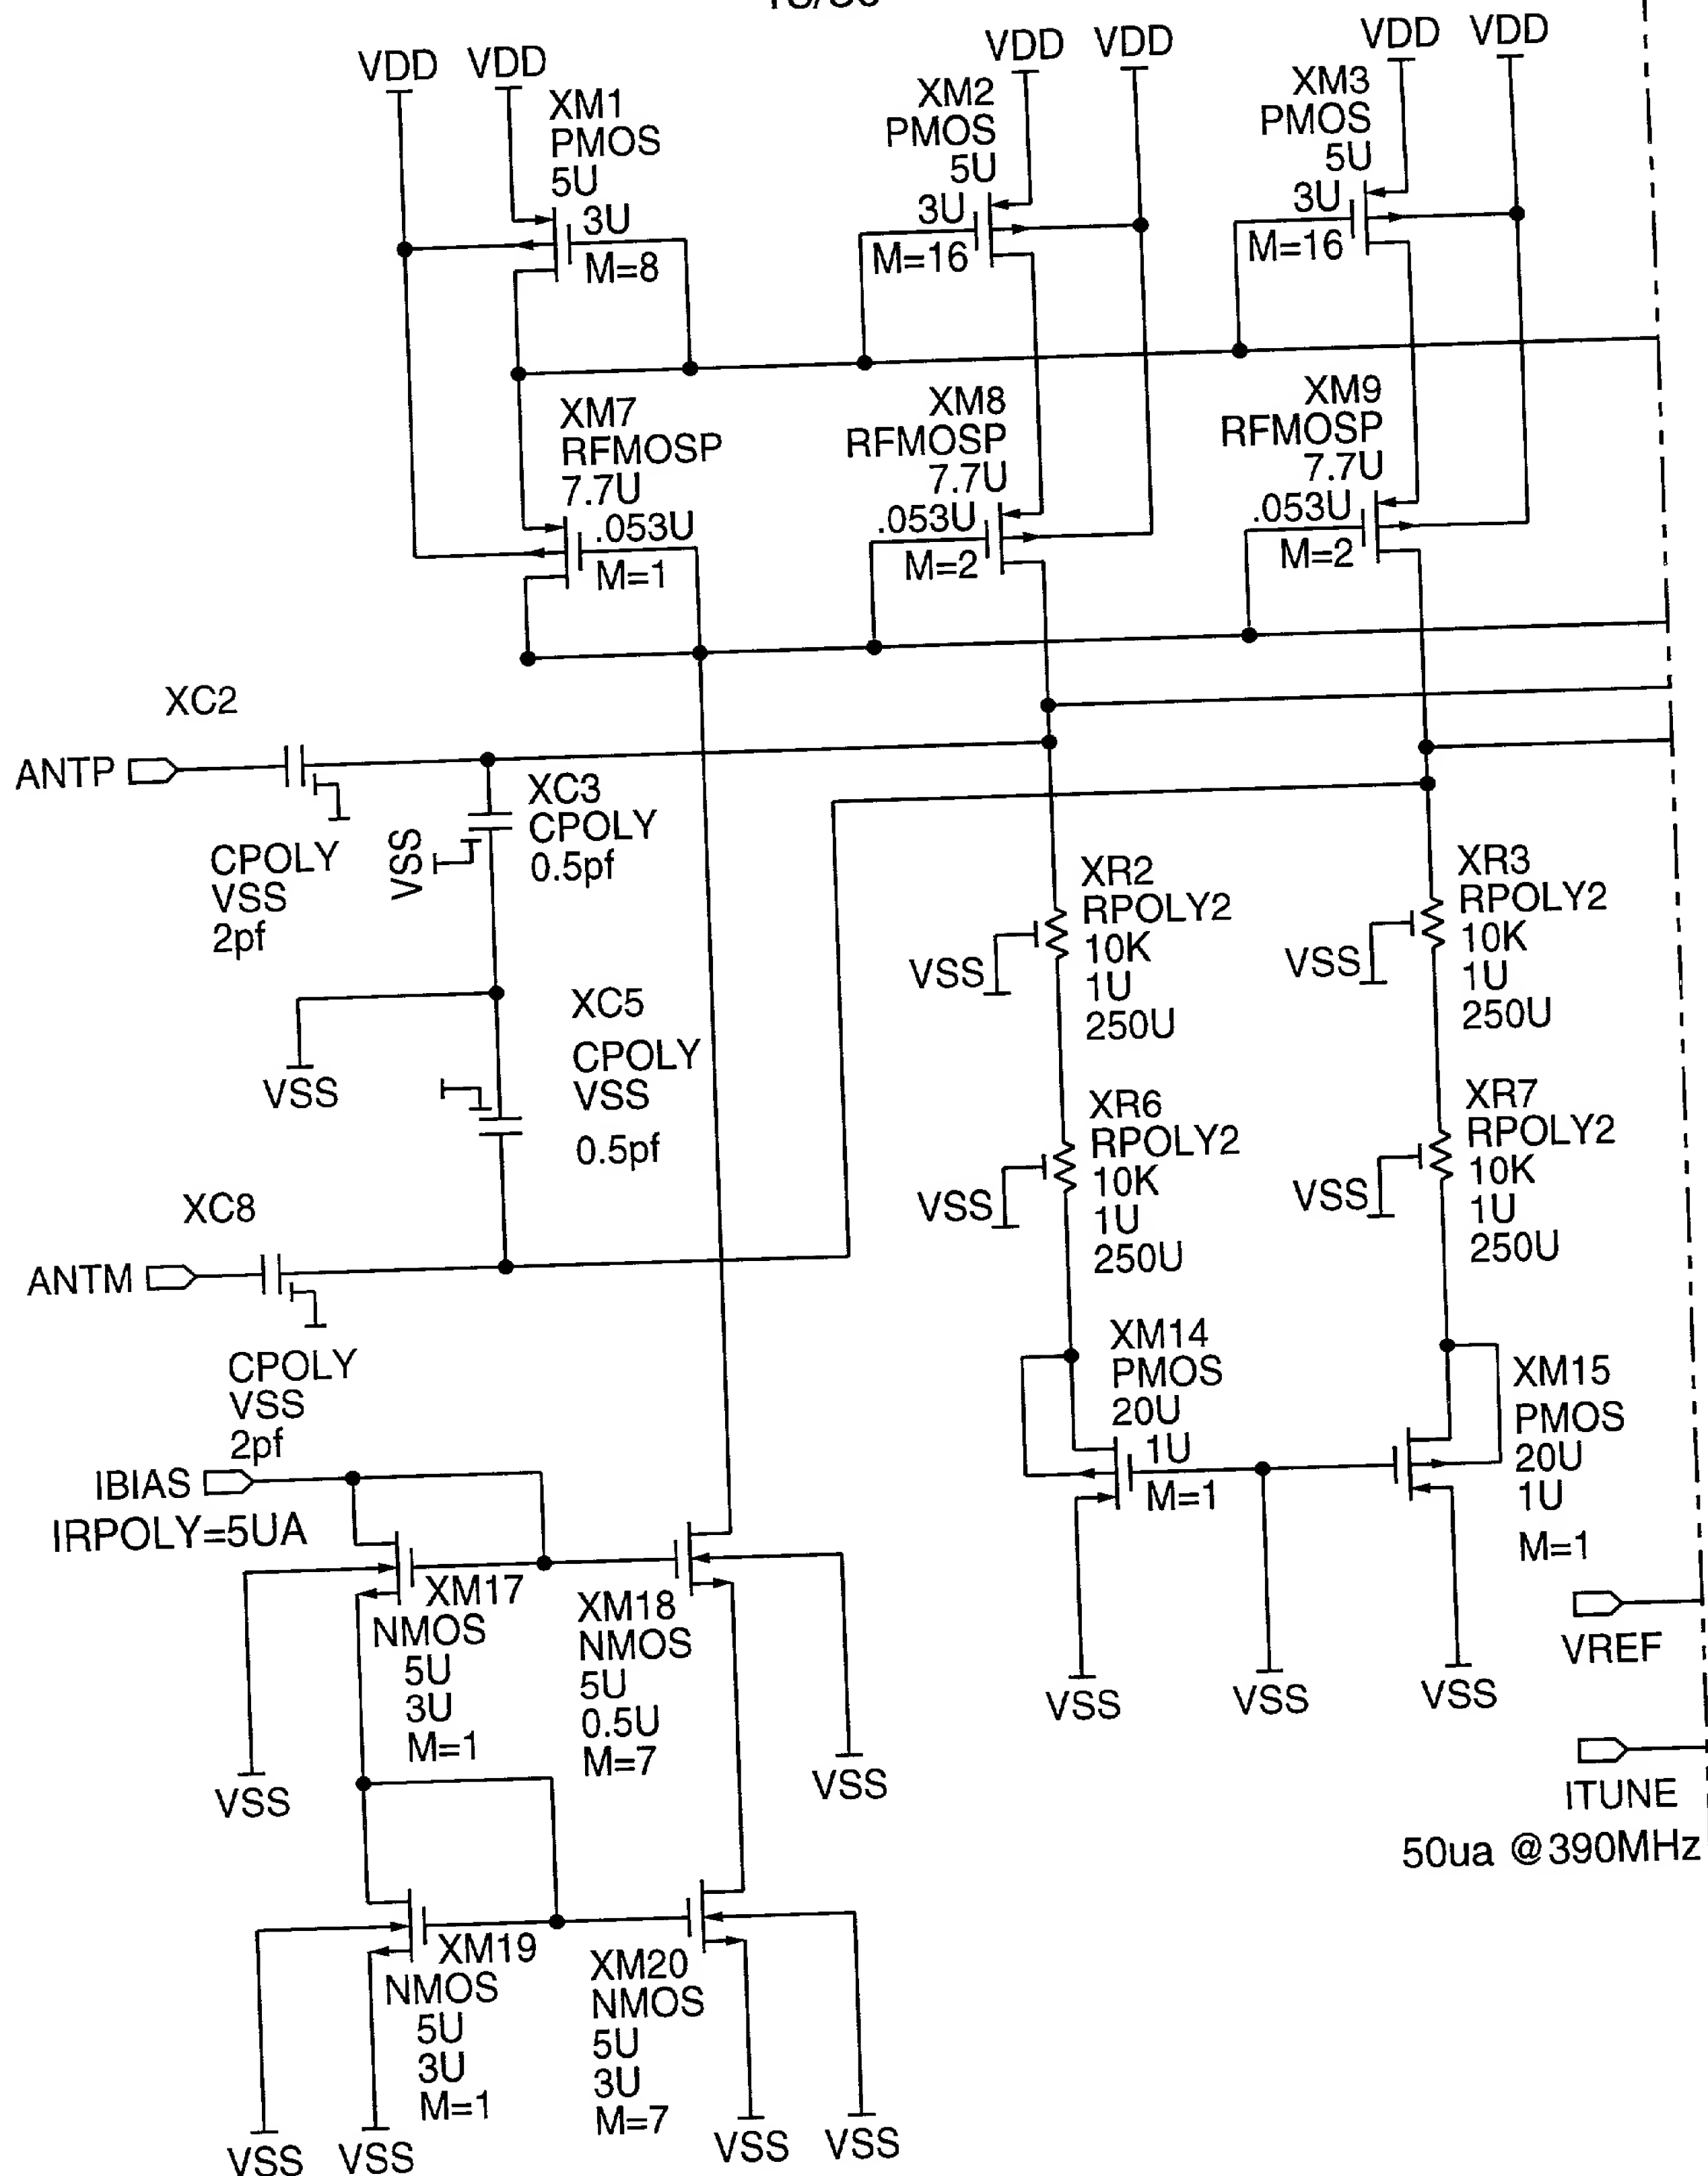
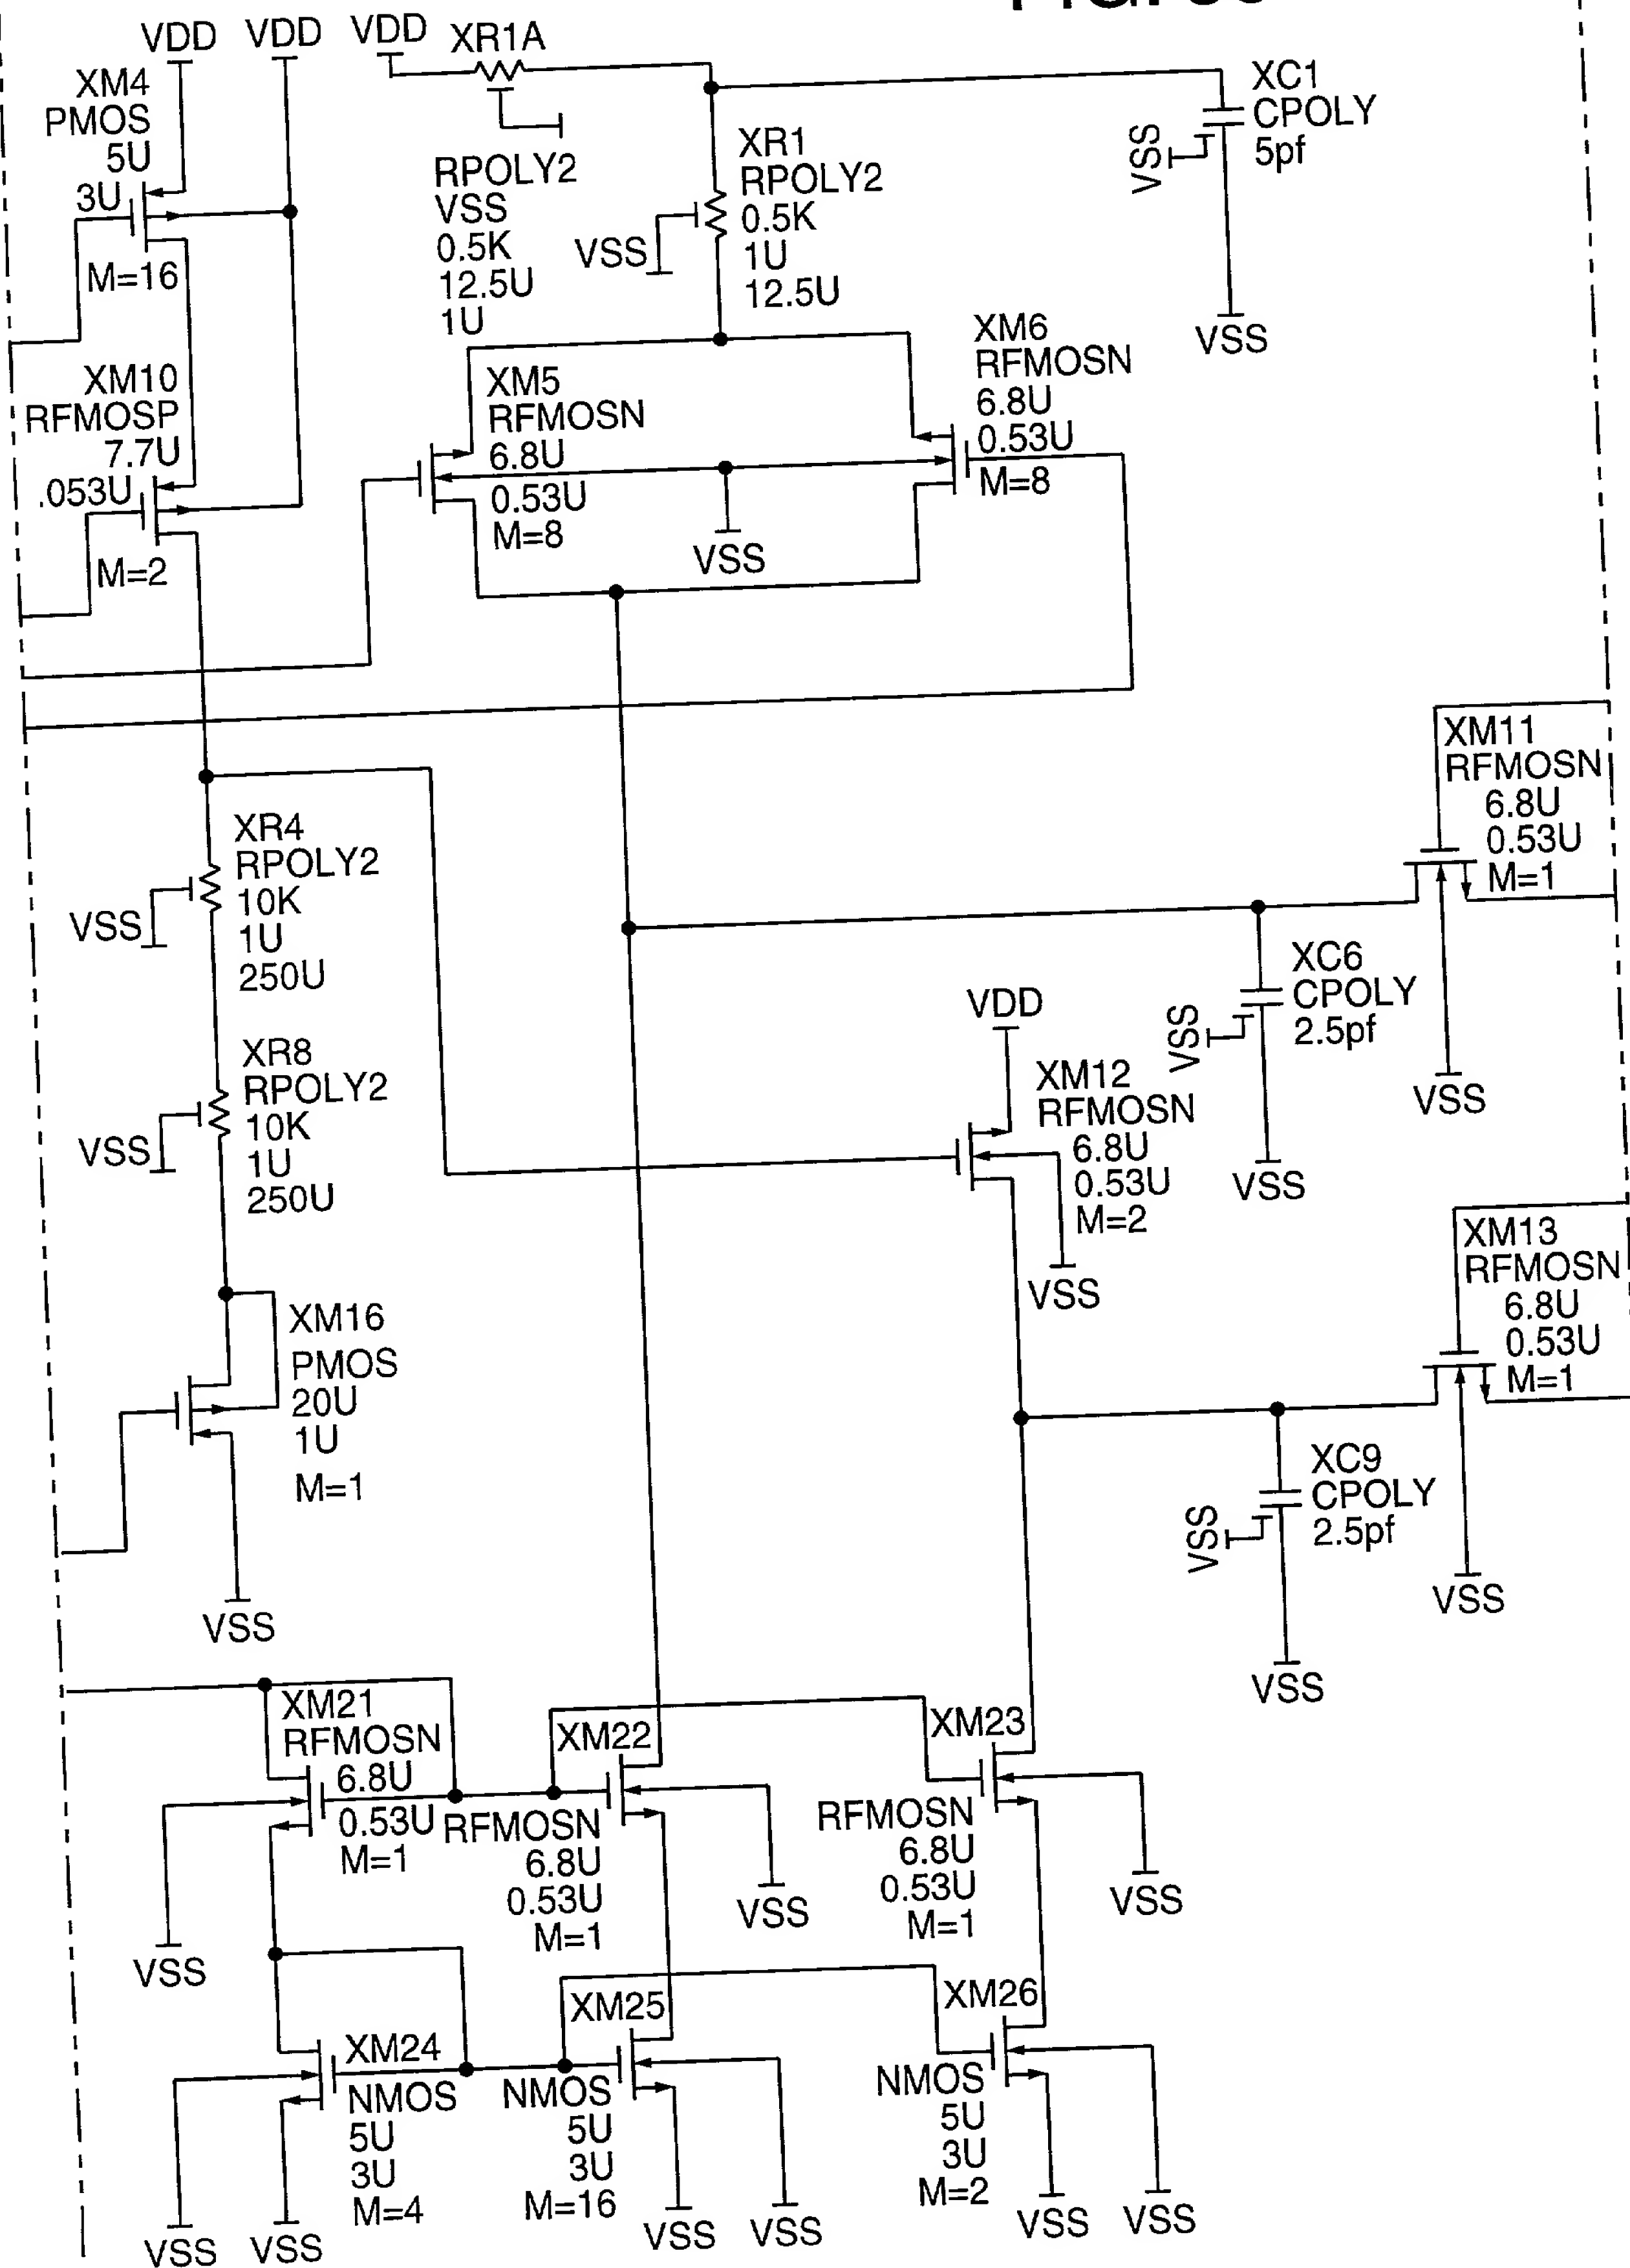


FIG. 5e-1

19/30

FIG. 5e-2



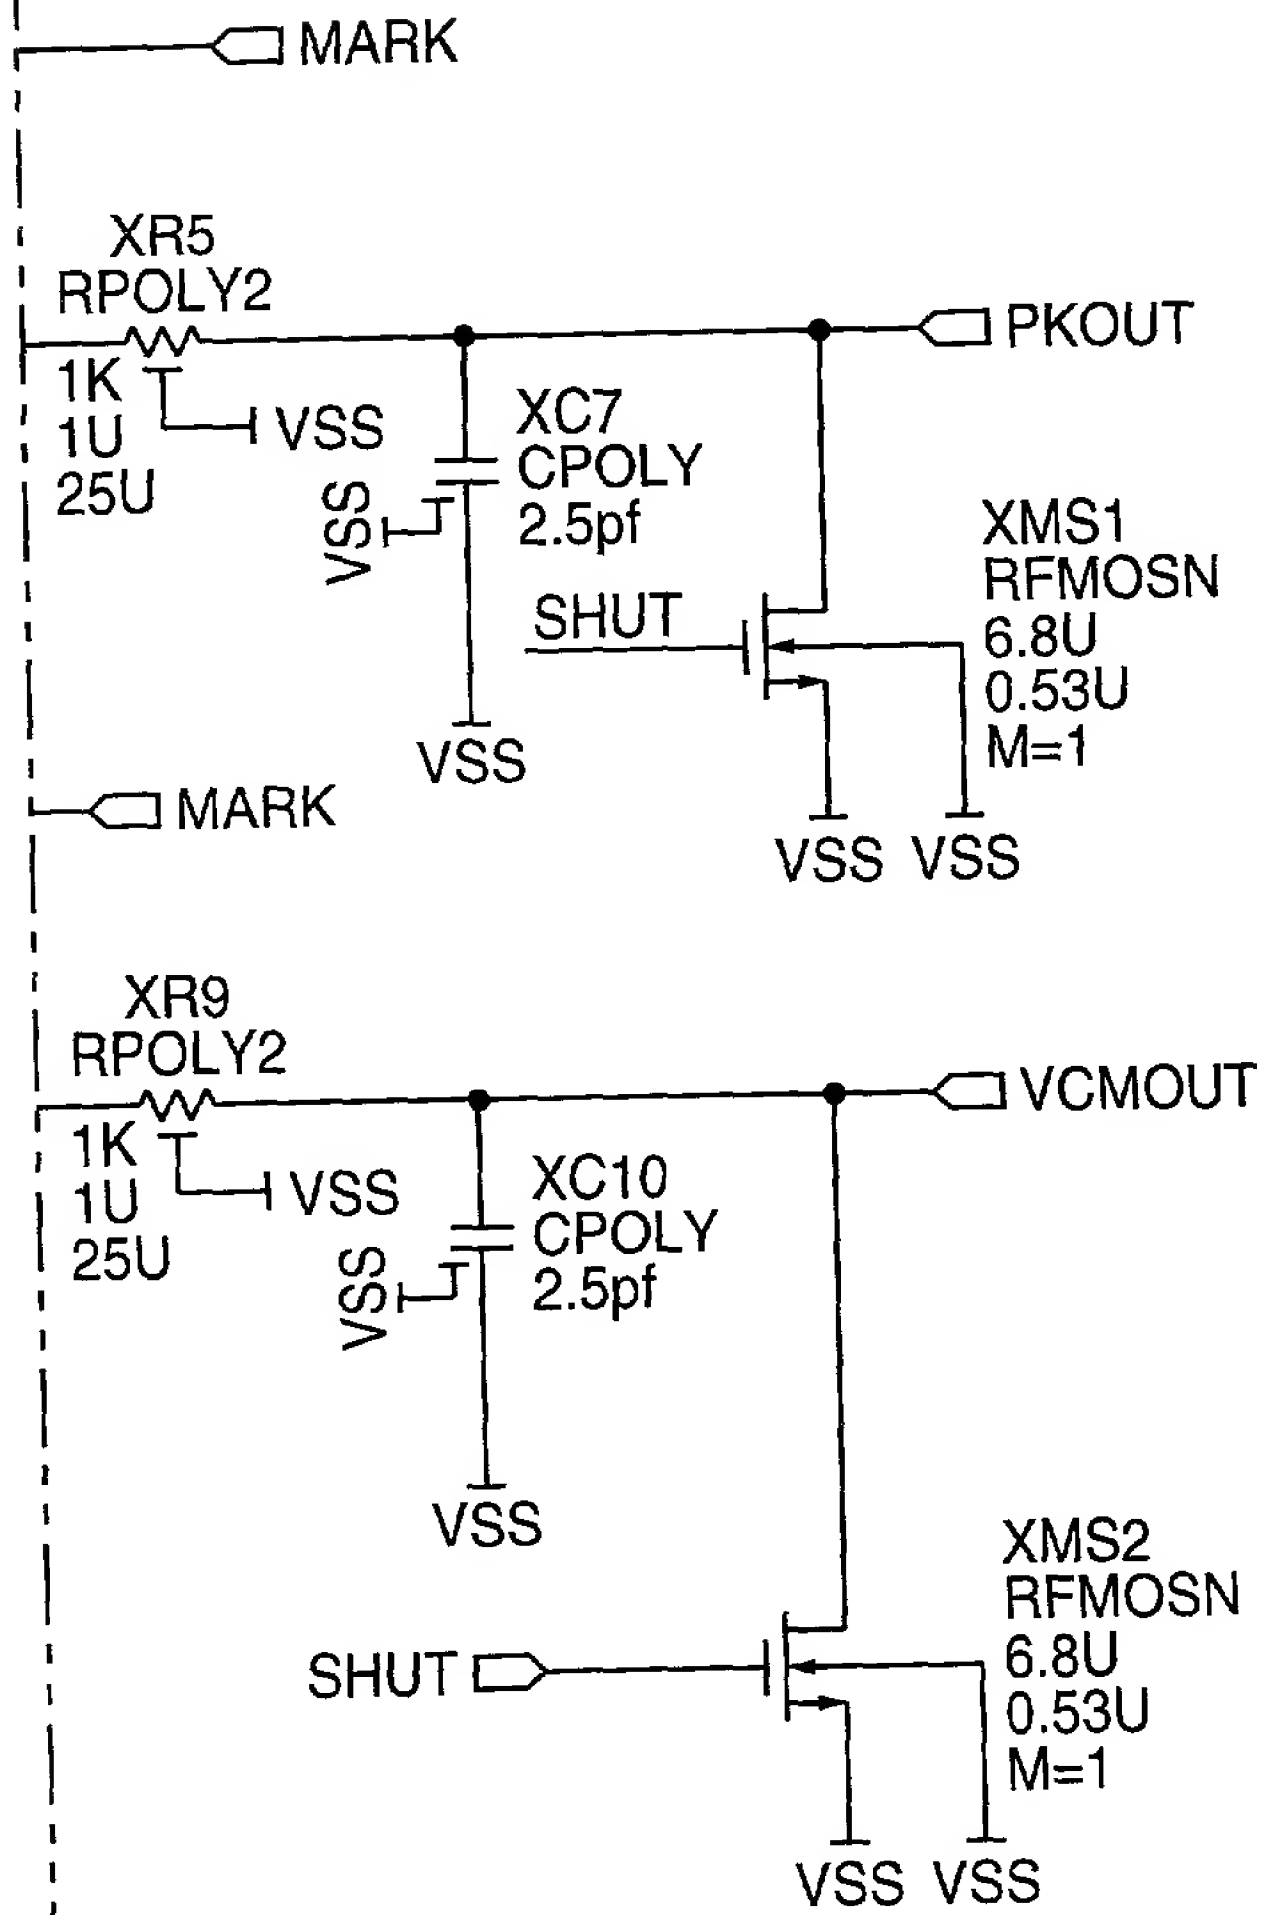
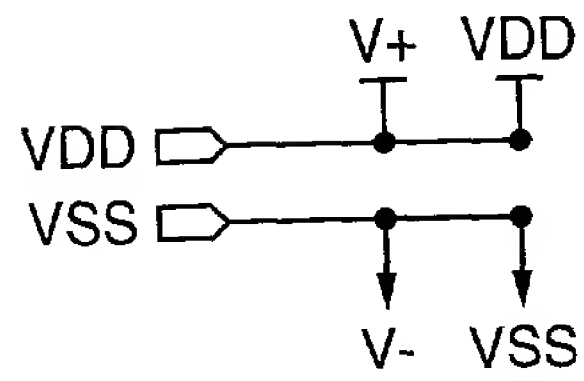


FIG. 5e-3

FIG. 5e-1	FIG. 5e-2	FIG. 5e-3
-----------	-----------	-----------

FIG. 5e


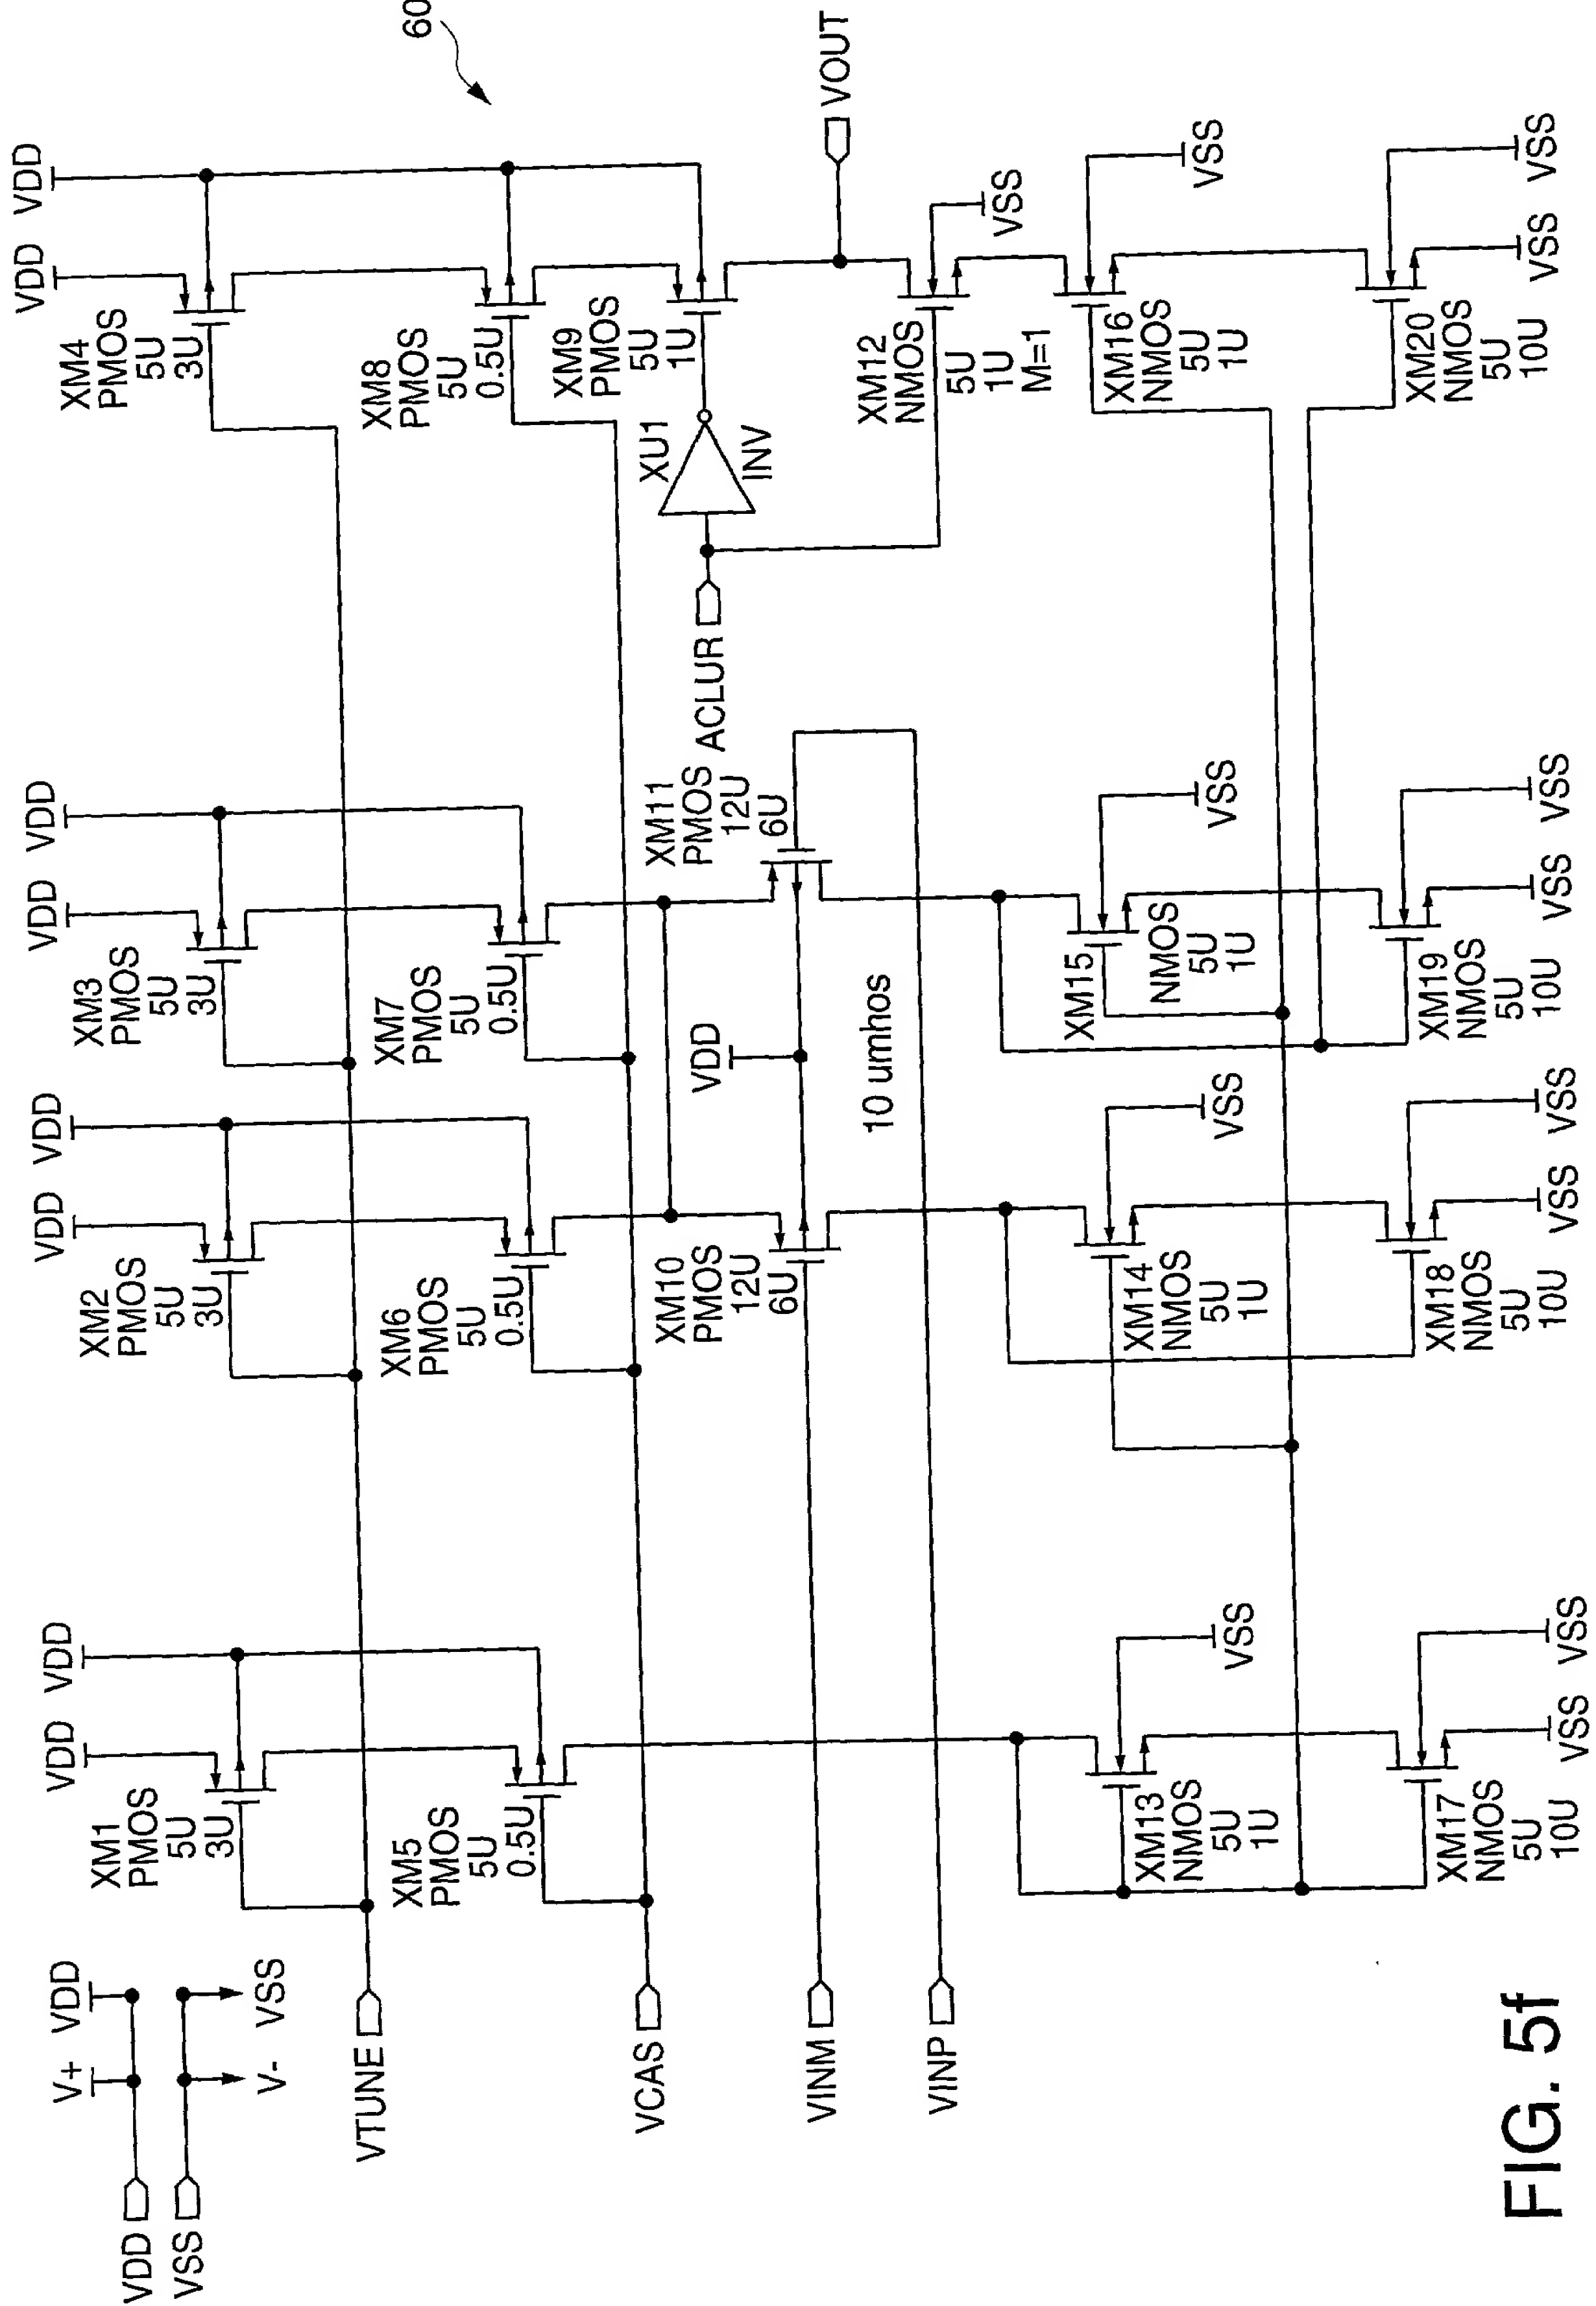


FIG. 5f

FIG. 5g-1

POWER AMPLIFIER

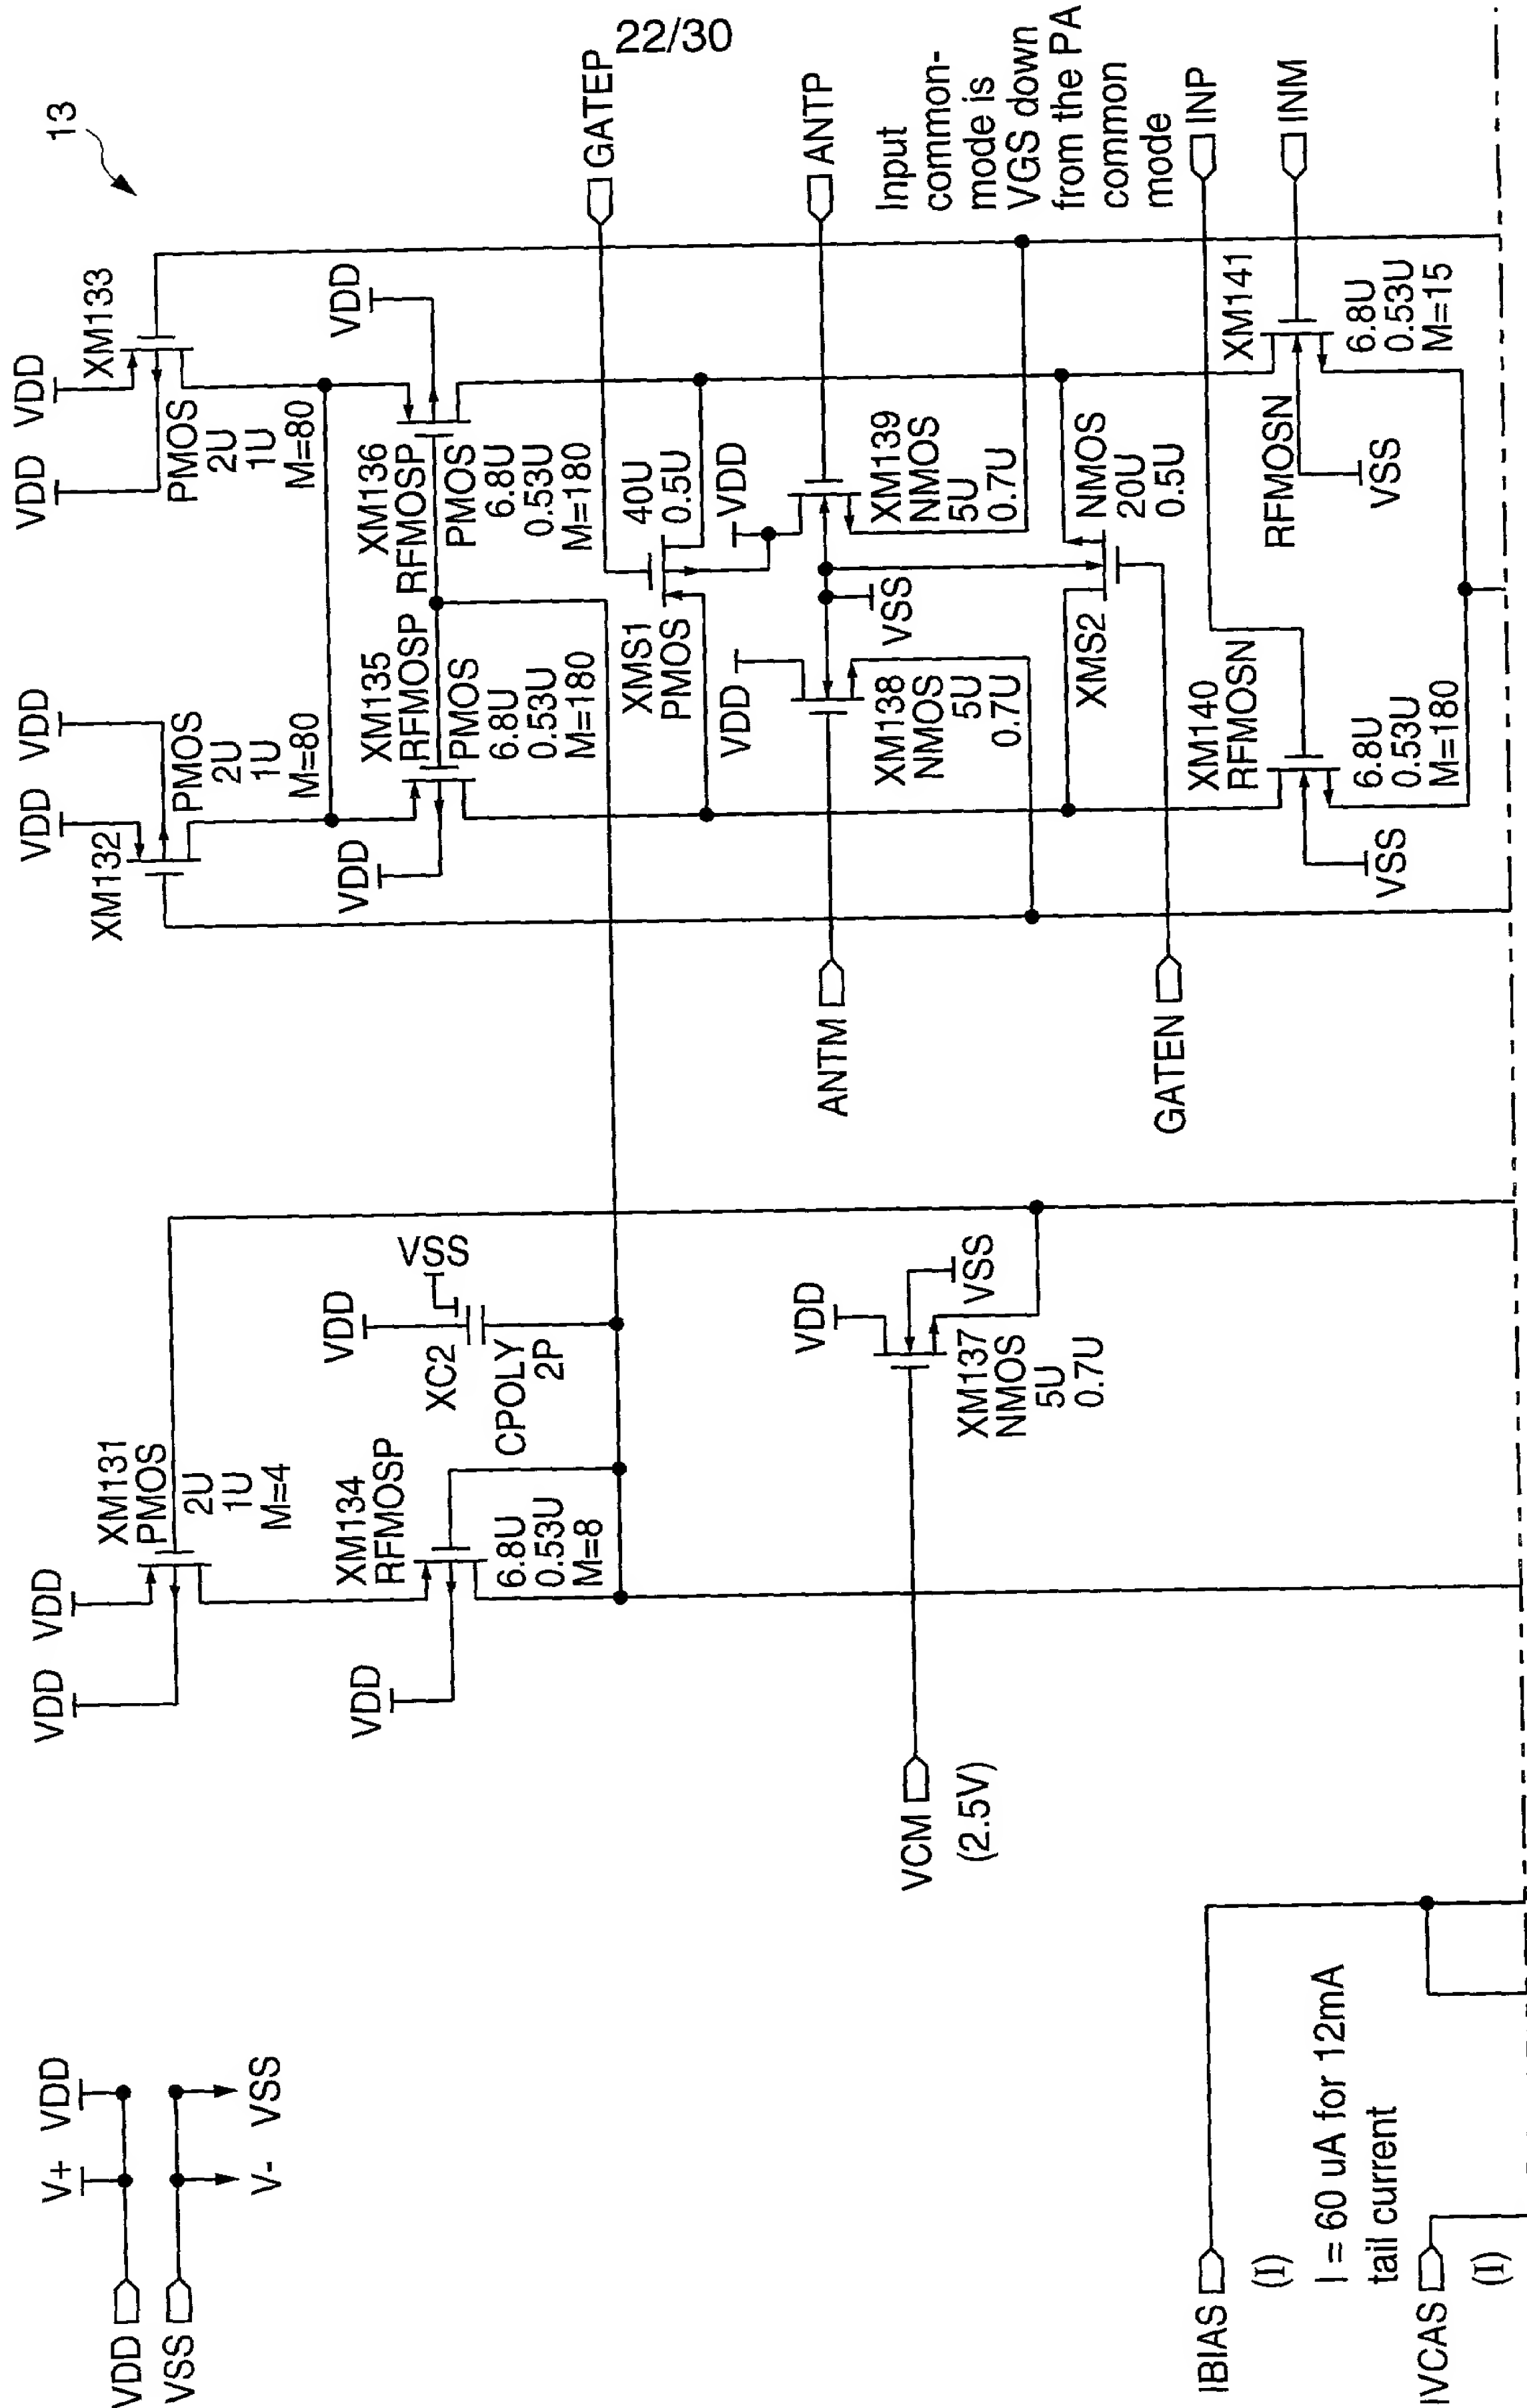

23/30


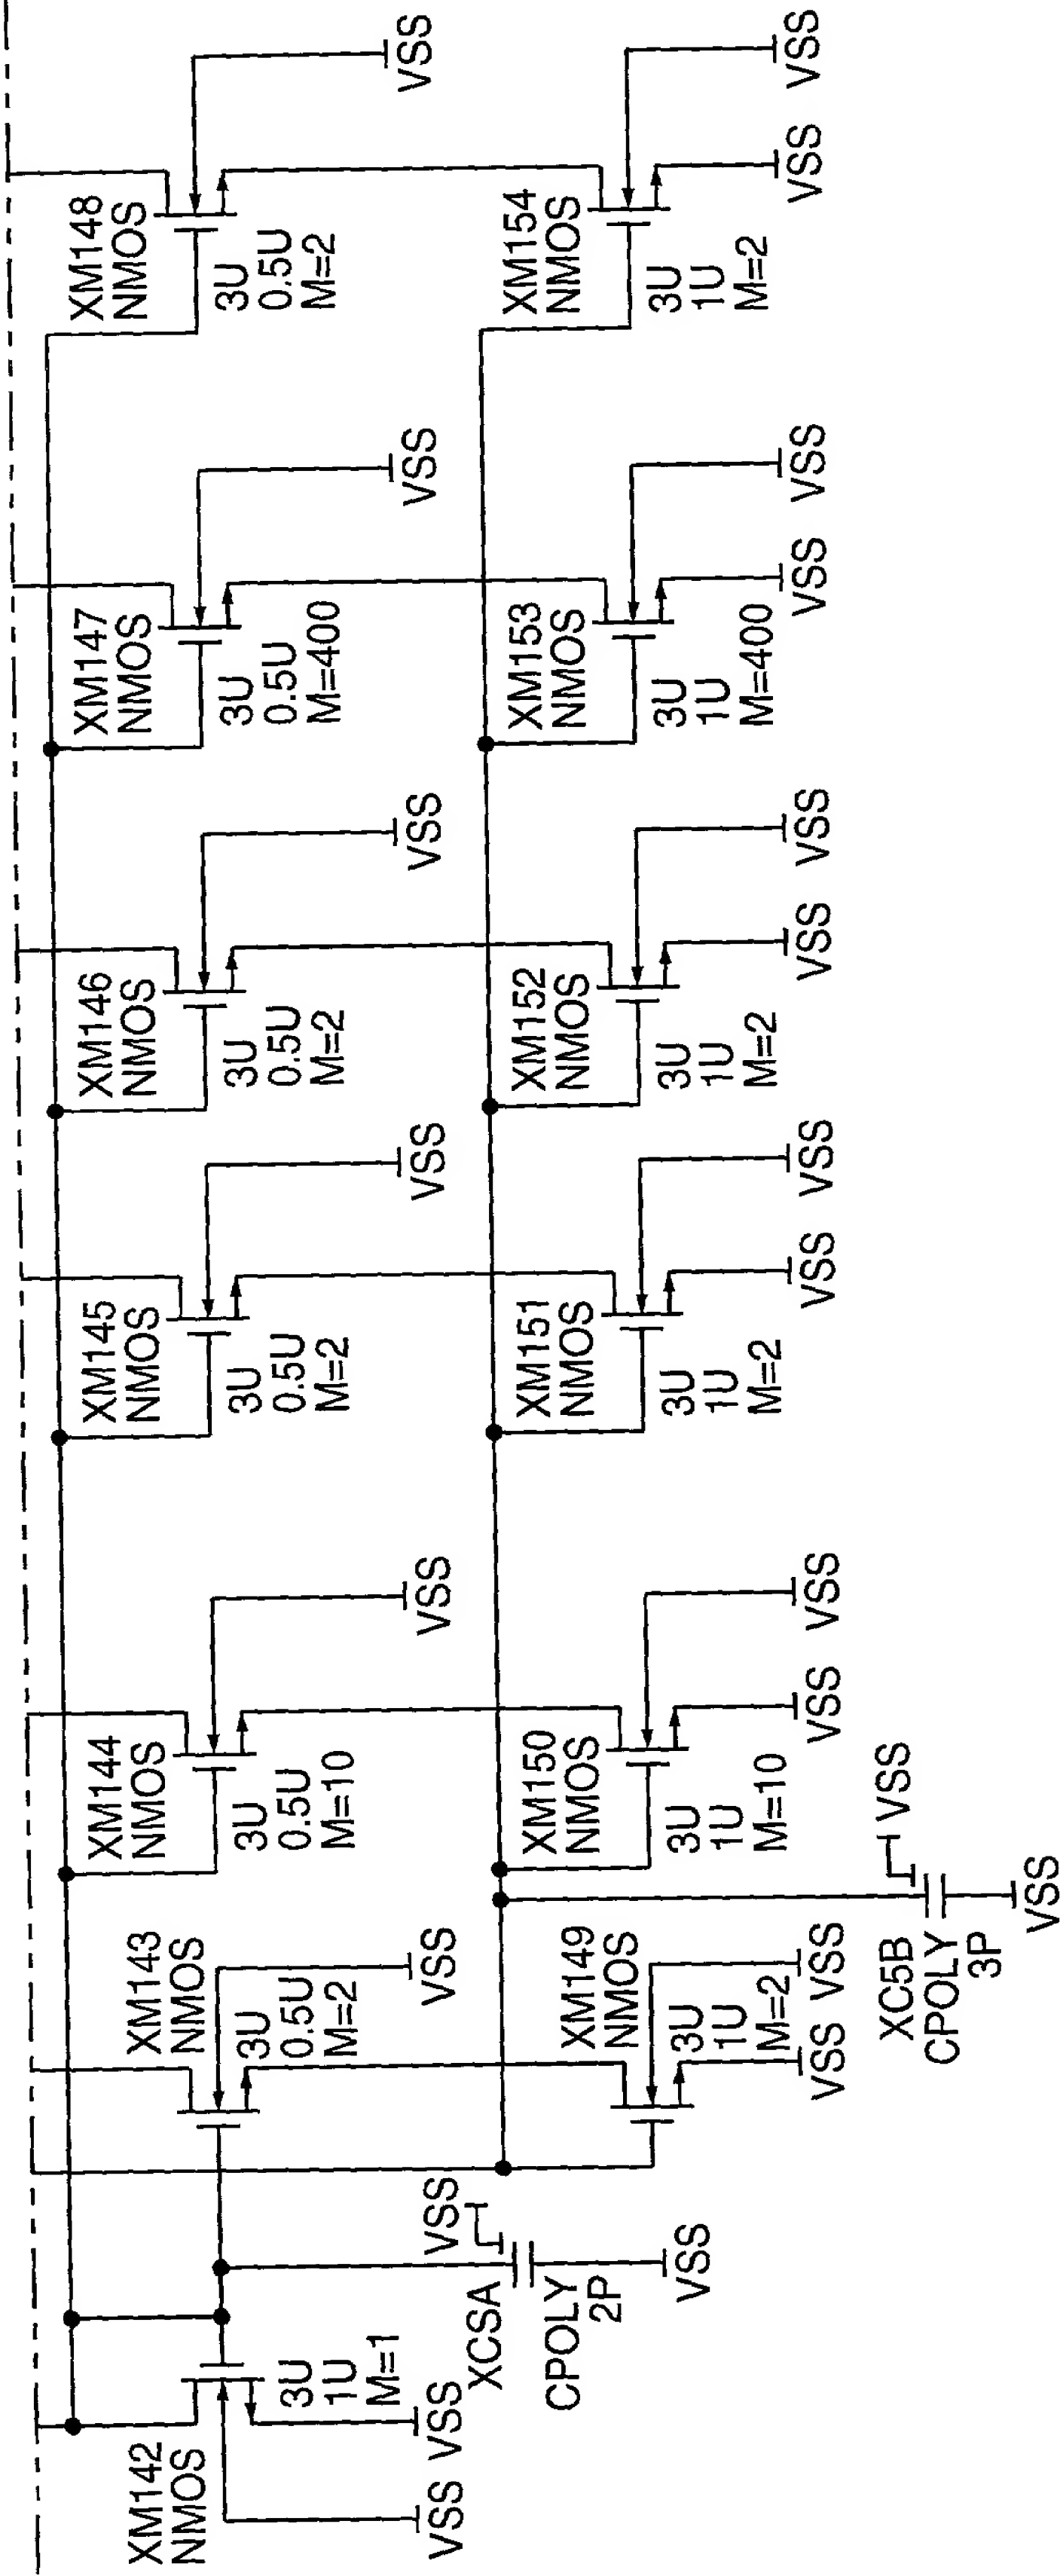


FIG. 5g-2

FIG. 5g-1
FIG. 5g-2

FIG. 5g

FIG. 5h

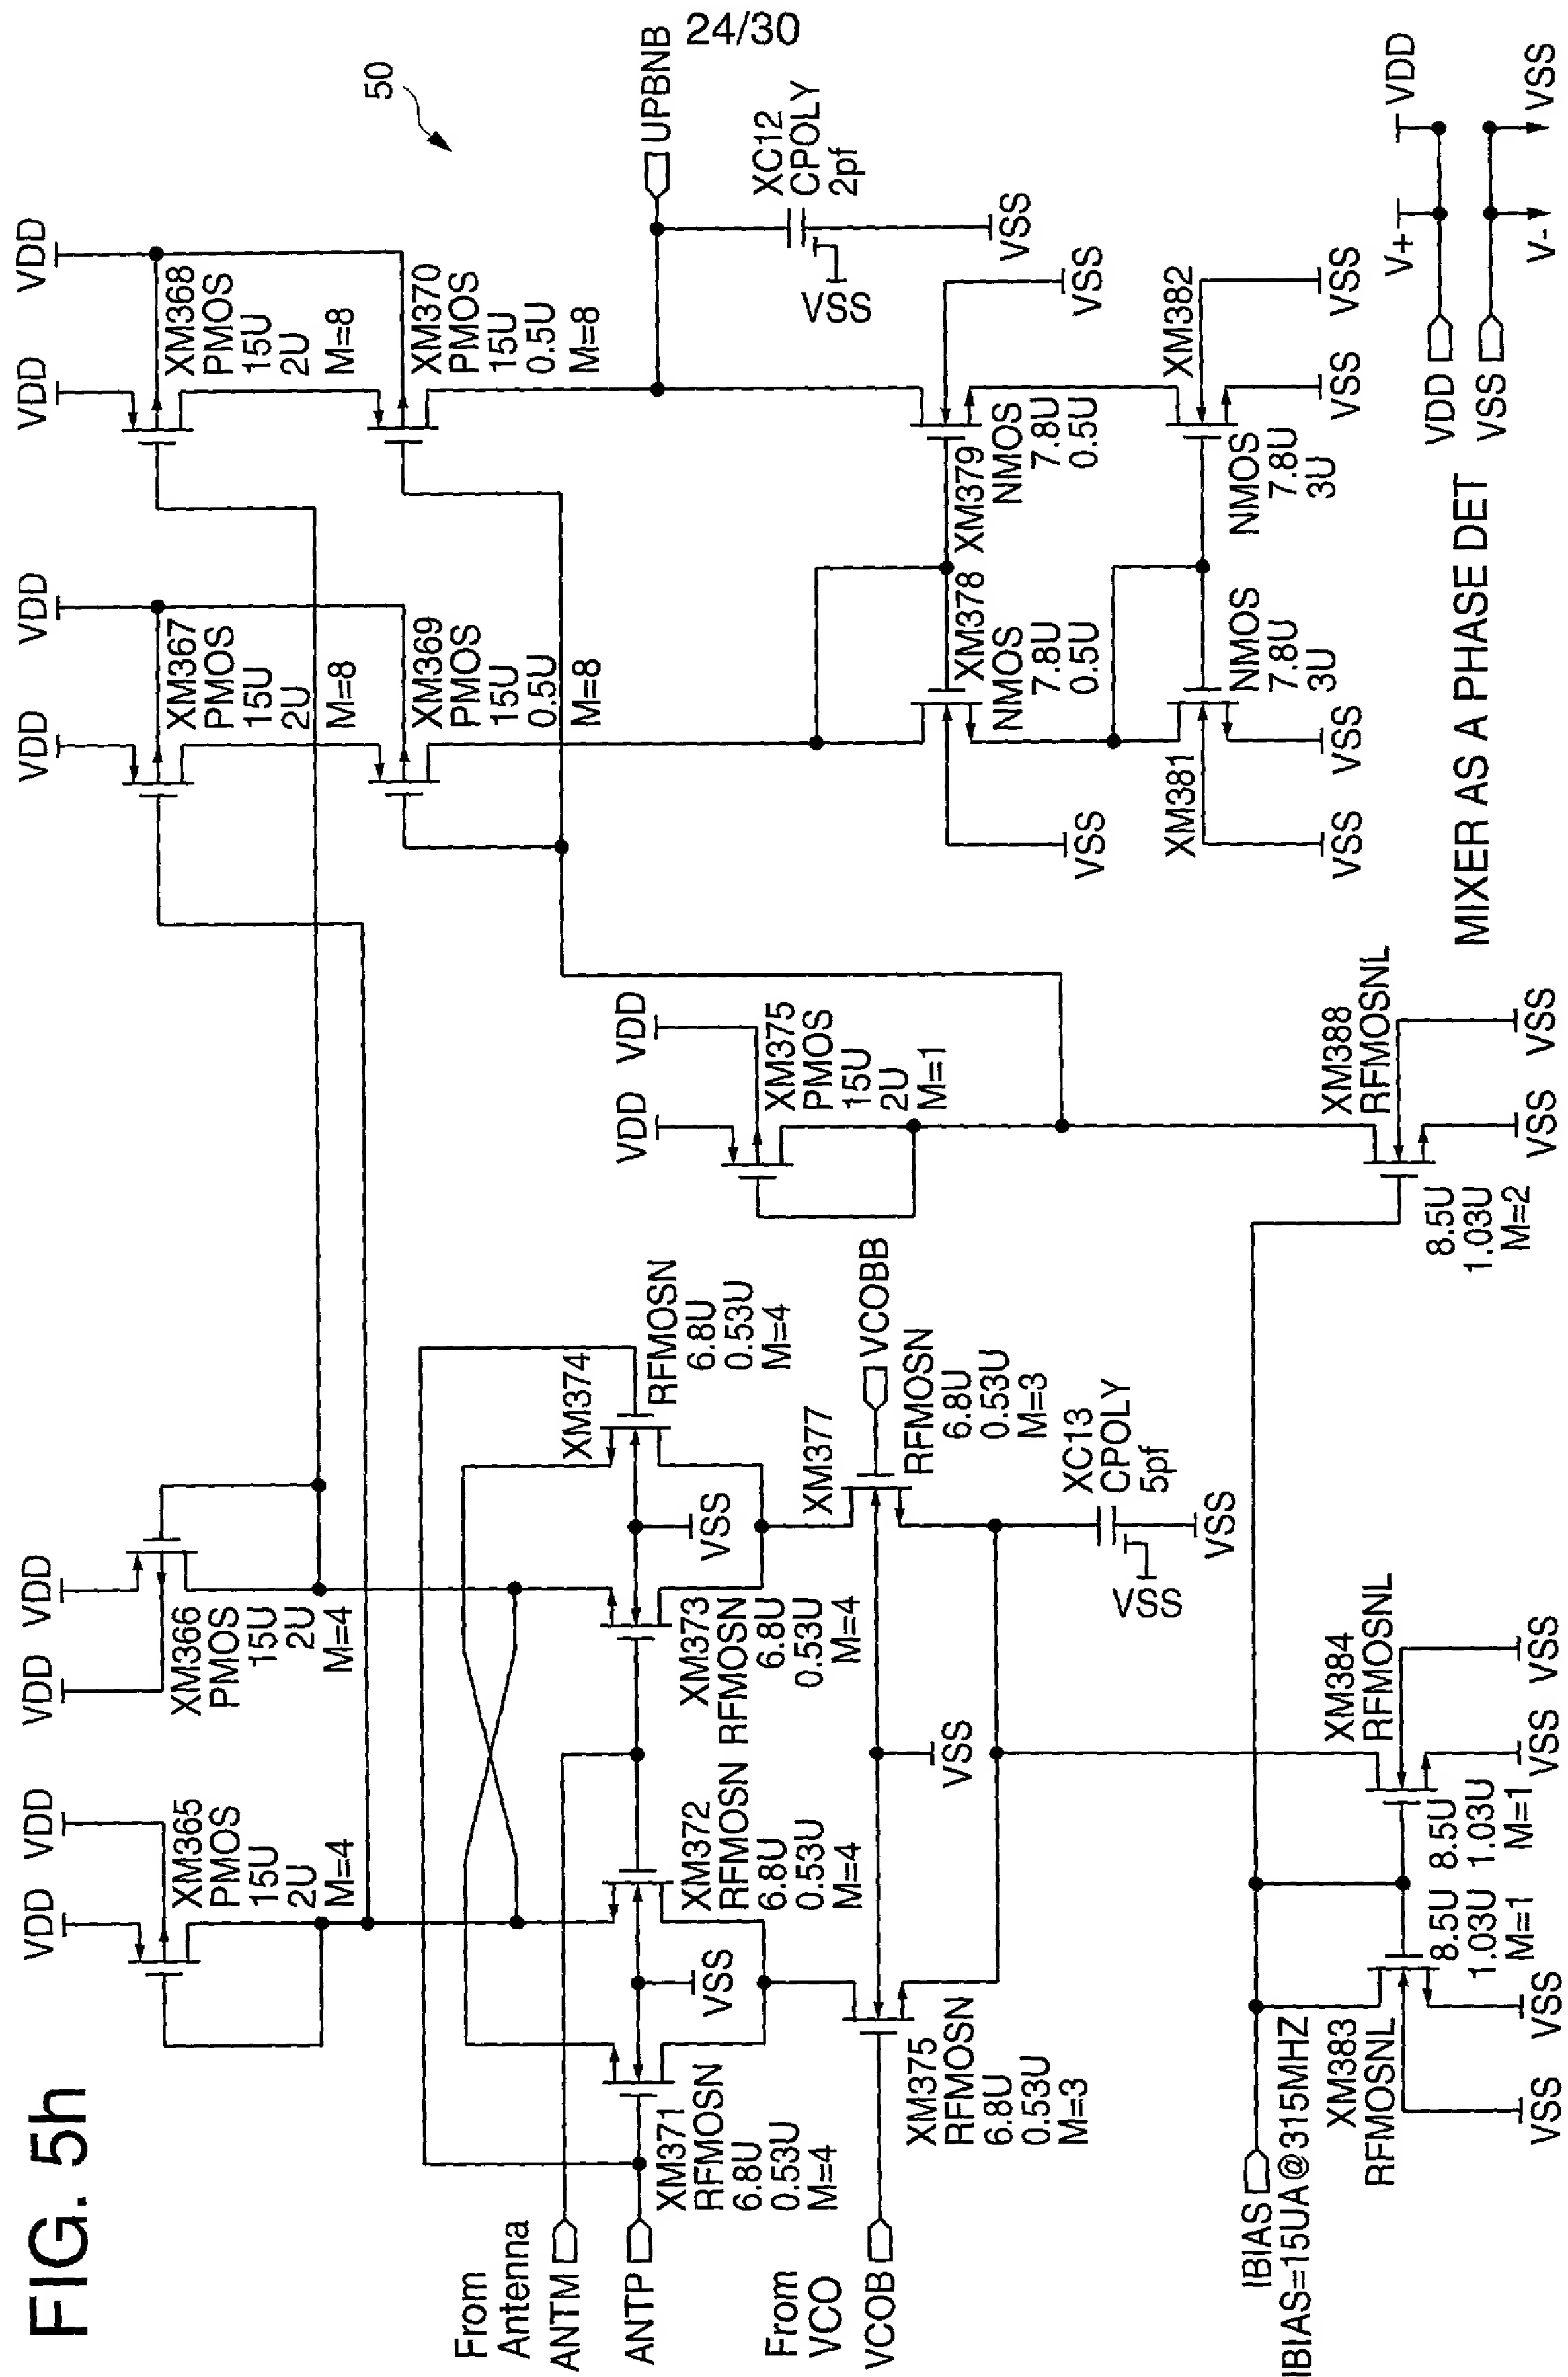

25/30

Gain (sin) = 5V per 100ns for 90 deg
Linearity (max) = 200MV
IBIAS = IPOLY

FIG. 5i-1

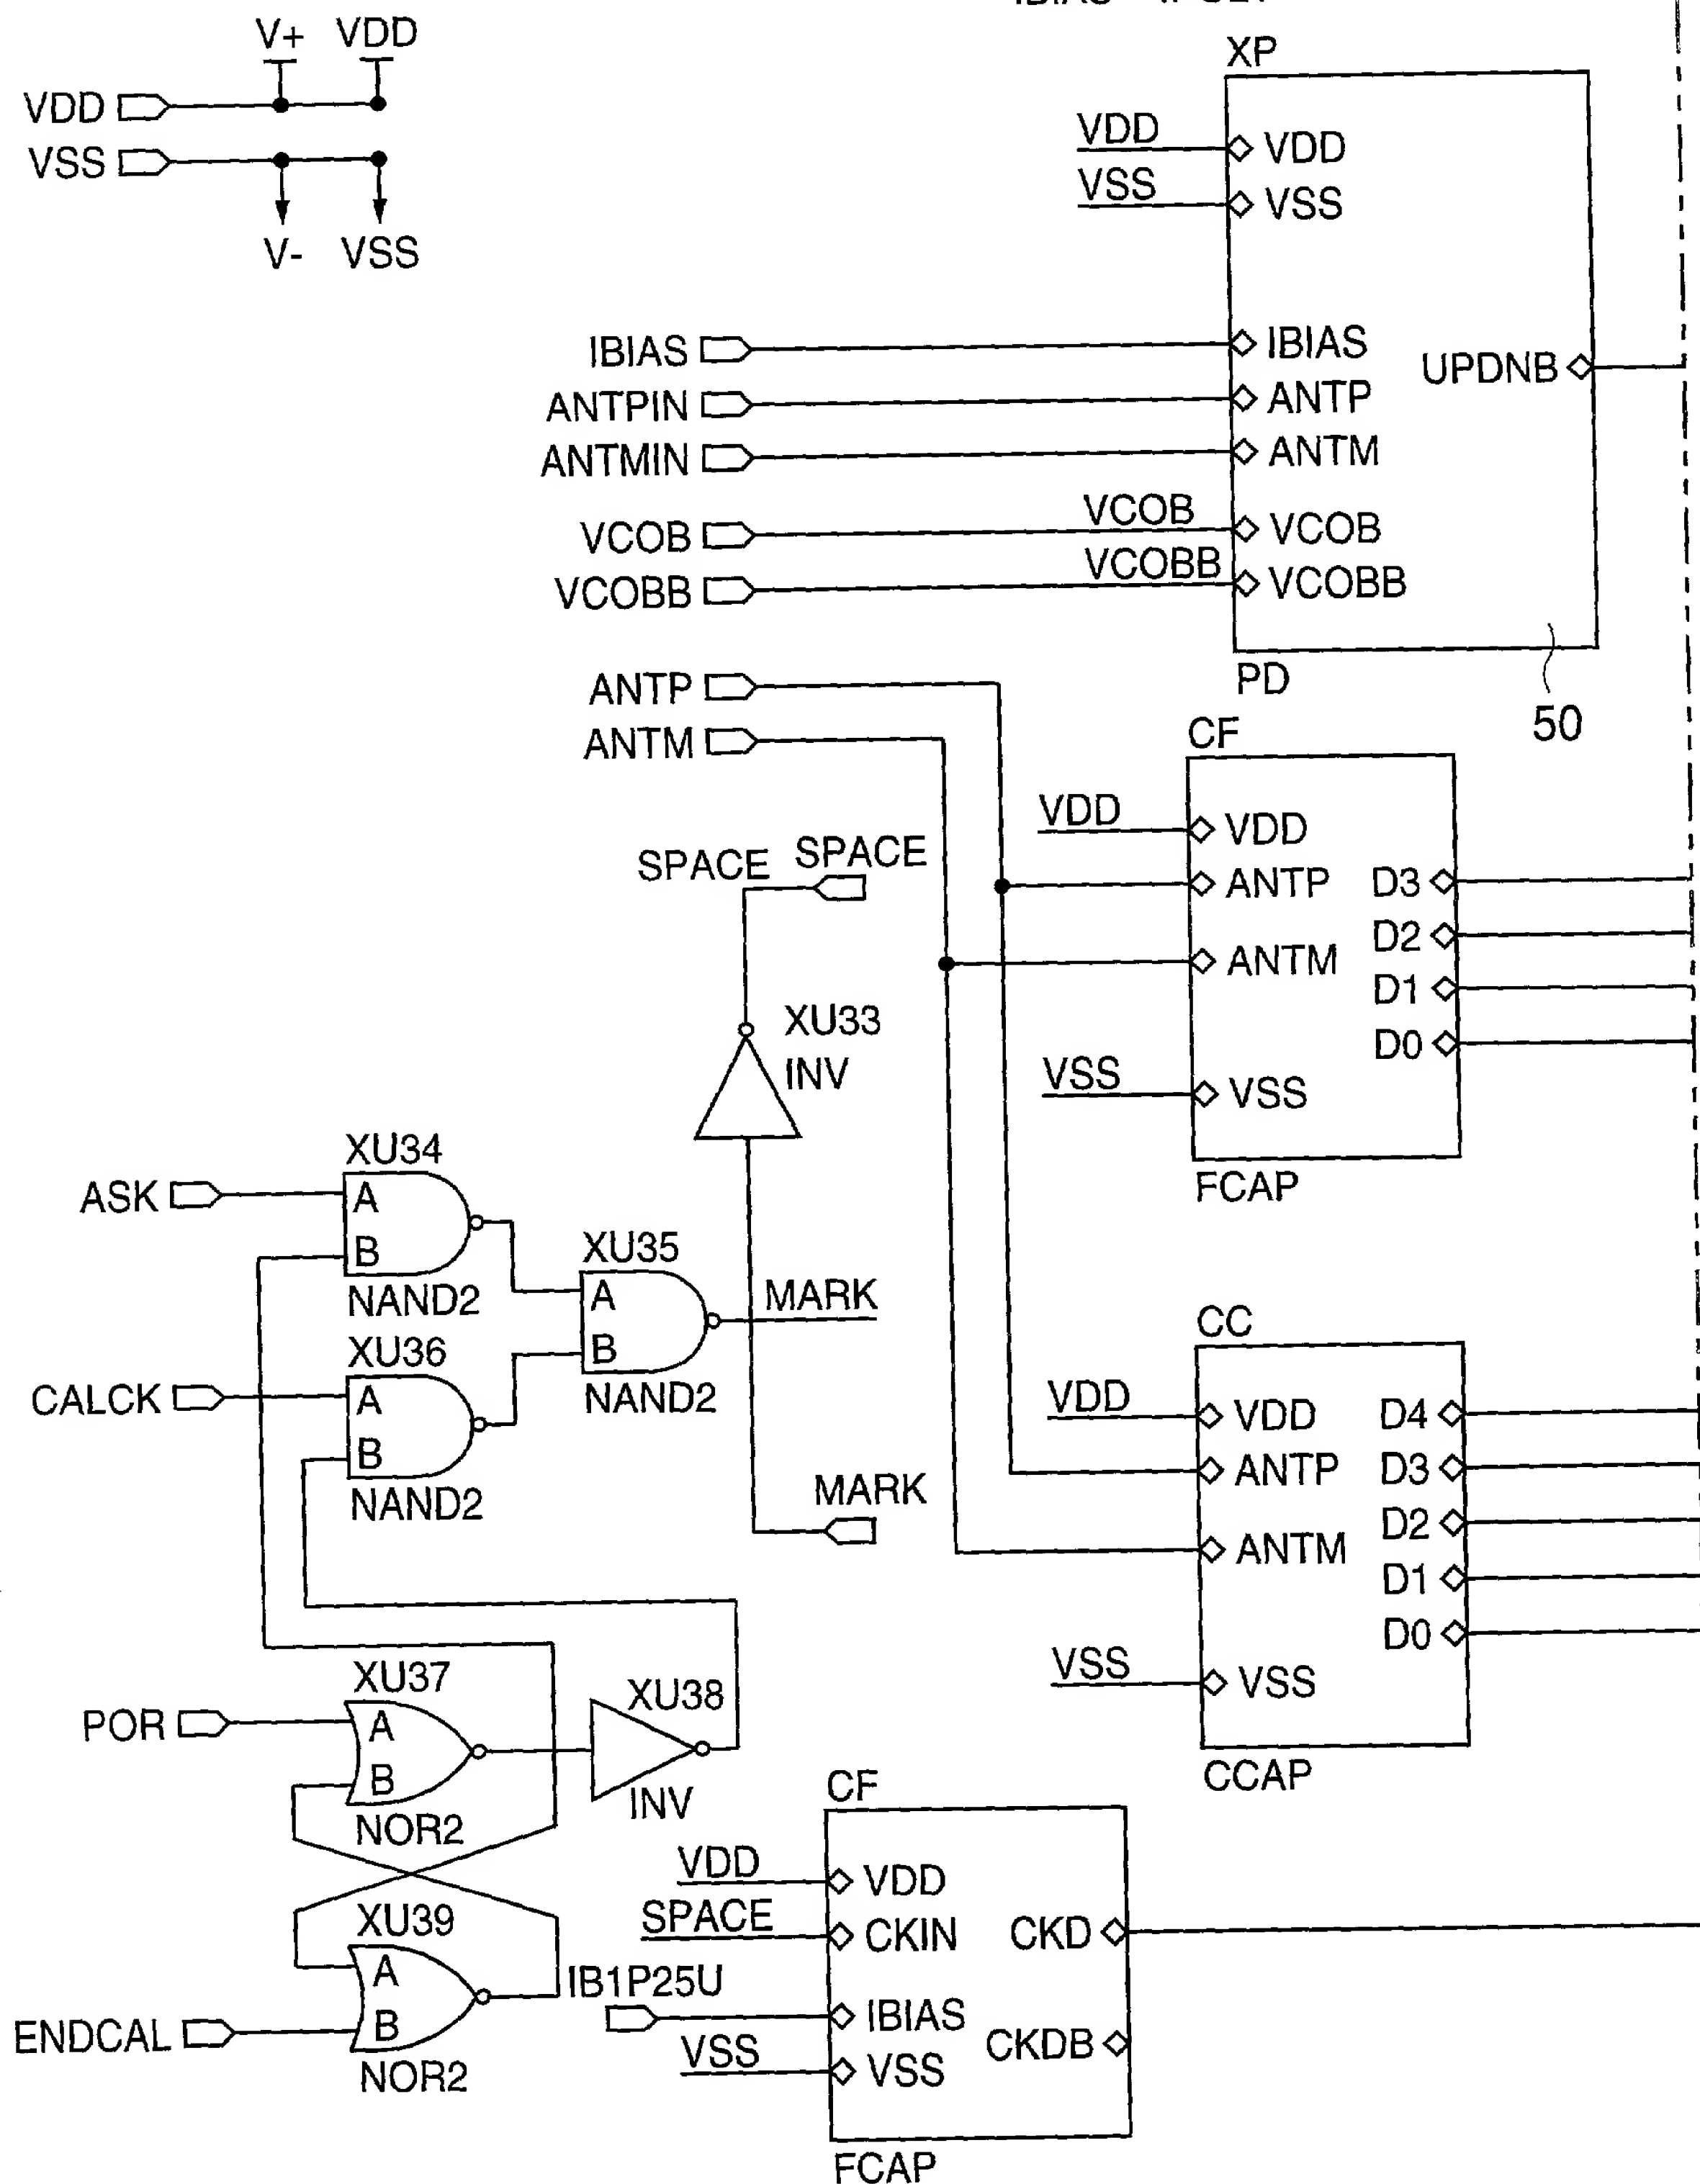


FIG. 5i-2


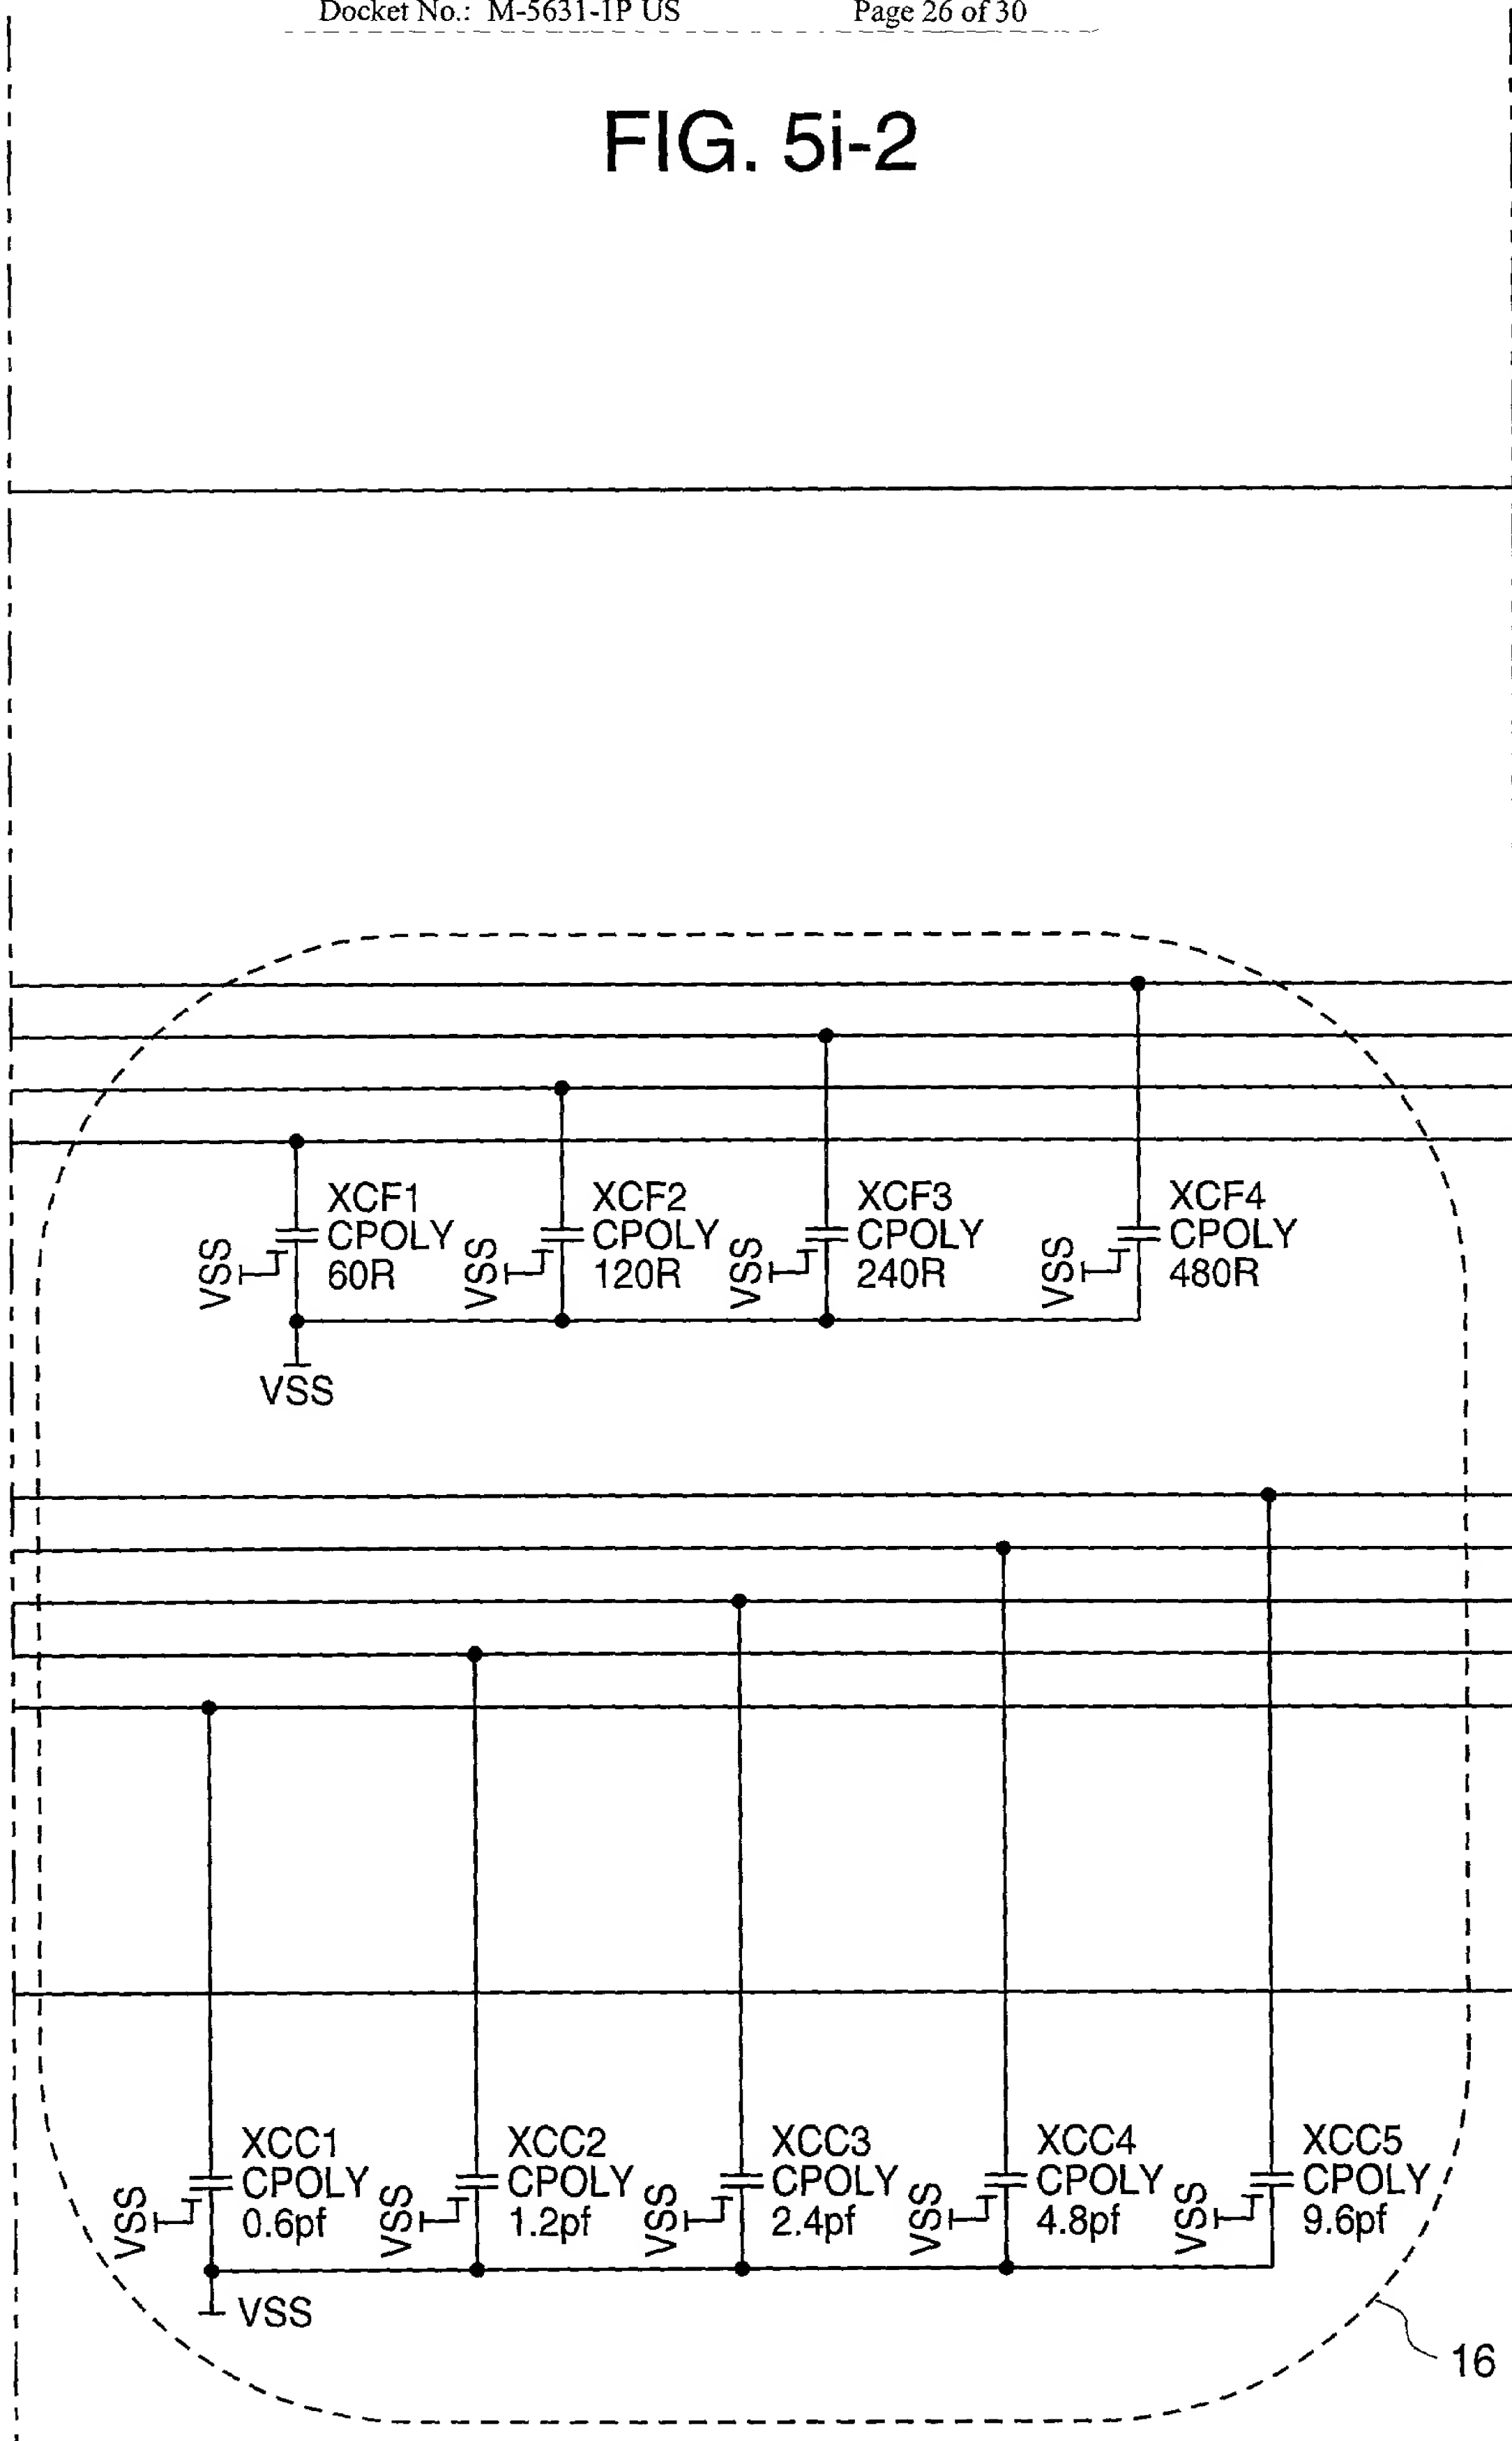


FIG. 5i

28/30

FIG. 5j-1

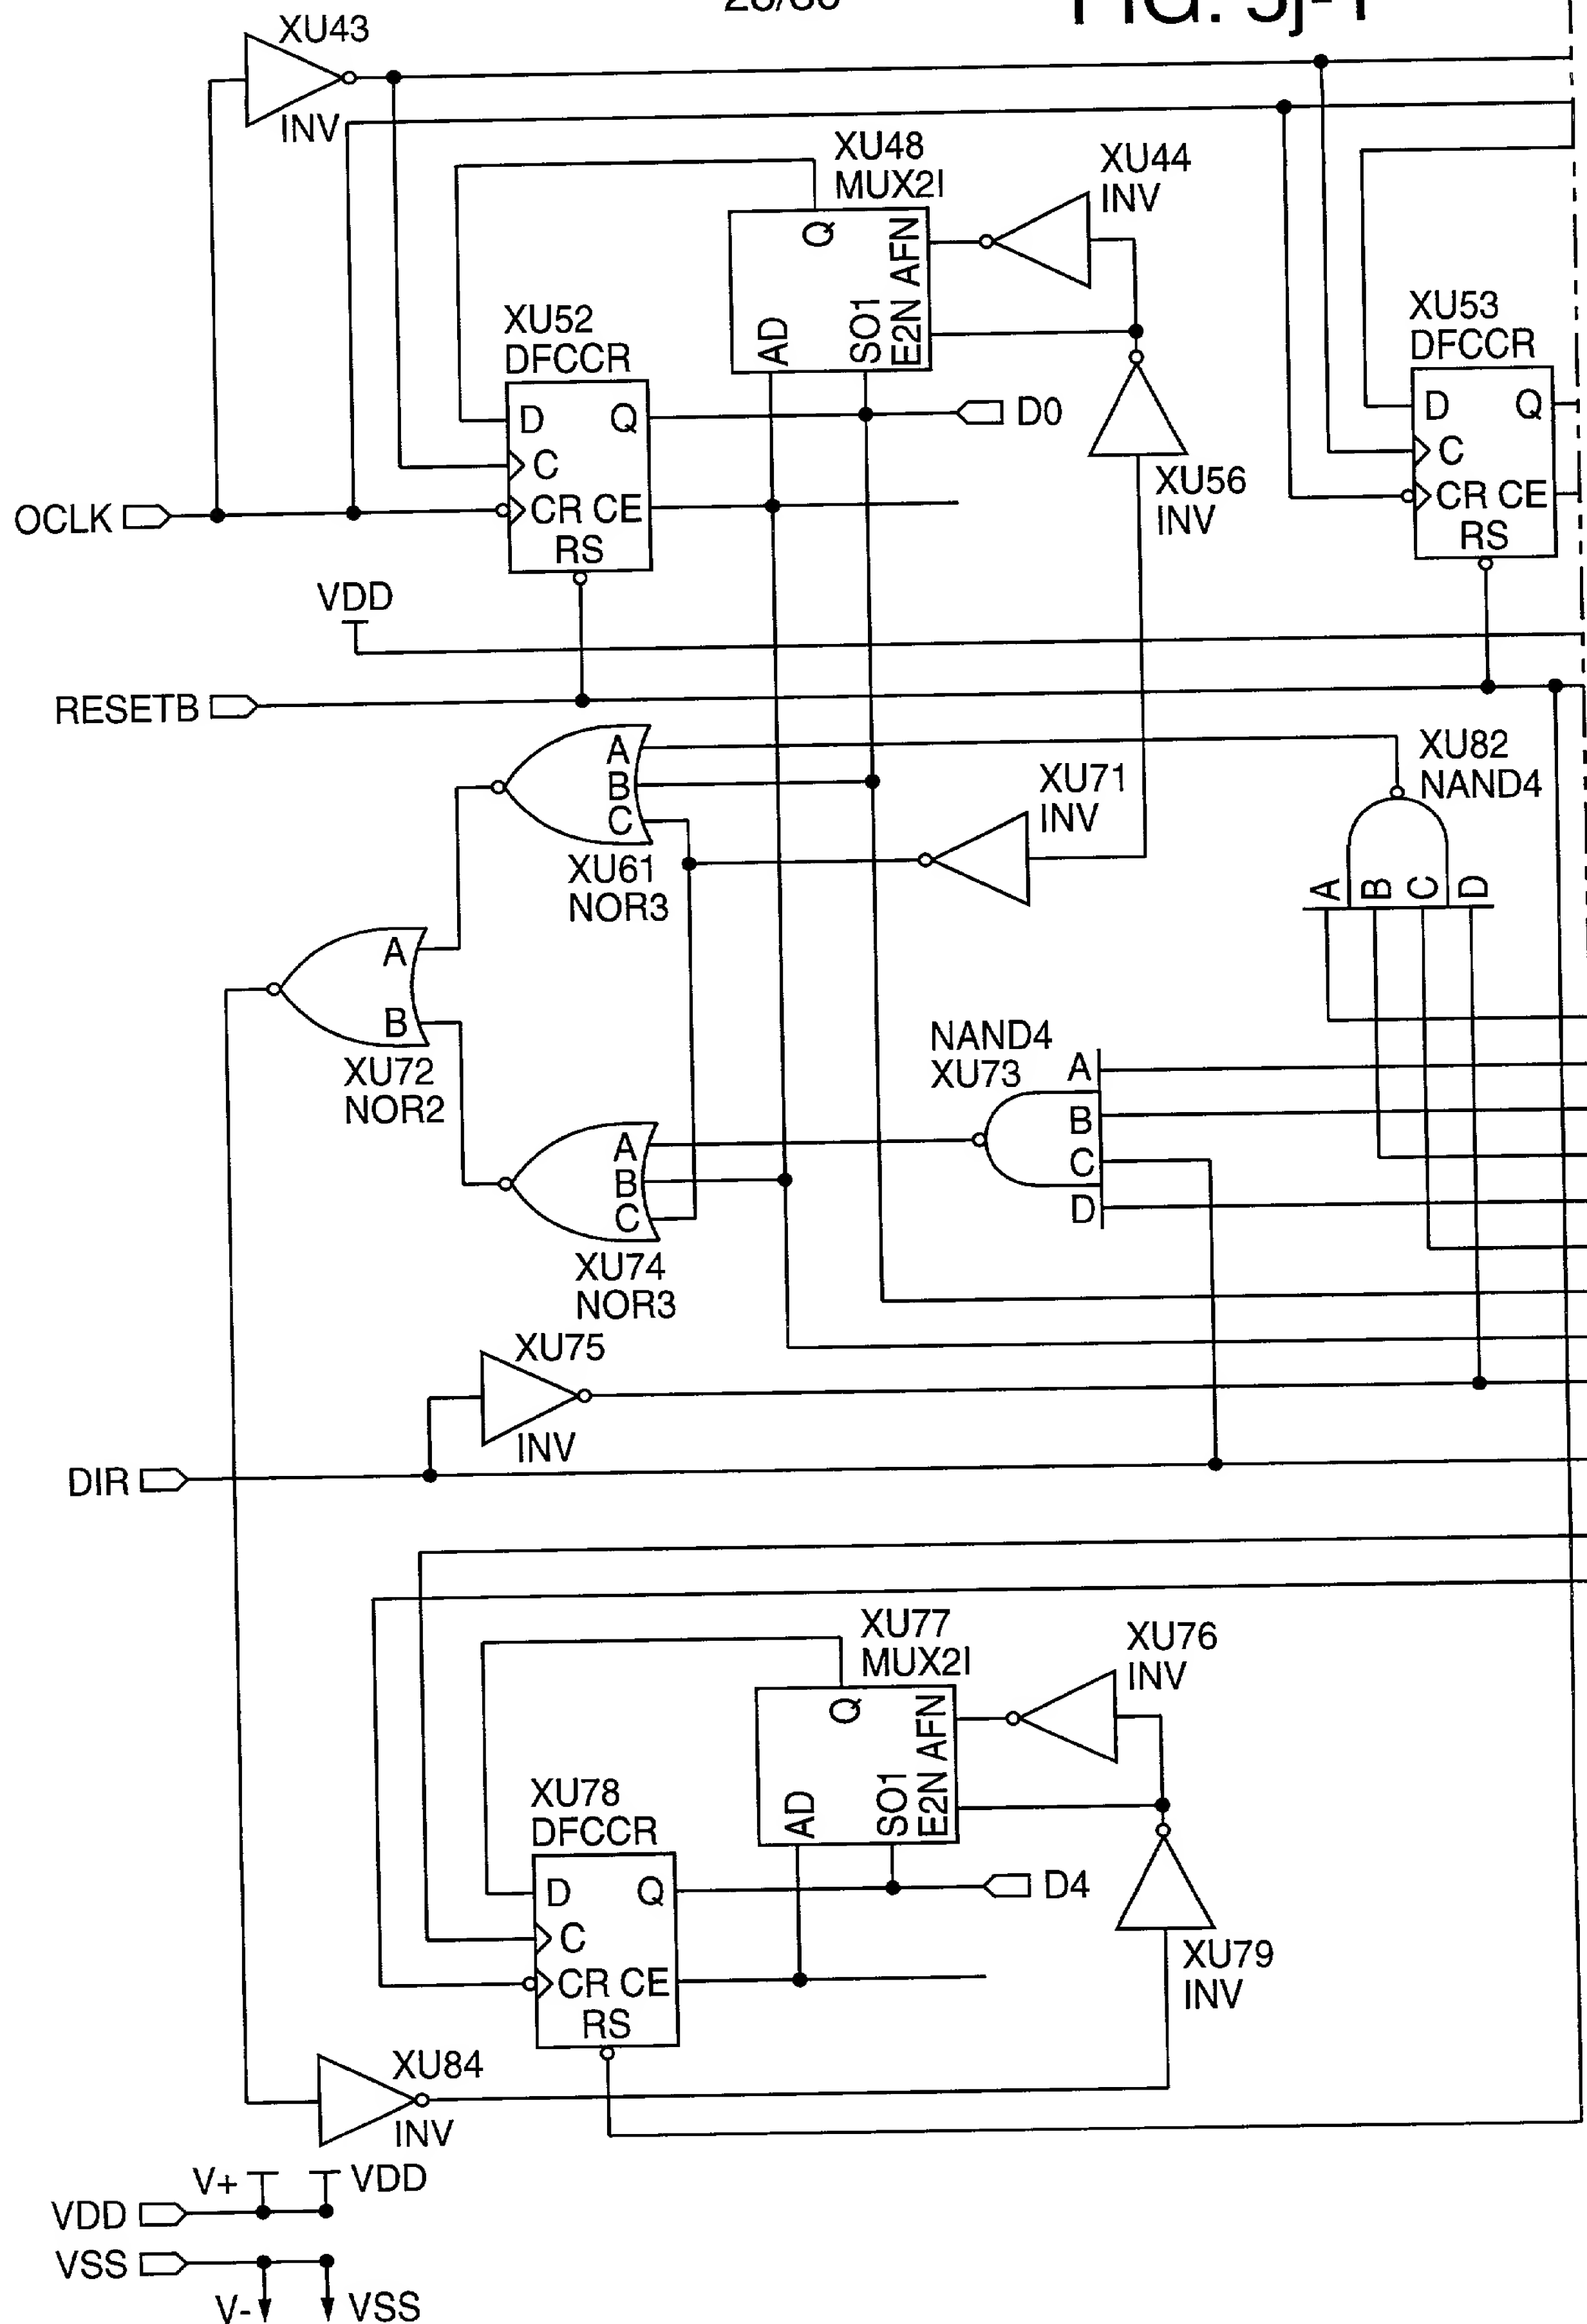

098379-0830

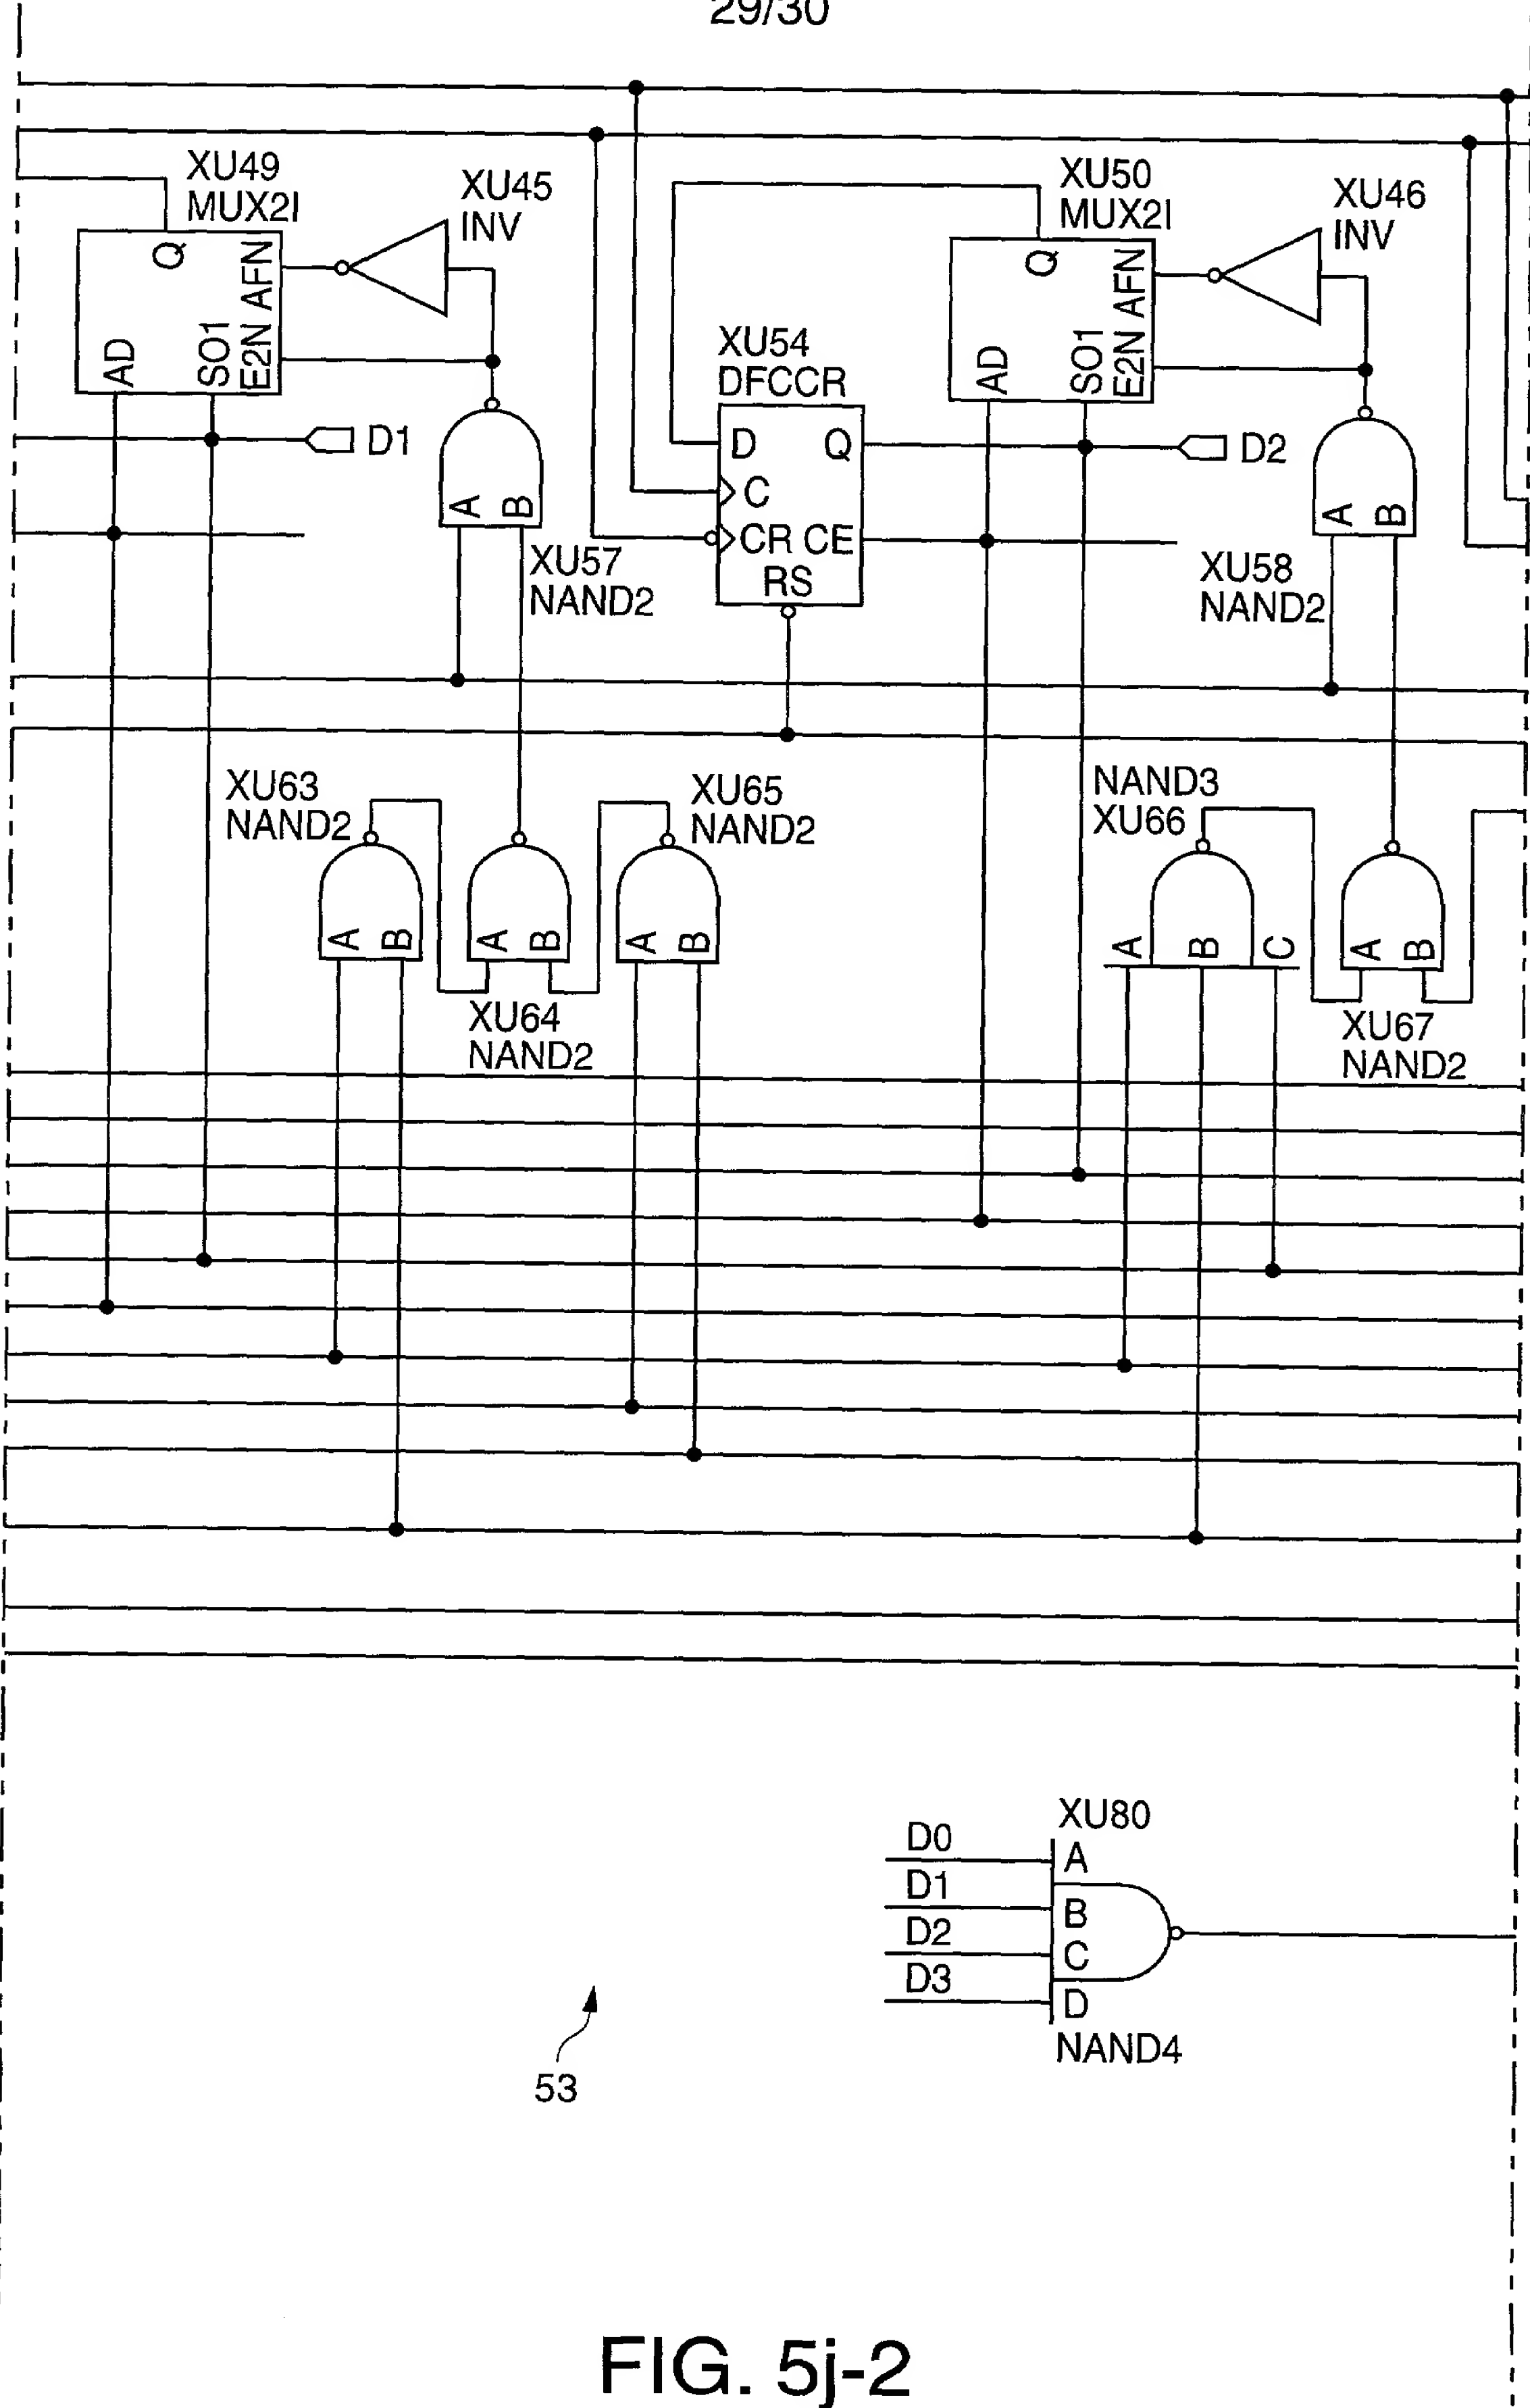


FIG. 5j-2

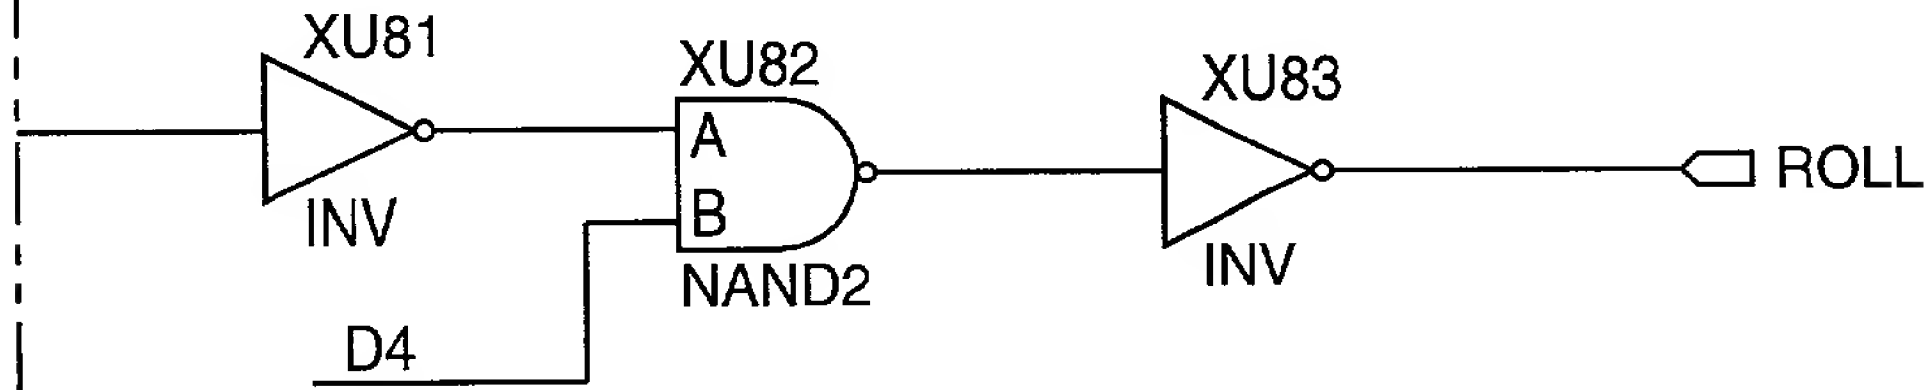
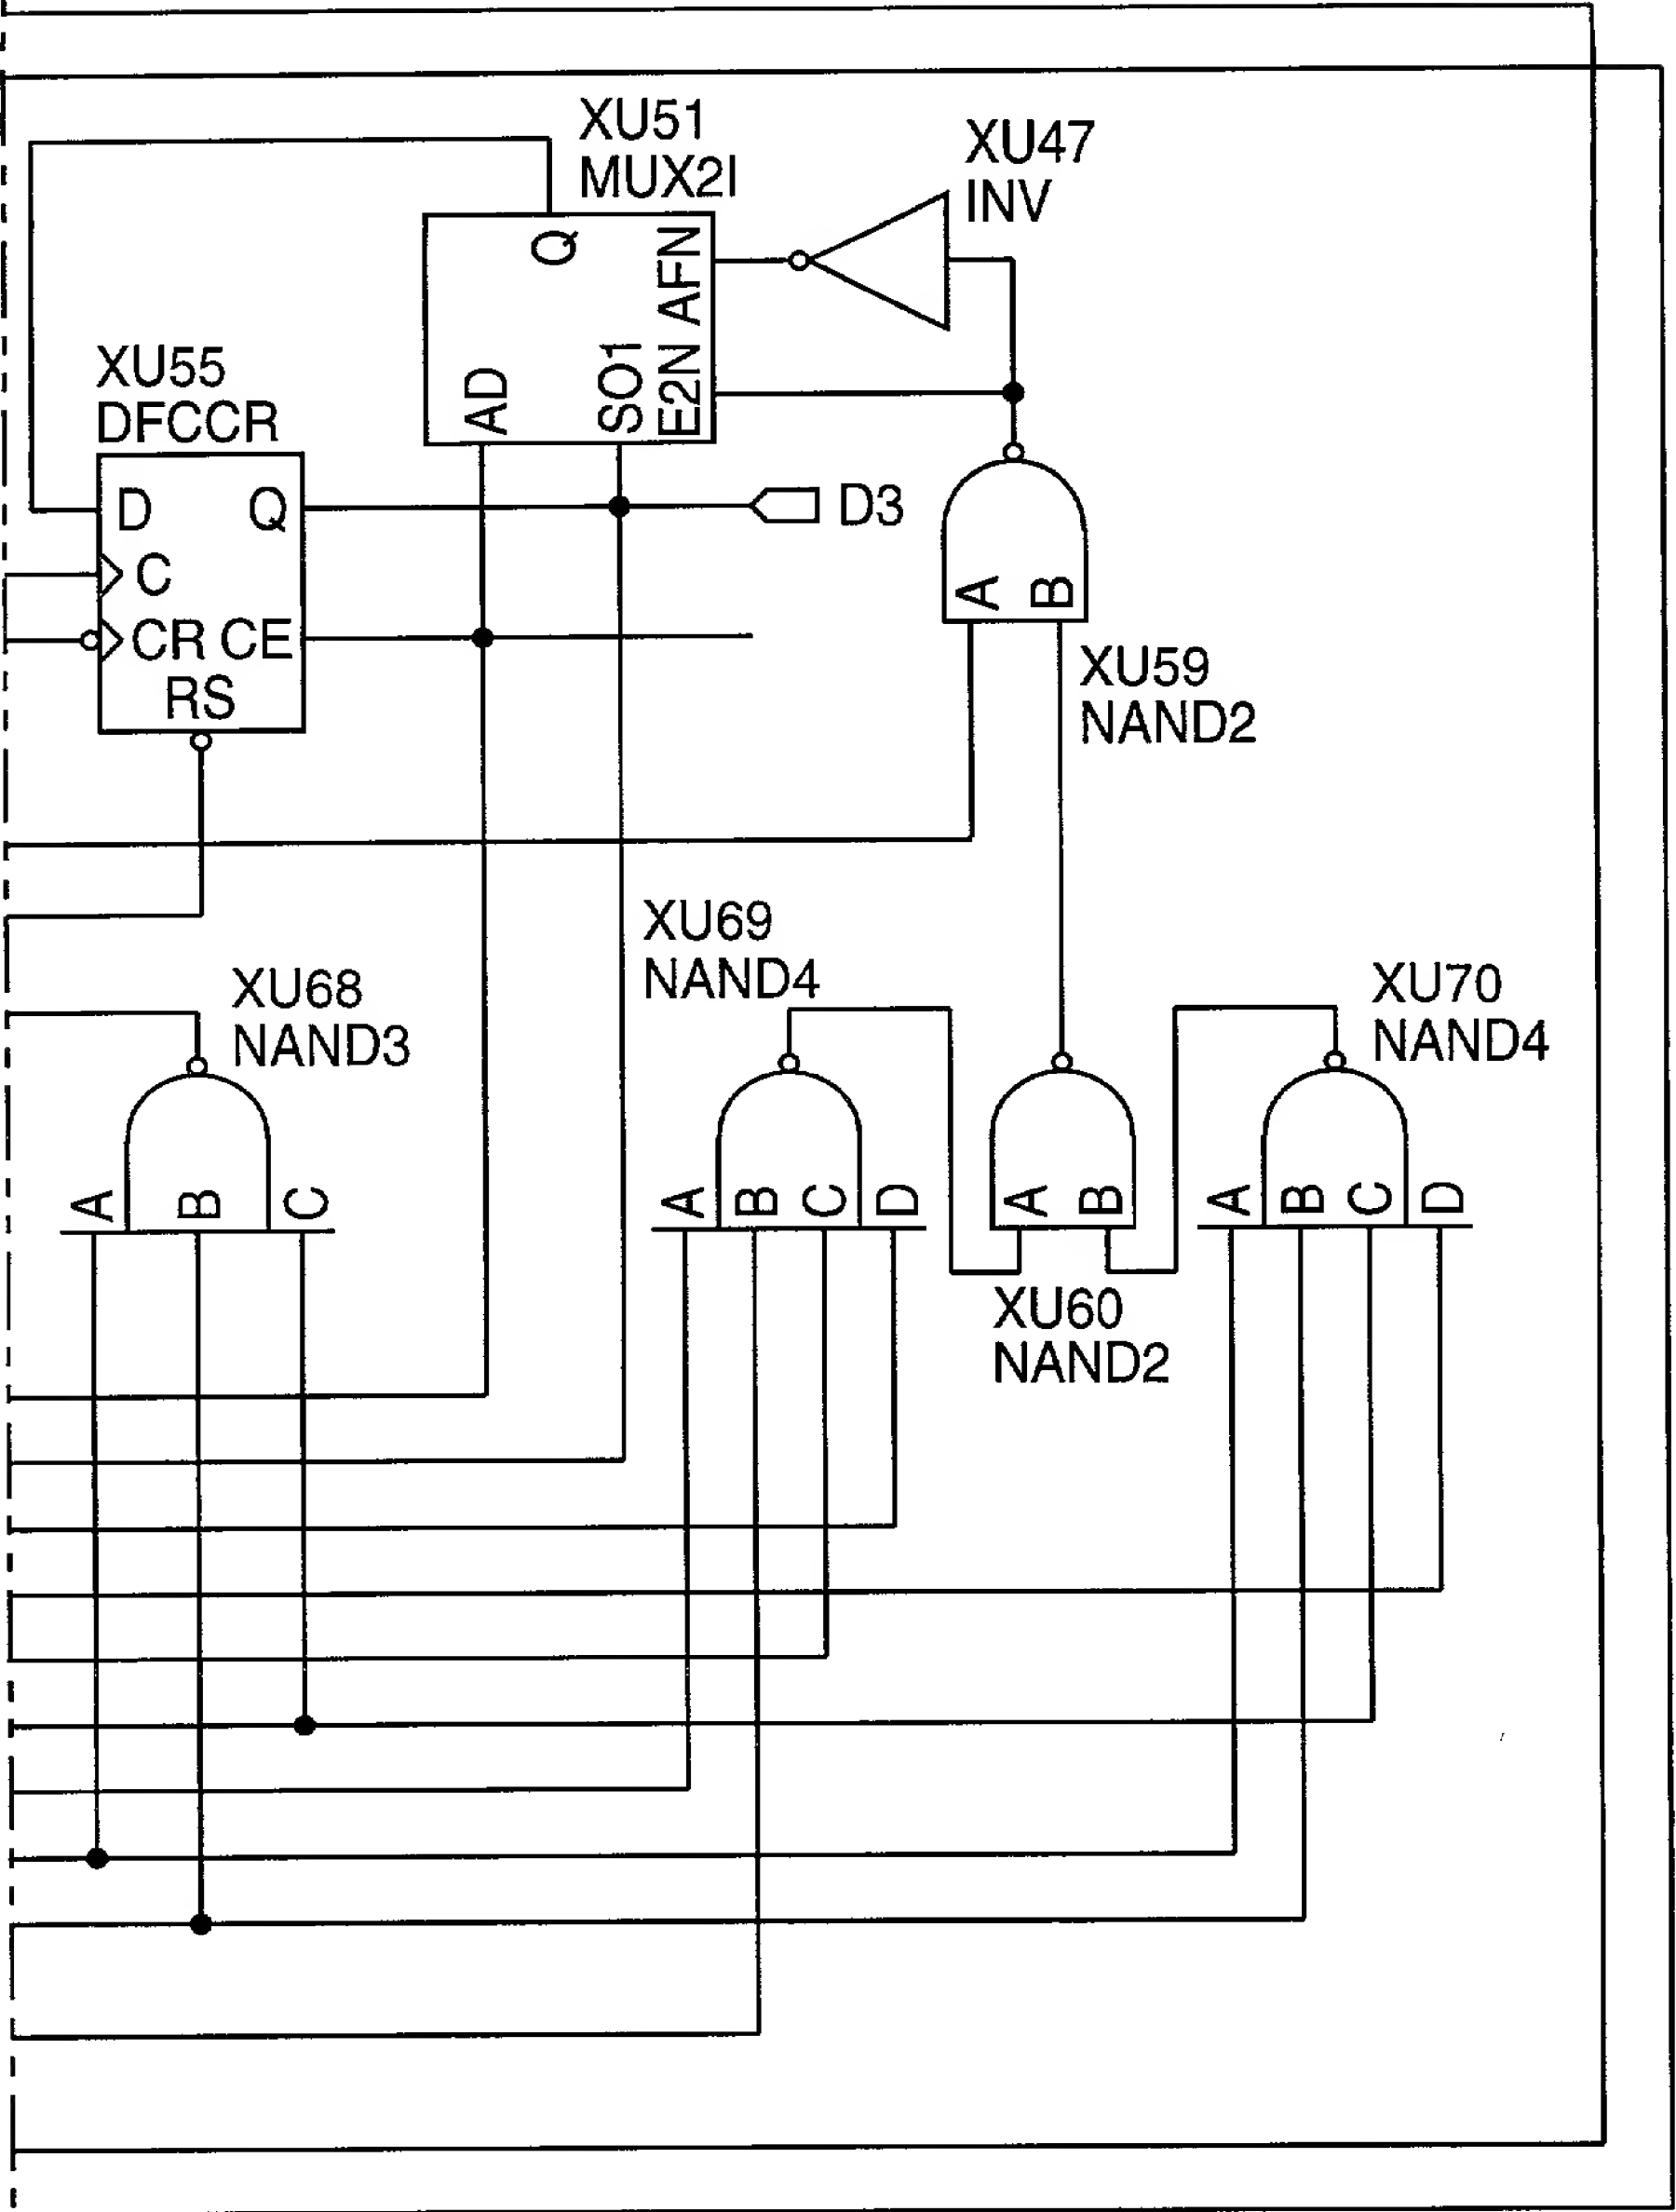


FIG. 5j-3

FIG. 5j

FIG. 5j-1	FIG. 5j-2	FIG. 5j-3
-----------	-----------	-----------